

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P980886

Luminaire Tested: **UFLD-CA-140-750-U-33**

Issue Date: 04/10/2025



Test Information

Test Method: LM-79-08
Report Number: P980886
Test Lab: INNOVATION CENTER(G2)
Issue Date: 04/10/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: UFLD-CA-140-750-U-33
Description: UTILITY FLOOD MEDIUM SIZE 140W 70CRI 5000K LED FIXTURE NEMA 3
Light Source: (8) 5000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	16922.4 lumens	Max Intensity:	92574.5 candela
Efficiency:	N/A	Max Intensity Angle:	2°H x 2°V
Efficacy:	123.2 lumens/watt		
Luminous Opening:	Rectangular (W 0.75' x L: 0.38' x H: 0')		
Beam Angle (50%):	20.9°H x 20.7°V	Field Angle (10%):	45.3°H x 44.8°V
Beam Lumens:	7327.8 lumens	Field Lumens:	14927 lumens
Beam Efficiency:	43.3%	Field Efficiency:	88.2%

Input Watts (W): 137.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.99
Total Harmonic Distortion (THDi): 2.72%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

Iso-Candela Plot

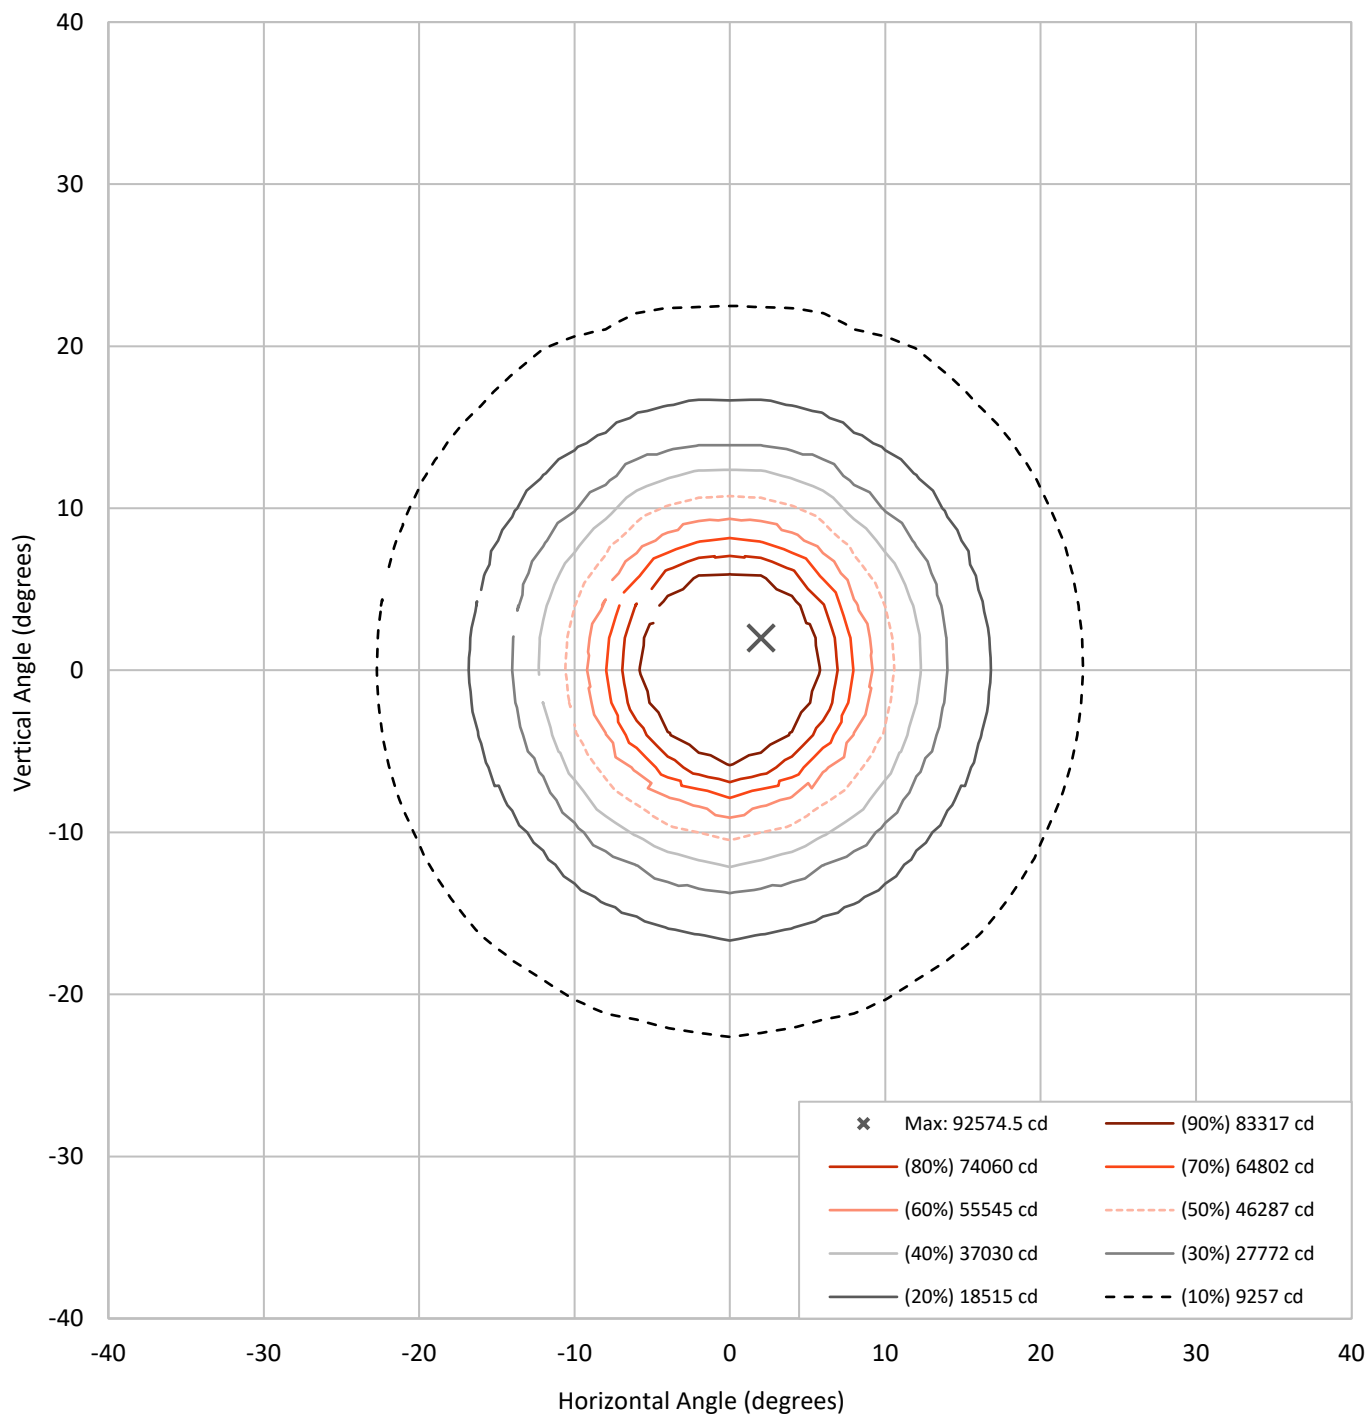

REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33


Lumen Table

90																				
80	0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0					
70	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
60			0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			0.0			
50	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0					
40			0.0	0.0	0.0	0.0	0.0	1.1	4.6	4.6	1.1	0.0	0.0	0.0			0.0	0.0		
30	0.0		0.0	0.0	0.0	0.0	9.4	88.4	178.6	178.6	88.4	9.4	0.0	0.0	0.0	0.0				
20			0.0	0.0	0.0	1.6	86.9	342.4	702.2	702.2	342.4	86.9	1.6	0.0	0.0		0.0			
10	0.0		0.0	0.0	0.0	7.5	173.7	685.3	2037.9	2037.9	685.3	173.7	7.5	0.0	0.0	0.0				
0			0.0	0.0	0.0	7.2	170.3	661.2	1963.2	1963.2	661.2	170.3	7.2	0.0	0.0		0.0			
-10	0.0		0.0	0.0	0.0	1.3	80.5	328.0	659.4	659.4	328.0	80.5	1.3	0.0	0.0	0.0				
-20			0.0	0.0	0.0	0.0	7.6	82.5	174.6	174.6	82.5	7.6	0.0	0.0	0.0		0.0			
-30	0.0		0.0	0.0	0.0	0.0	0.0	0.8	4.9	4.9	0.8	0.0	0.0	0.0	0.0	0.0				
-40			0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0			
-50	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
-60			0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0			
-70	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
-80			0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0			
-90	0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0					
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	
	Horizontal Angle (degrees)																			

REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33


Luminous Intensity Polar Plot

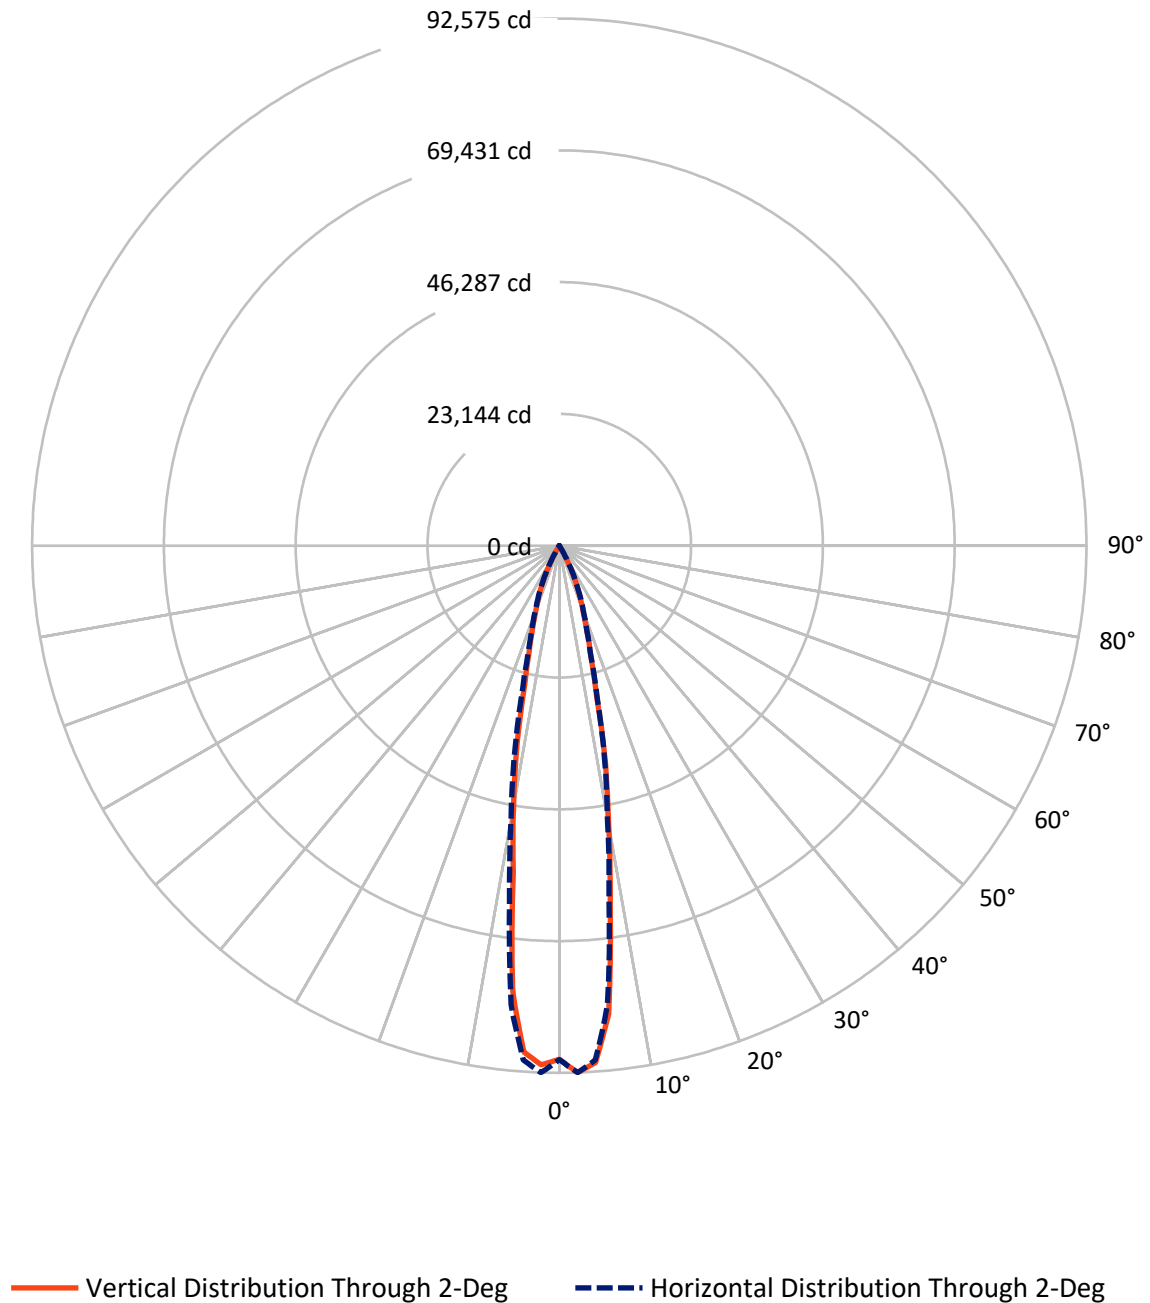

REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

Luminous Intensity Plot

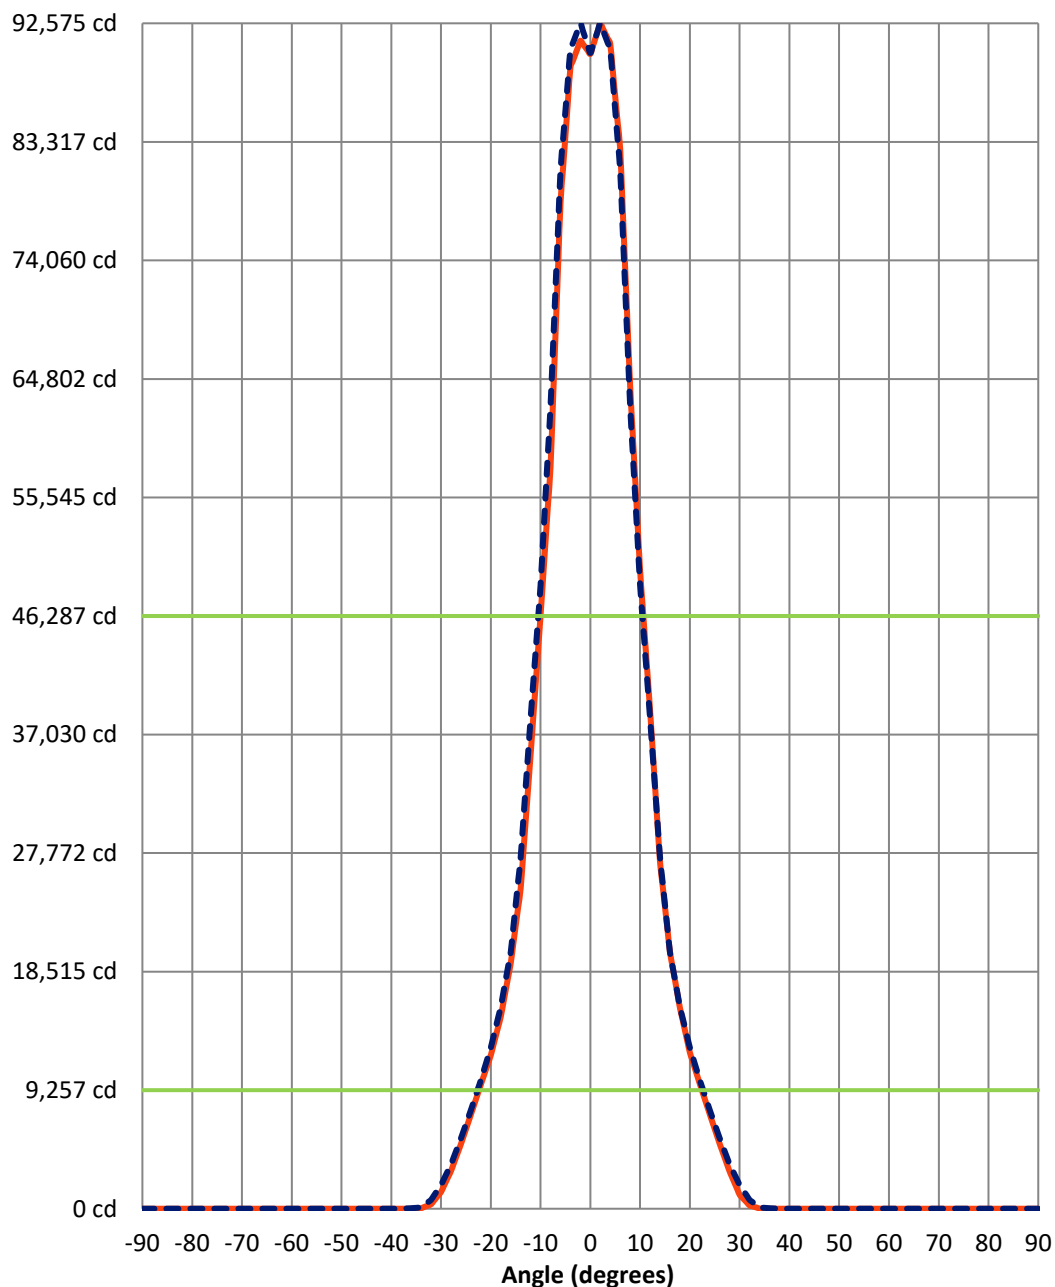

Beam:
H Angle: 20.9°
V Angle: 20.7°
Lumens: 7327.8
Efficiency: 43.3%

Field:
H Angle: 45.3°
V Angle: 44.8°
Lumens: 14927
Efficiency: 88.2%

Spill:
Lumens: 1995.4
Efficiency: 11.8%

— Vertical Distribution through 2-Deg
- - Horizontal Distribution through 2-Deg



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

FIELD
BEAM

CANDELA DISTRIBUTION:

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	8.7	17.5	8.7	8.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	222.5	257.5	244.4	309.8	200.7	209.5	104.7	13.1	0.0	0.0	0.0
30°	1021.1	1086.5	1056.0	1191.3	798.5	820.4	589.1	292.4	130.9	34.9	0.0
28°	2836.4	2893.1	2766.5	2736.0	2085.8	2020.4	1640.7	999.3	576.0	288.0	74.2
26°	5026.9	5057.5	4939.6	4804.4	3922.9	3752.7	3198.5	2155.6	1470.5	885.8	440.7
24°	7400.7	7374.5	7291.6	7029.8	6034.9	5733.8	5079.3	3792.0	2801.5	1898.2	1191.3
22°	9840.0	9744.0	9669.8	9307.6	8242.9	7806.5	7086.5	5664.0	4407.3	3250.9	2277.8
20°	12288.0	12192.0	12048.0	11629.1	10372.4	9874.9	9111.3	7645.1	6178.9	4852.4	3565.1
18°	15600.0	15687.3	15294.5	14539.6	12859.6	11991.3	10965.8	9495.3	7928.7	6449.5	4957.1
16°	19959.3	20042.2	19173.8	18165.8	15861.8	14674.9	13082.2	11227.6	9534.5	8050.9	6414.5
14°	27141.8	27072.0	25396.4	23428.4	19819.6	17694.5	15652.4	13234.9	11092.4	9442.9	7714.9
12°	39338.2	38941.1	36165.8	32264.7	25365.8	21525.8	18584.7	15469.1	12728.7	10721.5	8871.3
10°	50395.6	49832.7	47162.2	42589.1	33979.6	27067.6	22075.6	17829.8	14544.0	12061.1	9883.6
8°	66034.9	64215.3	58350.5	51216.0	43200.0	34529.5	26866.9	20434.9	16258.9	13282.9	10826.2
6°	83000.7	82721.5	75844.4	62535.3	50256.0	41485.1	31906.9	23336.7	17834.2	14356.4	11598.5
4°	91322.2	90973.1	86382.5	74814.5	56757.8	46158.5	35969.5	25797.8	19143.3	15194.2	12161.5
2°	90257.5	92574.5	90532.4	81037.1	62679.3	48689.5	38308.4	27451.6	20020.4	15761.5	12580.4



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
0°	89742.5	90178.9	90820.4	82481.5	64372.4	49383.3	38674.9	27783.3	20277.8	15918.5	12645.8
-2°	92029.1	91213.1	89035.6	79230.5	61440.0	48209.5	37143.3	26701.1	19845.8	15639.3	12405.8
-4°	91077.8	89127.3	82686.5	69901.1	55108.4	45364.4	33661.1	24576.0	18868.4	15019.6	11952.0
-6°	82686.5	78497.5	69552.0	56919.3	48693.8	39866.2	29096.7	21957.8	17467.6	14103.3	11284.4
-8°	63556.4	57931.6	54043.6	47685.8	41611.6	32522.2	24336.0	19339.6	15866.2	12999.3	10512.0
-10°	49003.6	46324.4	43880.7	38173.1	32413.1	25745.5	20295.3	16865.5	14164.4	11781.8	9600.0
-12°	37745.5	35458.9	32561.5	27914.2	24418.9	20696.7	17122.9	14644.4	12519.3	10564.4	8626.9
-14°	26426.2	25003.6	23550.5	21124.4	19296.0	16970.2	14465.5	12562.9	10992.0	9264.0	7426.9
-16°	19933.1	19156.4	18318.5	16791.3	15678.5	14024.7	12157.1	10808.7	9547.6	7893.8	6130.9
-18°	15682.9	14980.4	14474.2	13527.3	12776.7	11559.3	10302.5	9163.6	7941.8	6296.7	4695.3
-20°	12349.1	11982.5	11554.9	10970.2	10546.9	9600.0	8408.7	7309.1	6183.3	4664.7	3312.0
-22°	9997.1	9696.0	9338.2	8770.9	8352.0	7470.5	6344.7	5506.9	4481.5	3159.3	2090.2
-24°	7640.7	7352.7	7038.5	6493.1	6087.3	5319.3	4363.6	3696.0	2897.5	1793.5	1029.8
-26°	5336.7	5048.7	4795.6	4285.1	3949.1	3320.7	2600.7	2107.6	1505.5	763.6	349.1
-28°	3211.6	2941.1	2770.9	2325.8	2090.2	1649.5	1230.5	907.6	576.0	226.9	43.6
-30°	1474.9	1304.7	1200.0	907.6	798.5	549.8	370.9	257.5	130.9	21.8	0.0
-32°	427.6	344.7	292.4	213.8	196.4	104.7	39.3	13.1	4.4	0.0	0.0
-34°	65.5	39.3	13.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886
CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	21.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	200.7	34.9	8.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	628.4	187.6	74.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	1378.9	558.5	244.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	2352.0	1248.0	593.5	61.1	34.9	0.0	0.0	0.0	0.0	0.0	0.0
18°	3464.7	2107.6	1108.4	244.4	130.9	0.0	0.0	0.0	0.0	0.0	0.0
16°	4660.4	3050.2	1771.6	610.9	318.5	0.0	0.0	0.0	0.0	0.0	0.0
14°	5777.5	4010.2	2491.6	1134.5	549.8	56.7	0.0	0.0	0.0	0.0	0.0
12°	6881.5	4952.7	3216.0	1680.0	829.1	148.4	0.0	0.0	0.0	0.0	0.0
10°	7854.5	5799.3	3896.7	2199.3	1104.0	261.8	4.4	4.4	0.0	0.0	0.0
8°	8666.2	6510.5	4477.1	2653.1	1365.8	405.8	30.5	13.1	0.0	0.0	0.0
6°	9312.0	7082.2	4952.7	3024.0	1588.4	532.4	56.7	21.8	0.0	0.0	0.0
4°	9761.5	7483.6	5301.8	3298.9	1758.5	632.7	78.5	34.9	0.0	0.0	0.0
2°	10036.4	7701.8	5493.8	3451.6	1854.5	693.8	96.0	39.3	0.0	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
0°	10110.5	7767.3	5546.2	3490.9	1885.1	715.6	100.4	43.6	0.0	0.0	0.0
-2°	9979.6	7662.5	5445.8	3403.6	1824.0	685.1	96.0	39.3	0.0	0.0	0.0
-4°	9665.5	7383.3	5184.0	3202.9	1697.5	610.9	78.5	34.9	0.0	0.0	0.0
-6°	9176.7	6938.2	4786.9	2888.7	1501.1	501.8	52.4	21.8	0.0	0.0	0.0
-8°	8513.5	6331.6	4276.4	2482.9	1256.7	370.9	26.2	13.1	0.0	0.0	0.0
-10°	7666.9	5563.6	3652.4	2011.6	990.5	235.6	4.4	0.0	0.0	0.0	0.0
-12°	6676.4	4673.5	2945.5	1488.0	720.0	130.9	0.0	0.0	0.0	0.0	0.0
-14°	5554.9	3700.4	2199.3	938.2	453.8	48.0	0.0	0.0	0.0	0.0	0.0
-16°	4359.3	2709.8	1488.0	427.6	226.9	0.0	0.0	0.0	0.0	0.0	0.0
-18°	3168.0	1762.9	881.5	144.0	78.5	0.0	0.0	0.0	0.0	0.0	0.0
-20°	2059.6	925.1	427.6	30.5	17.5	0.0	0.0	0.0	0.0	0.0	0.0
-22°	1147.6	318.5	148.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	488.7	100.4	43.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	144.0	13.1	4.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	13.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886
CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886
CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886
CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	88°	90°
90°	0.0	0.0
88°	0.0	0.0
86°	0.0	0.0
84°	0.0	0.0
82°	0.0	0.0
80°	0.0	0.0
78°	0.0	0.0
76°	0.0	0.0
74°	0.0	0.0
72°	0.0	0.0
70°	0.0	0.0
68°	0.0	0.0
66°	0.0	0.0
64°	0.0	0.0
62°	0.0	0.0
60°	0.0	0.0
58°	0.0	0.0
56°	0.0	0.0
54°	0.0	0.0
52°	0.0	0.0
50°	0.0	0.0
48°	0.0	0.0
46°	0.0	0.0
44°	0.0	0.0
42°	0.0	0.0
40°	0.0	0.0
38°	0.0	0.0
36°	0.0	0.0
34°	0.0	0.0
32°	0.0	0.0
30°	0.0	0.0
28°	0.0	0.0
26°	0.0	0.0
24°	0.0	0.0
22°	0.0	0.0
20°	0.0	0.0
18°	0.0	0.0
16°	0.0	0.0
14°	0.0	0.0
12°	0.0	0.0
10°	0.0	0.0
8°	0.0	0.0
6°	0.0	0.0
4°	0.0	0.0
2°	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	88°	90°
0°	0.0	0.0
-2°	0.0	0.0
-4°	0.0	0.0
-6°	0.0	0.0
-8°	0.0	0.0
-10°	0.0	0.0
-12°	0.0	0.0
-14°	0.0	0.0
-16°	0.0	0.0
-18°	0.0	0.0
-20°	0.0	0.0
-22°	0.0	0.0
-24°	0.0	0.0
-26°	0.0	0.0
-28°	0.0	0.0
-30°	0.0	0.0
-32°	0.0	0.0
-34°	0.0	0.0
-36°	0.0	0.0
-38°	0.0	0.0
-40°	0.0	0.0
-42°	0.0	0.0
-44°	0.0	0.0
-46°	0.0	0.0
-48°	0.0	0.0
-50°	0.0	0.0
-52°	0.0	0.0
-54°	0.0	0.0
-56°	0.0	0.0
-58°	0.0	0.0
-60°	0.0	0.0
-62°	0.0	0.0
-64°	0.0	0.0
-66°	0.0	0.0
-68°	0.0	0.0
-70°	0.0	0.0
-72°	0.0	0.0
-74°	0.0	0.0
-76°	0.0	0.0
-78°	0.0	0.0
-80°	0.0	0.0
-82°	0.0	0.0
-84°	0.0	0.0
-86°	0.0	0.0
-88°	0.0	0.0



REPORT NUMBER: P980886

CATALOG NUMBER: UFLD-CA-140-750-U-33

CANDELA DISTRIBUTION (continued):

	88°	90°
-90°	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Lumark

Report Number: SP1-2501-319-4

Test Date: 02/04/2025

Luminaire Tested: NFFLD-C25-7050-33


Data in this report applies to families of products including NFFLD-C25-7050-33

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2501-319-4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 02/06/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Lumark
 Catalog Number: **NFFLD-C25-7050-33**
 Description: LUMARK NIGHT FALCON 10500LM NEMA 3

Spectral Parameters

CCT (K):	4926	CRI (Ra):	73.4		
CIE u':	0.2082	R1:	68.5	R9:	-41.9
CIE v':	0.4920	R2:	79.5	R10:	53.5
Duv:	0.0058	R3:	89.6	R11:	70.3
CIE x:	0.3485	R4:	72.7	R12:	49.9
CIE y:	0.3660	R5:	70.5	R13:	70.6
CIE z:	0.2855	R6:	72.9	R14:	94.4
Peak Wavelength (nm):	447	R7:	81.8	R15:	59.2
Dominant Wavelength (nm):	569	R8:	51.9		
Purity:	14.41917				
Rf:	76.7				
Rg:	93.5				

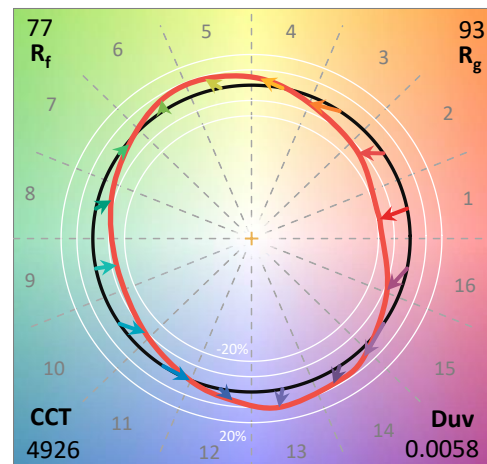

Test Conditions


Stabilization Time: 37M
 Operation Time: 1H 37M
 Sphere Temperature (°C): 24.9

REPORT NUMBER: SP1-2501-319-4


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	12/16/2024	6/16/2025
Power Meter	INXT2011004	1/21/2025	1/21/2026
AC Power Source	IN0063	10/22/2024	10/22/2025
DC Power Source	IN0208	10/22/2024	10/22/2025
Sphere Thermometer	IN0085	10/22/2024	10/22/2025
Room Thermometer	IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2501-319-4

CIE 1931 Chromaticity Diagram

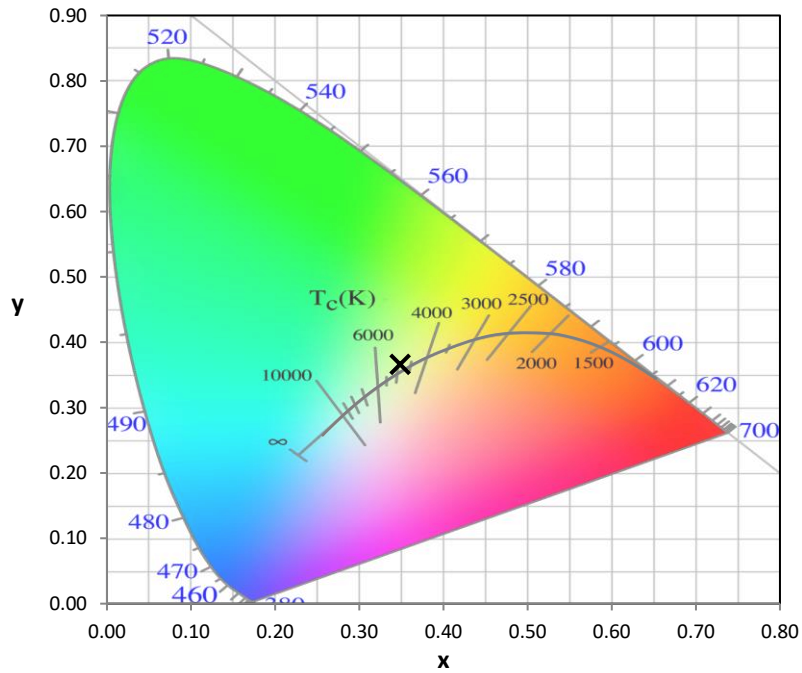


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

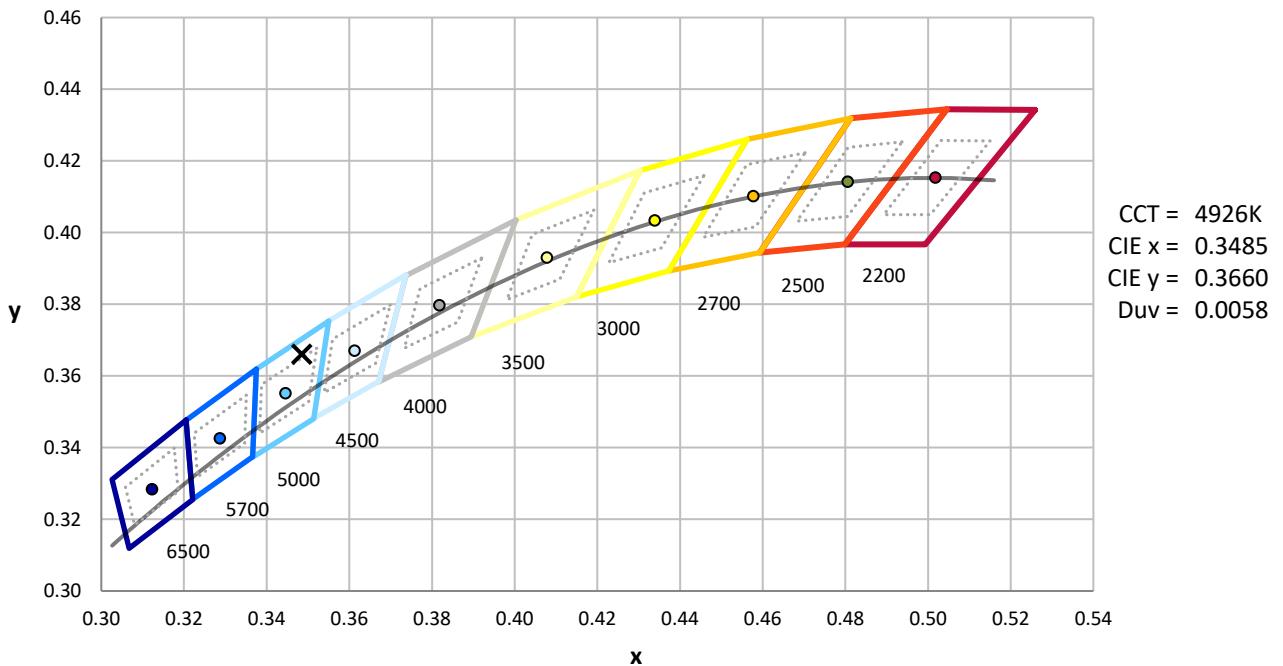

Point lies inside the ANSI 5000K 7-step quadrangle

REPORT NUMBER: SP1-2501-319-4

Photopic Flux vs. Wavelength

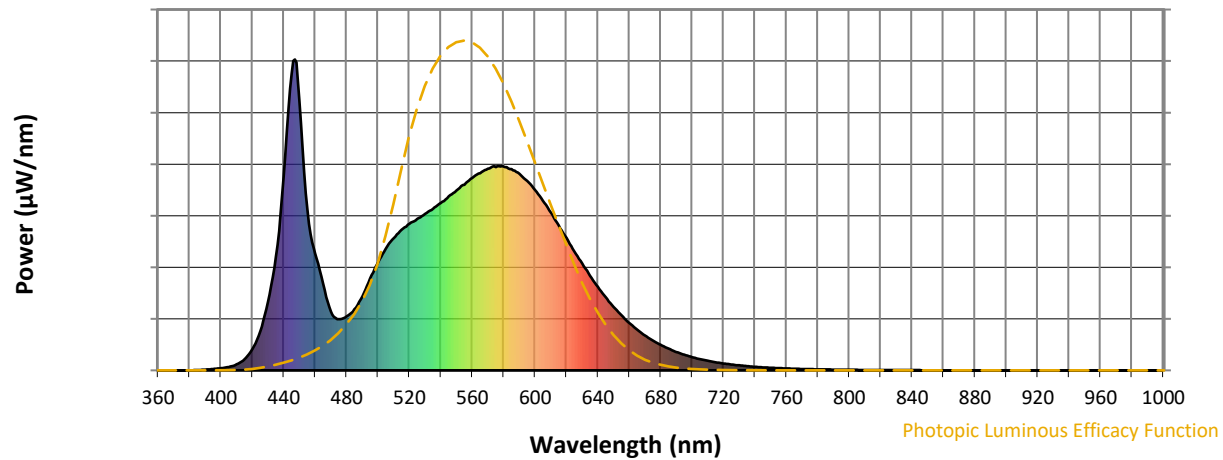


Photopic Lumens: NR

λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	238	NR	620	426	NR	750	8	NR	880	0	NR
365	0	NR	495	295	NR	625	383	NR	755	7	NR	885	0	NR
370	0	NR	500	347	NR	630	344	NR	760	6	NR	890	0	NR
375	0	NR	505	391	NR	635	305	NR	765	5	NR	895	0	NR
380	0	NR	510	426	NR	640	268	NR	770	5	NR	900	0	NR
385	1	NR	515	452	NR	645	235	NR	775	4	NR	905	0	NR
390	2	NR	520	471	NR	650	204	NR	780	3	NR	910	0	NR
395	4	NR	525	487	NR	655	177	NR	785	3	NR	915	0	NR
400	7	NR	530	504	NR	660	152	NR	790	2	NR	920	0	NR
405	11	NR	535	520	NR	665	131	NR	795	2	NR	925	0	NR
410	19	NR	540	539	NR	670	112	NR	800	2	NR	930	0	NR
415	36	NR	545	560	NR	675	96	NR	805	2	NR	935	0	NR
420	68	NR	550	578	NR	680	82	NR	810	1	NR	940	0	NR
425	126	NR	555	597	NR	685	70	NR	815	1	NR	945	0	NR
430	220	NR	560	619	NR	690	59	NR	820	1	NR	950	0	NR
435	367	NR	565	634	NR	695	50	NR	825	1	NR	955	0	NR
440	623	NR	570	648	NR	700	43	NR	830	1	NR	960	0	NR
445	954	NR	575	654	NR	705	36	NR	835	1	NR	965	0	NR
450	868	NR	580	656	NR	710	31	NR	840	1	NR	970	0	NR
455	519	NR	585	647	NR	715	26	NR	845	1	NR	975	0	NR
460	377	NR	590	632	NR	720	22	NR	850	0	NR	980	0	NR
465	280	NR	595	609	NR	725	19	NR	855	0	NR	985	0	NR
470	188	NR	600	580	NR	730	16	NR	860	0	NR	990	0	NR
475	164	NR	605	545	NR	735	14	NR	865	0	NR	995	0	NR
480	174	NR	610	507	NR	740	11	NR	870	0	NR	1000	0	NR
485	196	NR	615	467	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-4

Scotopic Flux vs. Wavelength

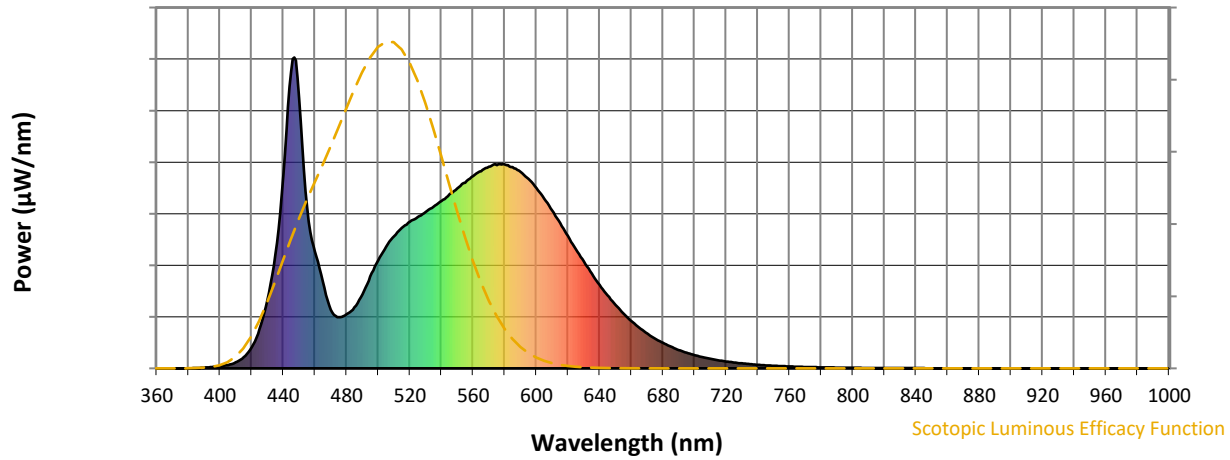


Scotopic Lumens: NR

S/P: 1.82

λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)
360	0	NR	490	238	NR	620	426	NR	750	8	NR	880	0	NR
365	0	NR	495	295	NR	625	383	NR	755	7	NR	885	0	NR
370	0	NR	500	347	NR	630	344	NR	760	6	NR	890	0	NR
375	0	NR	505	391	NR	635	305	NR	765	5	NR	895	0	NR
380	0	NR	510	426	NR	640	268	NR	770	5	NR	900	0	NR
385	1	NR	515	452	NR	645	235	NR	775	4	NR	905	0	NR
390	2	NR	520	471	NR	650	204	NR	780	3	NR	910	0	NR
395	4	NR	525	487	NR	655	177	NR	785	3	NR	915	0	NR
400	7	NR	530	504	NR	660	152	NR	790	2	NR	920	0	NR
405	11	NR	535	520	NR	665	131	NR	795	2	NR	925	0	NR
410	19	NR	540	539	NR	670	112	NR	800	2	NR	930	0	NR
415	36	NR	545	560	NR	675	96	NR	805	2	NR	935	0	NR
420	68	NR	550	578	NR	680	82	NR	810	1	NR	940	0	NR
425	126	NR	555	597	NR	685	70	NR	815	1	NR	945	0	NR
430	220	NR	560	619	NR	690	59	NR	820	1	NR	950	0	NR
435	367	NR	565	634	NR	695	50	NR	825	1	NR	955	0	NR
440	623	NR	570	648	NR	700	43	NR	830	1	NR	960	0	NR
445	954	NR	575	654	NR	705	36	NR	835	1	NR	965	0	NR
450	868	NR	580	656	NR	710	31	NR	840	1	NR	970	0	NR
455	519	NR	585	647	NR	715	26	NR	845	1	NR	975	0	NR
460	377	NR	590	632	NR	720	22	NR	850	0	NR	980	0	NR
465	280	NR	595	609	NR	725	19	NR	855	0	NR	985	0	NR
470	188	NR	600	580	NR	730	16	NR	860	0	NR	990	0	NR
475	164	NR	605	545	NR	735	14	NR	865	0	NR	995	0	NR
480	174	NR	610	507	NR	740	11	NR	870	0	NR	1000	0	NR
485	196	NR	615	467	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-4

Melanopic Flux vs. Wavelength

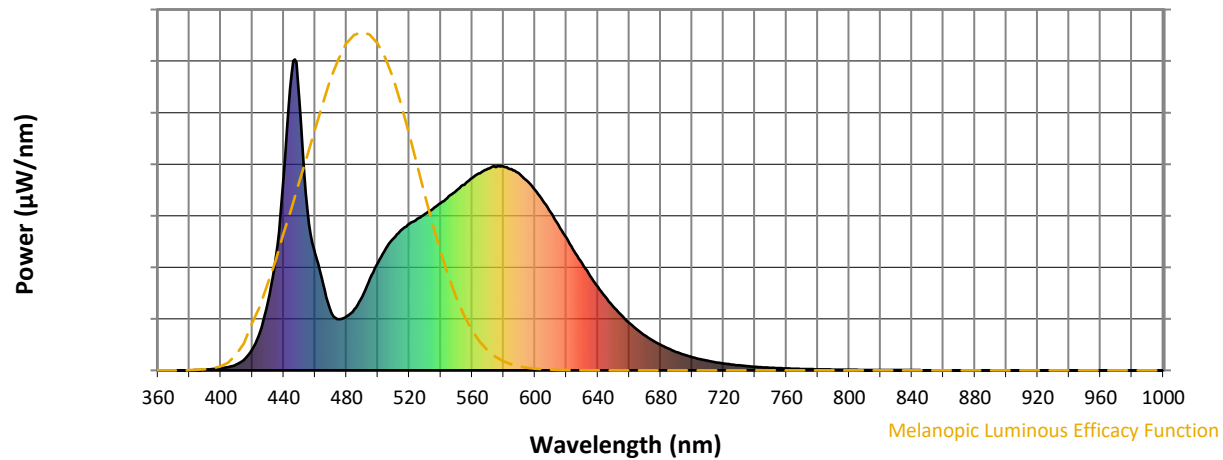
Melanopic Lumens: NR
M/P: 3.73


λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	238	NR	620	426	NR	750	8	NR	880	0	NR
365	0	NR	495	295	NR	625	383	NR	755	7	NR	885	0	NR
370	0	NR	500	347	NR	630	344	NR	760	6	NR	890	0	NR
375	0	NR	505	391	NR	635	305	NR	765	5	NR	895	0	NR
380	0	NR	510	426	NR	640	268	NR	770	5	NR	900	0	NR
385	1	NR	515	452	NR	645	235	NR	775	4	NR	905	0	NR
390	2	NR	520	471	NR	650	204	NR	780	3	NR	910	0	NR
395	4	NR	525	487	NR	655	177	NR	785	3	NR	915	0	NR
400	7	NR	530	504	NR	660	152	NR	790	2	NR	920	0	NR
405	11	NR	535	520	NR	665	131	NR	795	2	NR	925	0	NR
410	19	NR	540	539	NR	670	112	NR	800	2	NR	930	0	NR
415	36	NR	545	560	NR	675	96	NR	805	2	NR	935	0	NR
420	68	NR	550	578	NR	680	82	NR	810	1	NR	940	0	NR
425	126	NR	555	597	NR	685	70	NR	815	1	NR	945	0	NR
430	220	NR	560	619	NR	690	59	NR	820	1	NR	950	0	NR
435	367	NR	565	634	NR	695	50	NR	825	1	NR	955	0	NR
440	623	NR	570	648	NR	700	43	NR	830	1	NR	960	0	NR
445	954	NR	575	654	NR	705	36	NR	835	1	NR	965	0	NR
450	868	NR	580	656	NR	710	31	NR	840	1	NR	970	0	NR
455	519	NR	585	647	NR	715	26	NR	845	1	NR	975	0	NR
460	377	NR	590	632	NR	720	22	NR	850	0	NR	980	0	NR
465	280	NR	595	609	NR	725	19	NR	855	0	NR	985	0	NR
470	188	NR	600	580	NR	730	16	NR	860	0	NR	990	0	NR
475	164	NR	605	545	NR	735	14	NR	865	0	NR	995	0	NR
480	174	NR	610	507	NR	740	11	NR	870	0	NR	1000	0	NR
485	196	NR	615	467	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-4





TM-30-18

Summary

$R_f = 76.7$
 $R_g = 93.5$
 CIE $R_a = 73.4$
 $R_g = -41.9$

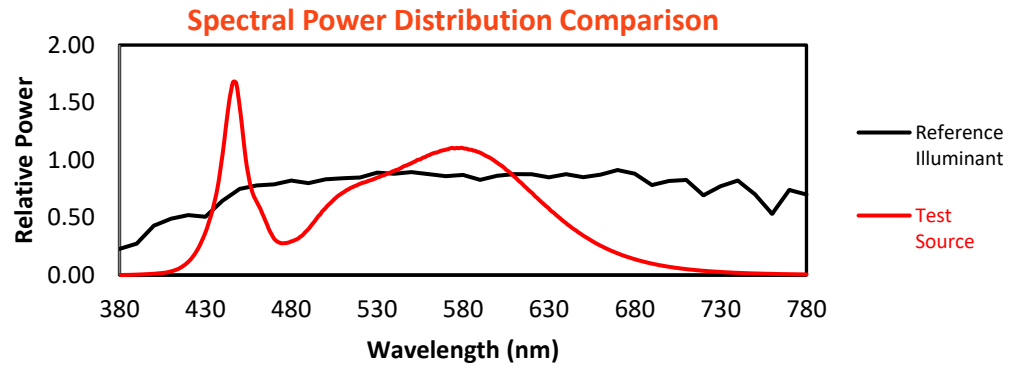


Color Vector Graphics

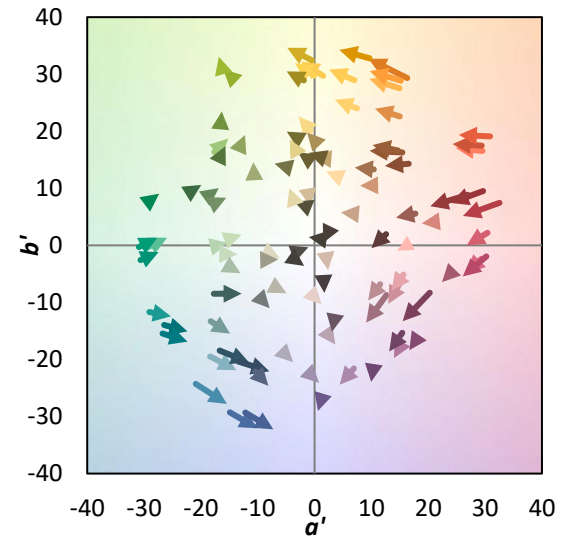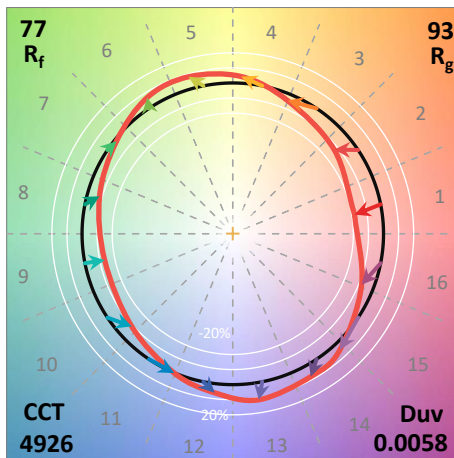
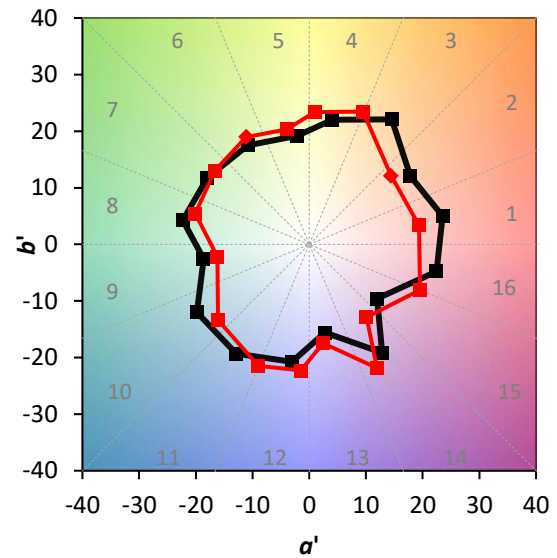
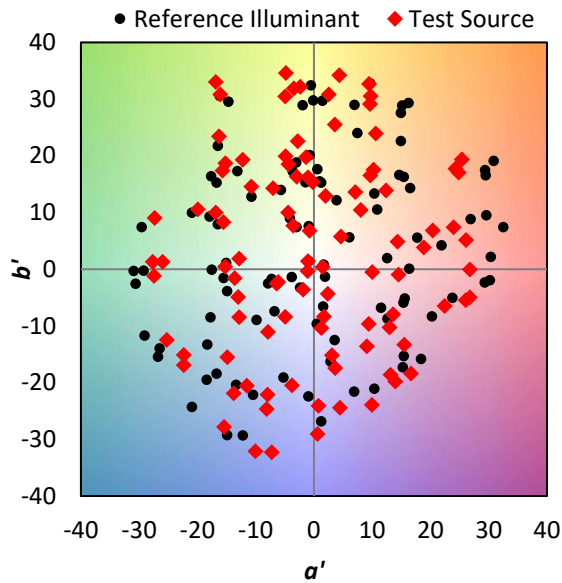


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 67	CES51 = 92	CES76 = 60
CES02 = 59	CES27 = 90	CES52 = 92	CES77 = 75
CES03 = 30	CES28 = 85	CES53 = 81	CES78 = 60
CES04 = 69	CES29 = 69	CES54 = 84	CES79 = 85
CES05 = 46	CES30 = 80	CES55 = 84	CES80 = 82
CES06 = 50	CES31 = 73	CES56 = 76	CES81 = 79
CES07 = 38	CES32 = 67	CES57 = 75	CES82 = 93
CES08 = 38	CES33 = 78	CES58 = 76	CES83 = 91
CES09 = 29	CES34 = 76	CES59 = 87	CES84 = 87
CES10 = 73	CES35 = 87	CES60 = 92	CES85 = 81
CES11 = 56	CES36 = 95	CES61 = 86	CES86 = 72
CES12 = 61	CES37 = 84	CES62 = 90	CES87 = 78
CES13 = 41	CES38 = 90	CES63 = 81	CES88 = 79
CES14 = 74	CES39 = 95	CES64 = 73	CES89 = 72
CES15 = 70	CES40 = 90	CES65 = 67	CES90 = 78
CES16 = 46	CES41 = 93	CES66 = 70	CES91 = 80
CES17 = 49	CES42 = 85	CES67 = 67	CES92 = 58
CES18 = 55	CES43 = 82	CES68 = 72	CES93 = 75
CES19 = 71	CES44 = 99	CES69 = 80	CES94 = 51
CES20 = 64	CES45 = 88	CES70 = 64	CES95 = 65
CES21 = 85	CES46 = 85	CES71 = 61	CES96 = 76
CES22 = 77	CES47 = 87	CES72 = 86	CES97 = 86
CES23 = 91	CES48 = 77	CES73 = 56	CES98 = 75
CES24 = 90	CES49 = 84	CES74 = 96	CES99 = 60
CES25 = 71	CES50 = 91	CES75 = 61	

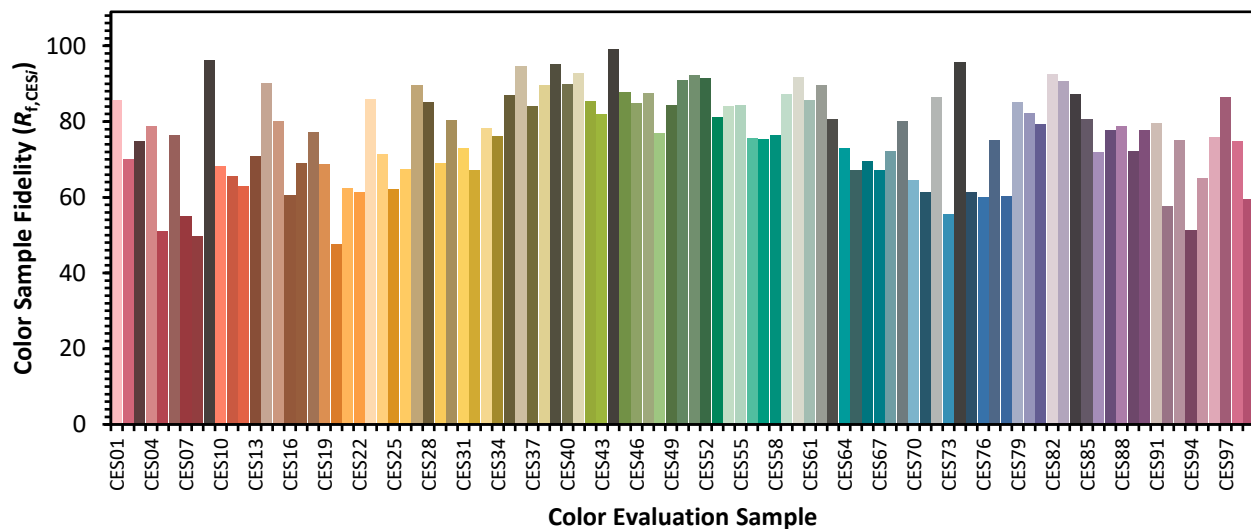

Color Rendition by Hue-Angle Bin

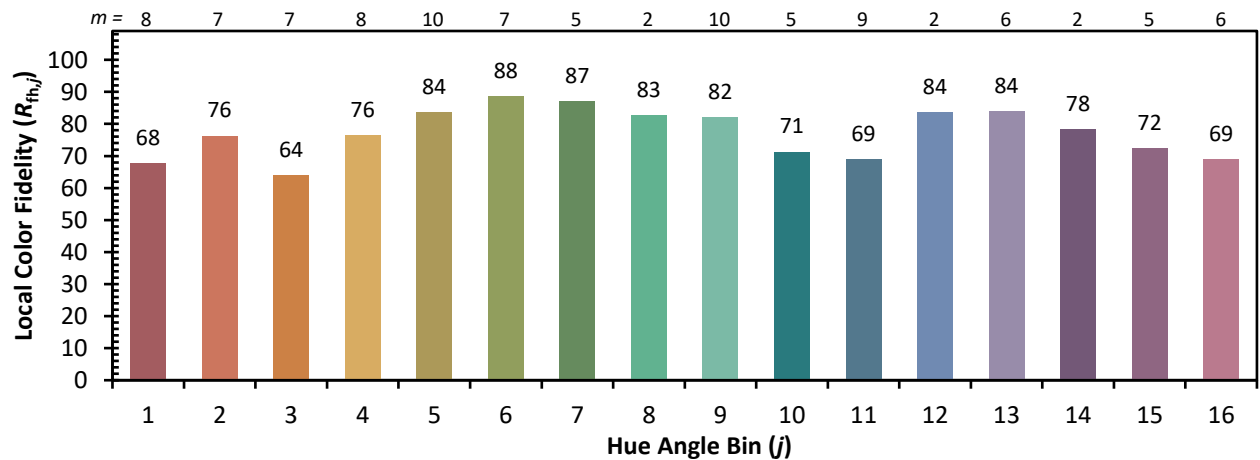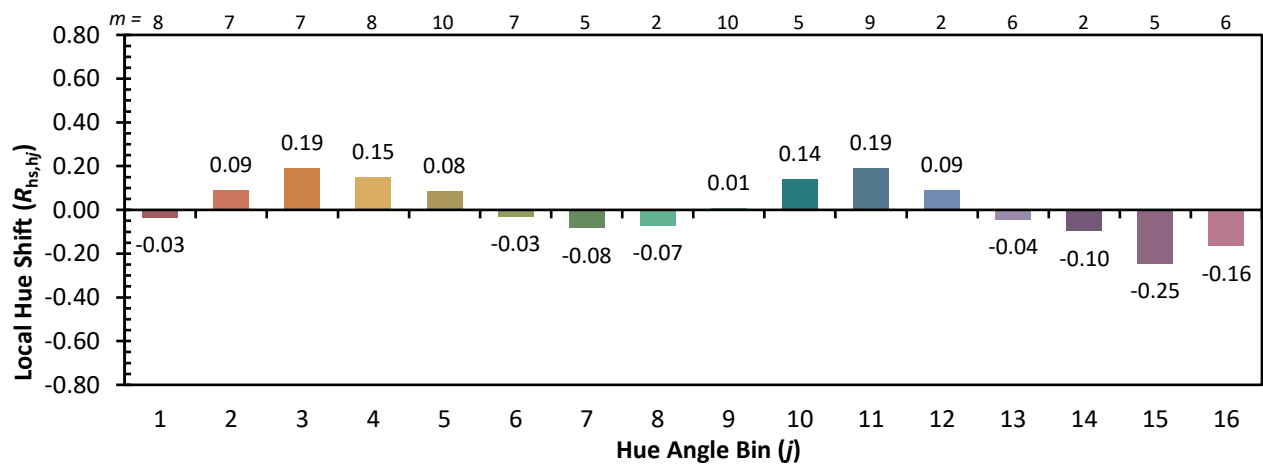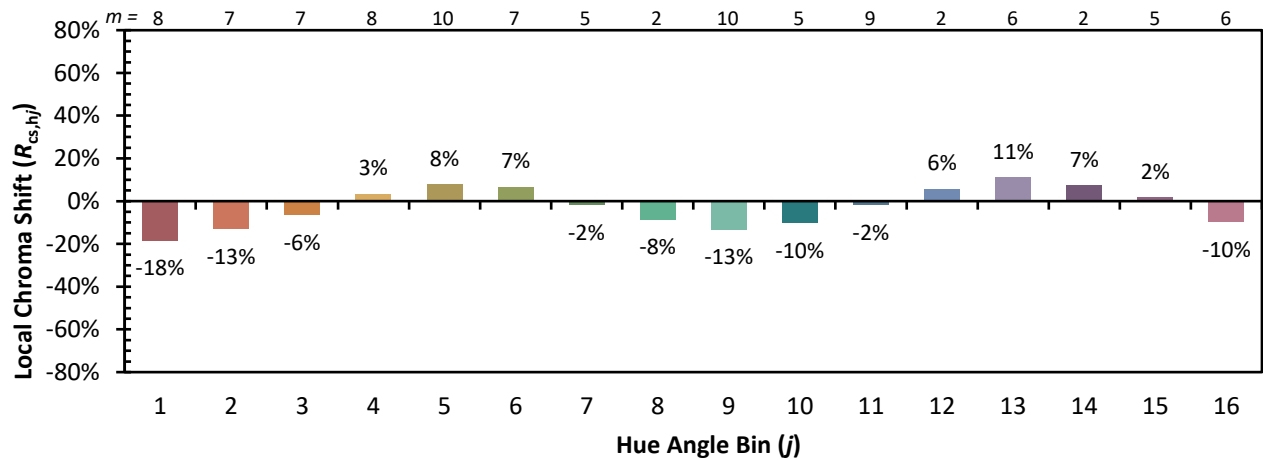

Measure Comparisons

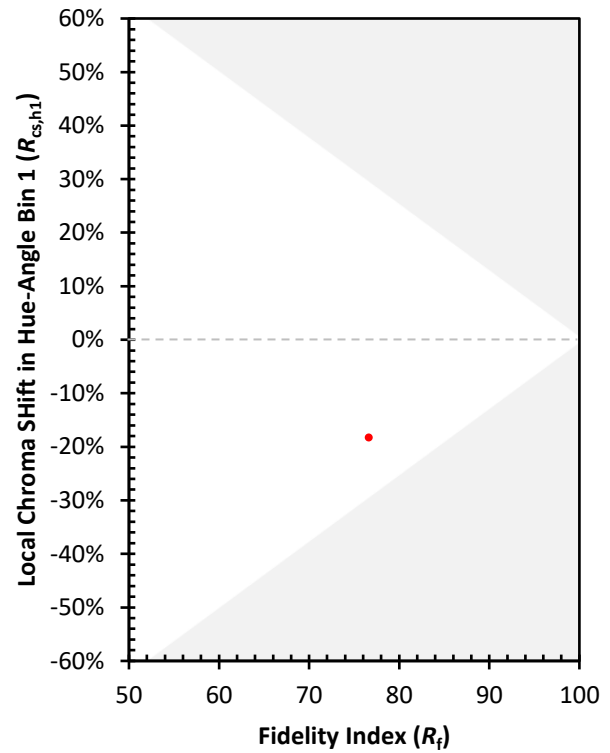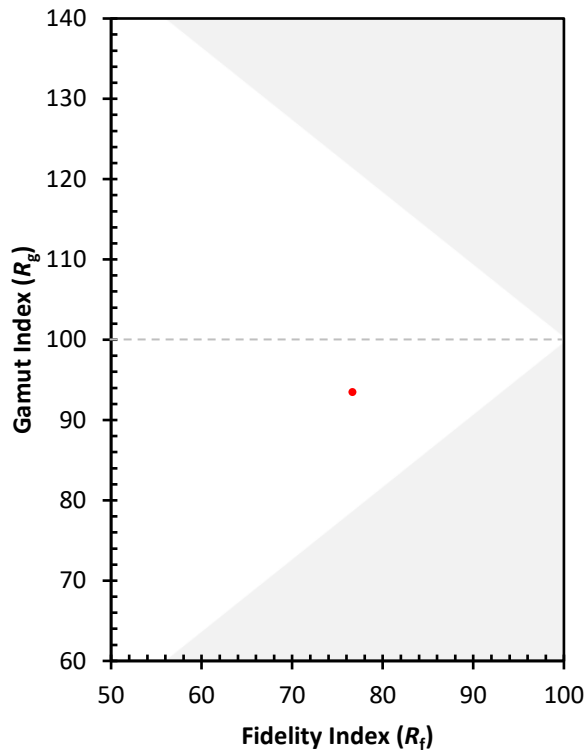

(END OF REPORT)