

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P980844

Luminaire Tested: **UFLD-L-CA4-370-750-U-66**

Issue Date: 04/10/2025

Test Information

Test Method: LM-79-08
Report Number: P980844
Test Lab: INNOVATION CENTER(G2)
Issue Date: 04/10/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: UFLD-L-CA4-370-750-U-66
Description: UTILITY FLOOD LARGE SIZE 370W 70CRI 5000K LED FIXTURE NEMA 6
Light Source: (4) 5000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 55525.8 lumens
Efficiency: N/A
Efficacy: 148.9 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.67' x H: 0')
IES Classification: Type I - Short
BUG Rating: B5 - U0 - G3


Input Watts (W): 372.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.99
Total Harmonic Distortion (THDi): 2.62%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P980844
 CATALOG NUMBER: UFLD-L-CA4-370-750-U-66

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

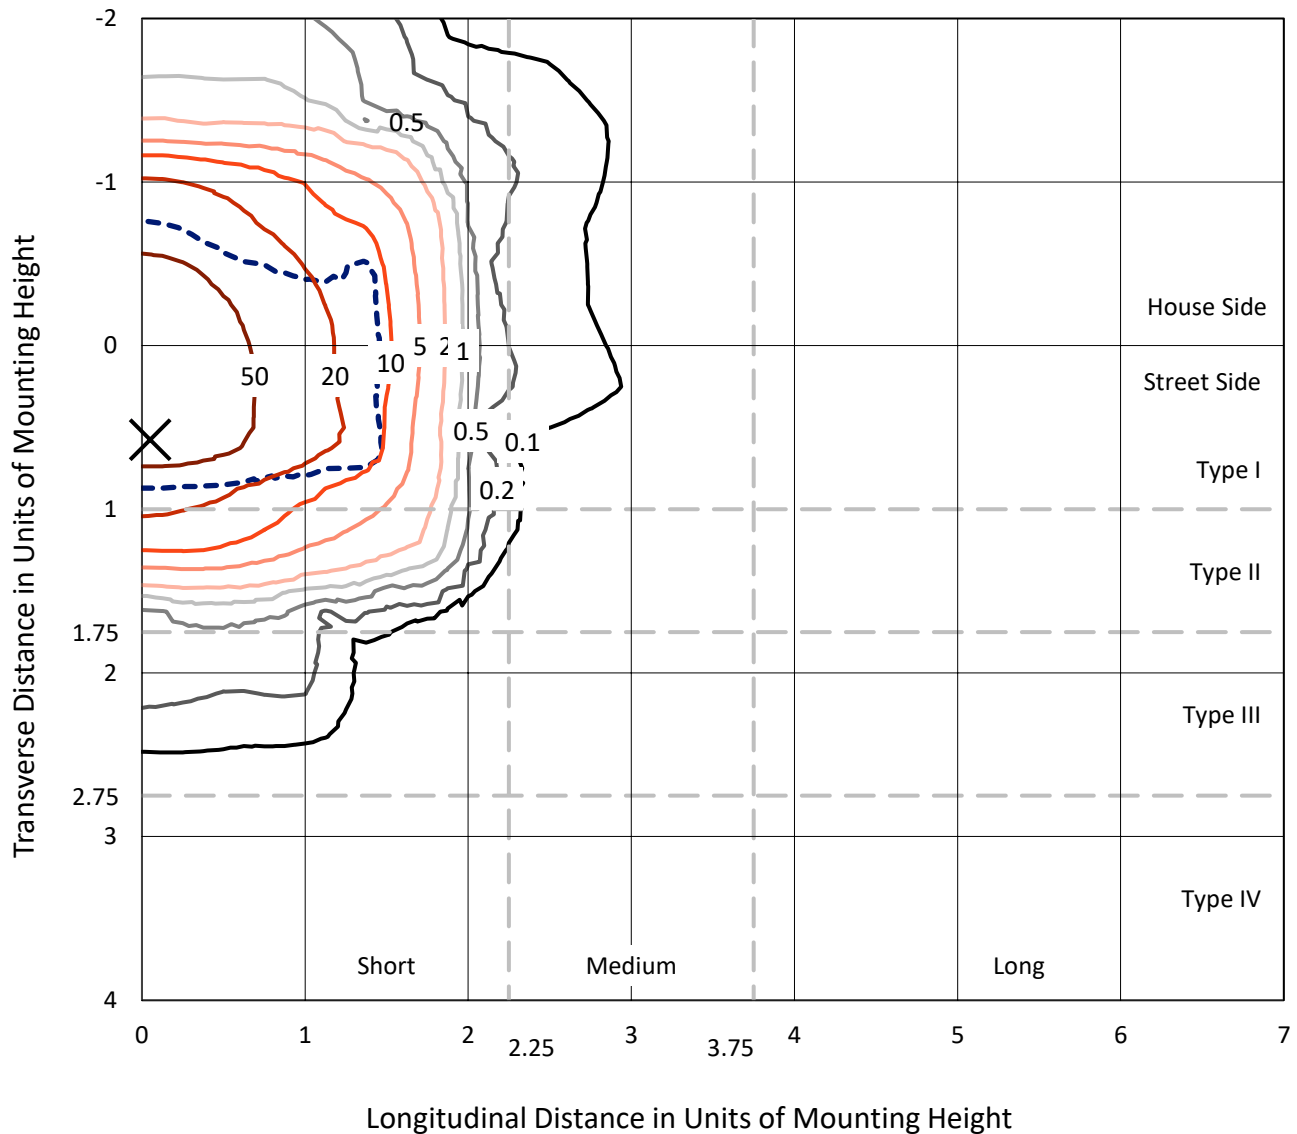

Based on 15 foot mounting height. Maximum calculated value = 103.2 fc
 Type I - Short - N/A

REPORT NUMBER: P980844
CATALOG NUMBER: UFLD-L-CA4-370-750-U-66

Luminous Intensity Polar Plot

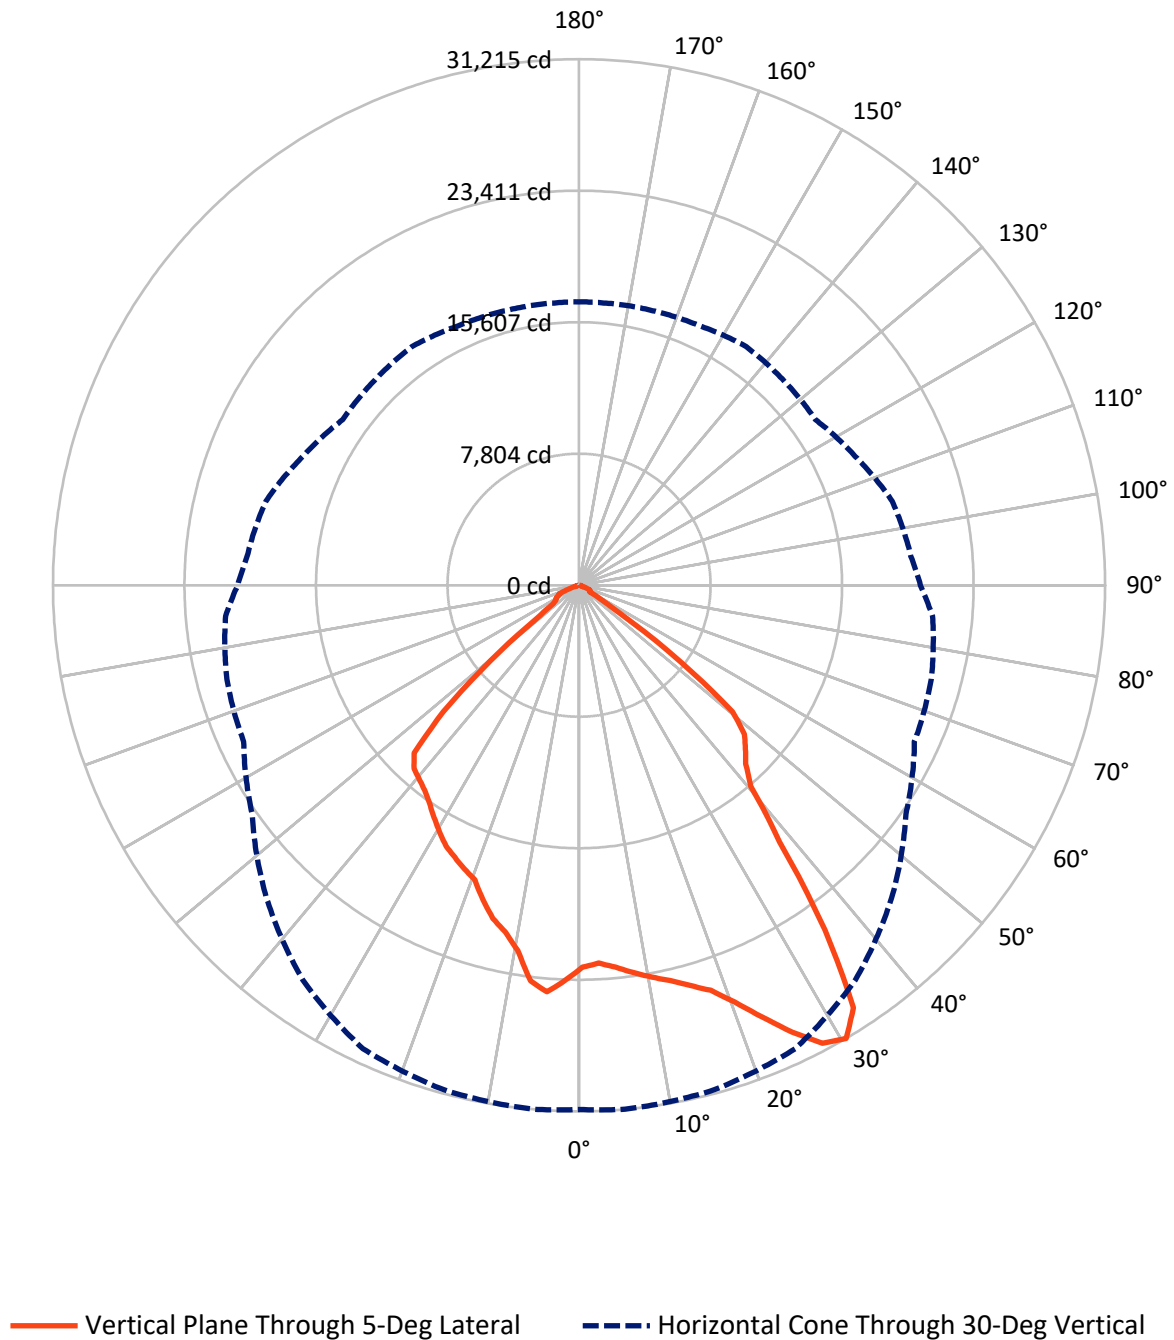

REPORT NUMBER: P980844

CATALOG NUMBER: UFLD-L-CA4-370-750-U-66

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	24558.5	0.0	24558.5
	% Fixture	44.2	0.0	44.2
Street Side	Lumens	30967.3	0.0	30967.3
	% Fixture	55.8	0.0	55.8
Total	Lumens	55525.8	0.0	55525.8
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2217.0	4.0
10°-20°	6422.4	11.6
20°-30°	10234.7	18.4
30°-40°	12795.0	23.0
40°-50°	12556.2	22.6
50°-60°	8976.9	16.2
60°-70°	1986.2	3.6
70°-80°	305.1	0.5
80°-90°	32.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	55525.8	100.0
0°-180°	55525.8	100.0

Coefficient of Utilization



REPORT NUMBER: P980844


CATALOG NUMBER: UFLD-L-CA4-370-750-U-66

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	10327.3	18.6			
FM	(30°-60°)	19567.3	35.2			
FH	(60°-80°)	1056.4	1.9			G1/1800
FVH	(80°-90°)	16.3	0.0			G1/100
BL	(0°-30°)	8546.8	15.4	B5		
BM	(30°-60°)	14760.9	26.6	B5		
BH	(60°-80°)	1234.8	2.2	B3/2500		G3/2500
BVH	(80°-90°)	16.0	0.0			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G3

Type I Short

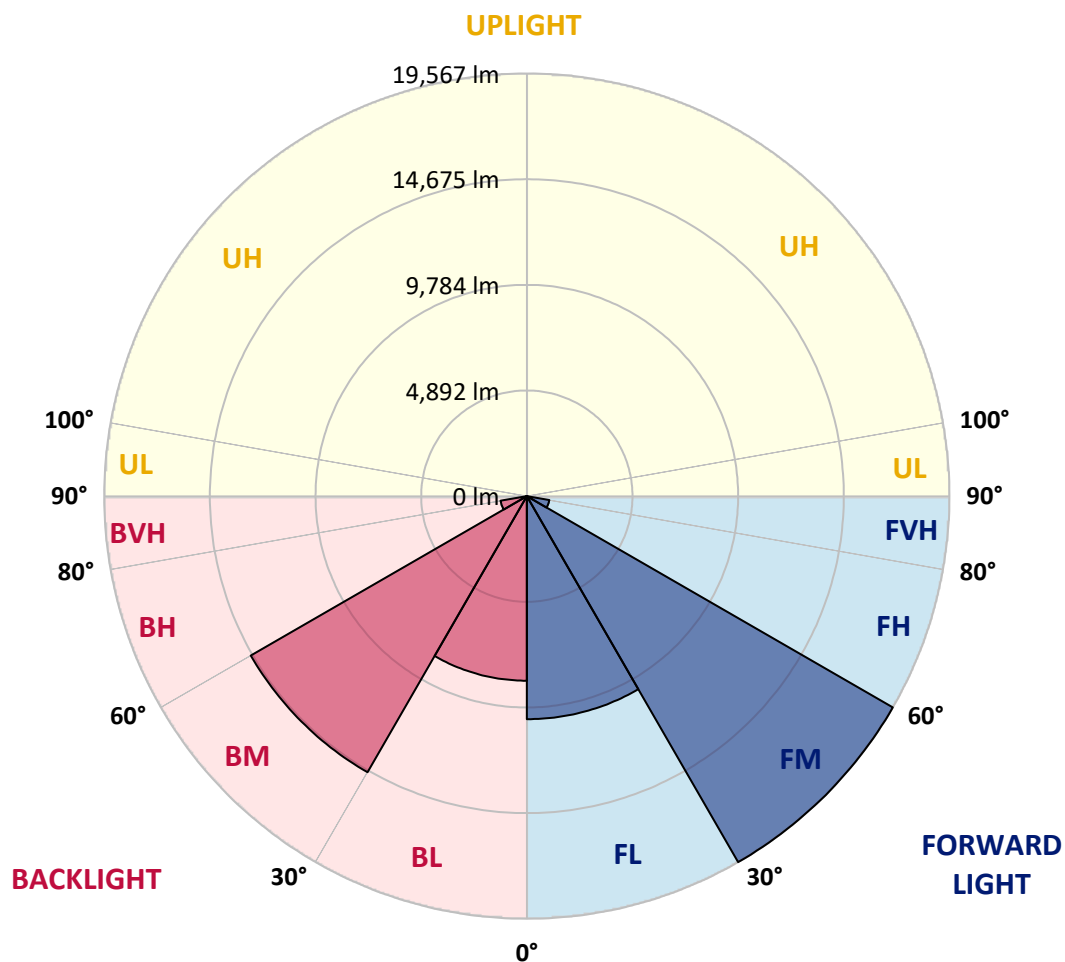



REPORT NUMBER: P980844

CATALOG NUMBER: UFLD-L-CA4-370-750-U-66

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7
2.5°	22410.1	22446.3	22482.5	22536.9	22609.4	22645.6	22609.4	22573.1	22555.0	22591.2	22609.4
5°	22718.1	22772.4	22790.5	22826.8	22863.0	22826.8	22808.6	22772.4	22754.3	22772.4	22826.8
7.5°	23171.0	23207.2	23189.1	23171.0	23152.9	23026.0	22899.2	22844.9	22844.9	22899.2	23044.2
10°	23569.5	23642.0	23551.4	23479.0	23352.1	23152.9	22935.5	22808.6	22844.9	22953.6	23134.7
12.5°	24076.8	24076.8	23986.2	23913.7	23623.9	23388.4	23098.5	22899.2	22899.2	23098.5	23297.8
15°	24692.8	24638.4	24602.2	24402.9	24058.7	23678.2	23315.9	23026.0	22971.7	23279.7	23406.5
17.5°	25471.8	25272.5	25181.9	24837.7	24366.7	23877.5	23388.4	23152.9	22989.8	23315.9	23171.0
20°	26540.6	26395.7	26105.8	25562.3	24602.2	23968.1	23388.4	23080.4	22953.6	23134.7	22989.8
22.5°	27917.5	27826.9	27174.7	26486.3	25218.1	24040.6	23297.8	22881.1	22844.9	22754.3	22446.3
25°	29602.3	29366.8	28696.5	27718.2	26142.1	24747.1	23279.7	22518.8	22392.0	22156.5	21613.0
27.5°	31033.5	30779.9	29964.7	29095.1	27410.2	25797.9	23424.6	22084.0	21939.1	21776.0	21105.7
30°	31106.0	31214.7	30997.3	30345.1	28587.8	26232.7	23678.2	21957.2	21631.1	21051.3	20254.2
32.5°	29638.6	29892.2	30417.6	30653.1	29475.5	26758.0	23895.6	22011.5	21413.7	20018.7	19366.5
35°	24620.3	25127.6	27283.4	29312.5	29729.1	27518.9	24076.8	22011.5	21341.2	19275.9	18768.7
37.5°	18913.6	19330.3	21160.0	24837.7	28605.9	27990.0	24475.4	21884.7	21250.6	19330.3	18641.9
40°	15453.4	15688.9	16486.0	18986.1	24656.5	27210.9	24873.9	22029.6	20978.9	19366.5	18714.3
42.5°	14511.3	14493.2	14330.1	15254.1	18804.9	24928.3	25145.7	22392.0	20526.0	19131.0	18587.5
45°	13877.2	13841.0	13696.1	13877.2	14873.6	20399.2	24946.4	23044.2	19964.4	18297.6	17935.3
47.5°	13188.8	13206.9	13152.6	13225.0	13043.9	15489.6	23823.2	23315.9	19004.2	16902.7	16775.9
50°	11540.2	11811.9	12536.6	12609.1	12138.0	12500.4	20399.2	23189.1	18315.8	16504.1	16395.4
52.5°	7174.1	7608.9	9746.7	11558.3	11286.6	11286.6	15562.1	23370.3	17083.8	16359.2	16431.6
55°	2536.3	2862.4	5217.5	7953.1	10109.0	10308.3	12301.1	20797.7	16938.9	16612.8	16685.3
57.5°	634.1	779.0	1594.2	3442.1	6811.8	9348.1	10996.7	17174.4	12862.7	12409.8	12591.0
60°	742.8	724.7	996.4	1105.1	2645.0	7391.5	9909.7	11594.5	8297.3	7772.0	7862.6
62.5°	797.1	742.8	779.0	978.3	434.8	3623.3	7898.8	6902.4	3424.0	2536.3	2681.2
65°	706.5	670.3	616.0	905.8	308.0	670.3	4655.9	2029.0	489.1	779.0	706.5
67.5°	471.0	489.1	507.3	724.7	289.9	289.9	616.0	507.3	344.2	706.5	616.0
70°	271.7	289.9	344.2	434.8	289.9	235.5	271.7	416.7	289.9	706.5	616.0
72.5°	163.0	163.0	163.0	181.2	289.9	199.3	181.2	344.2	253.6	652.2	616.0
75°	126.8	126.8	126.8	108.7	253.6	126.8	126.8	271.7	217.4	471.0	471.0
77.5°	108.7	108.7	108.7	90.6	144.9	108.7	108.7	199.3	199.3	235.5	271.7
80°	72.5	72.5	72.5	72.5	90.6	90.6	72.5	108.7	90.6	108.7	126.8
82.5°	36.2	54.3	54.3	36.2	54.3	54.3	54.3	72.5	54.3	72.5	72.5
85°	18.1	18.1	18.1	18.1	18.1	18.1	18.1	36.2	18.1	18.1	36.2
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P980844

CATALOG NUMBER: UFLD-L-CA4-370-750-U-66

CANDELA DISTRIBUTION (continued):

	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7	22663.7
2.5°	22645.6	22736.2	22863.0	23062.3	23134.7	23261.6	23370.3	23460.8	23460.8	23424.6
5°	22935.5	23189.1	23533.3	23841.3	23950.0	24076.8	24131.1	24221.7	24203.6	24185.5
7.5°	23189.1	23587.7	23950.0	24167.4	24131.1	23968.1	23859.4	23714.5	23660.1	23696.4
10°	23388.4	23750.7	23913.7	23768.8	23334.0	22953.6	22464.4	22138.3	21975.3	22029.6
12.5°	23460.8	23587.7	23442.7	22645.6	22102.1	21739.8	21341.2	21123.8	21033.2	21051.3
15°	23479.0	23189.1	22392.0	21794.1	21395.6	20942.6	20616.6	20417.3	20417.3	20435.4
17.5°	23098.5	22392.0	21703.5	21250.6	20689.0	20218.0	20036.8	19964.4	19511.4	19583.9
20°	22754.3	21739.8	21359.3	20652.8	19982.5	19674.5	18623.7	18515.0	18533.2	18551.3
22.5°	22029.6	21268.7	20924.5	20000.6	19239.7	18388.2	18243.3	18134.6	18152.7	18152.7
25°	21033.2	20598.4	20127.4	19167.2	18243.3	18080.2	17971.5	17826.6	17754.1	17772.3
27.5°	20471.6	19928.1	19058.5	18243.3	17645.4	17717.9	17591.1	17373.7	17373.7	17391.8
30°	19765.1	19239.7	18080.2	17120.1	17174.4	17283.1	16975.1	16866.4	16812.1	16812.1
32.5°	18895.5	18170.8	17156.3	16250.5	16576.6	16540.3	16159.9	16196.1	16232.4	16196.1
35°	18243.3	17301.2	16449.8	15960.6	15833.8	15688.9	15489.6	15616.4	15670.8	15634.5
37.5°	18080.2	16957.0	16069.3	15725.1	15236.0	14964.2	15018.6	15145.4	15217.8	15199.7
40°	18025.9	16612.8	15743.2	15380.9	14728.7	14493.2	14565.6	14819.3	14909.9	14891.7
42.5°	17953.4	16377.3	15543.9	15109.1	14203.3	14040.3	14384.5	14620.0	14638.1	14620.0
45°	17573.0	16123.7	15417.1	14547.5	13406.2	13605.5	14040.3	14167.1	13949.7	13859.1
47.5°	16685.3	15652.6	15036.7	13859.1	12754.0	13134.4	13188.8	11811.9	11014.8	10833.7
50°	16431.6	15670.8	14601.9	13043.9	12355.4	12735.9	10362.6	7916.9	6920.5	6721.2
52.5°	16359.2	15489.6	14764.9	12192.4	12210.5	10743.1	6540.0	3876.9	3116.0	2971.1
55°	16540.3	16286.7	15036.7	11685.1	11359.0	6993.0	3043.6	1829.8	1884.1	1829.8
57.5°	12482.3	13623.6	15362.8	10888.0	8297.3	3369.7	1920.3	1775.4	1648.6	1612.4
60°	7790.1	8877.1	11250.3	9366.2	4257.4	2010.9	1956.6	1648.6	1594.2	1576.1
62.5°	2572.5	3949.4	6449.5	6159.6	1177.6	1992.8	1974.7	1467.4	1467.4	1467.4
65°	652.2	670.3	1775.4	2119.6	869.6	1775.4	1884.1	1376.9	1340.6	1395.0
67.5°	561.6	507.3	942.1	833.4	724.7	1231.9	1648.6	1322.5	1250.0	1250.0
70°	561.6	597.8	923.9	779.0	452.9	670.3	1195.7	815.2	724.7	670.3
72.5°	525.4	579.7	815.2	706.5	308.0	326.1	525.4	271.7	253.6	217.4
75°	452.9	471.0	634.1	634.1	326.1	163.0	217.4	181.2	181.2	163.0
77.5°	308.0	235.5	362.3	452.9	235.5	108.7	90.6	90.6	90.6	72.5
80°	163.0	90.6	90.6	72.5	90.6	90.6	54.3	72.5	72.5	54.3
82.5°	90.6	54.3	54.3	36.2	36.2	54.3	36.2	36.2	36.2	36.2
85°	36.2	36.2	18.1	18.1	18.1	36.2	18.1	18.1	18.1	18.1
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	18.1	18.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Lumark

Report Number: SP1-2501-319-11

Test Date: 02/05/2025

Luminaire Tested: NFFLD-C55-7050-66

Data in this report applies to families of products including NFFLD-C55-7050-66


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2501-319-11
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 02/06/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Lumark
 Catalog Number: **NFFLD-C55-7050-66**
 Description: LUMARK NIGHT FALCON 16900LM NEMA 6

Spectral Parameters

CCT (K): 5108
 CIE u' : 0.2083
 CIE v' : 0.4860
 Duv: 0.0028
 CIE x: 0.3426
 CIE y: 0.3552
 CIE z: 0.3022
 Peak Wavelength (nm): 449
 Dominant Wavelength (nm): 568
 Purity: 9.36717
 R_f: 77.8
 R_g: 93.2

CRI (Ra): 75.3
 R1: 71.3
 R2: 82.0
 R3: 90.0
 R4: 74.3
 R5: 73.5
 R6: 75.6
 R7: 81.5
 R8: 54.1
 R9: -33.6
 R10: 58.1
 R11: 71.9
 R12: 56.4
 R13: 73.5
 R14: 94.6
 R15: 63.4

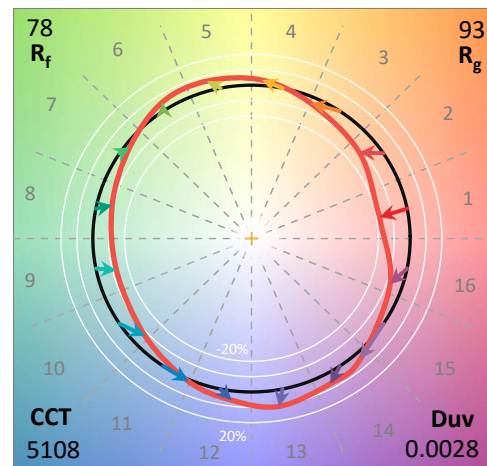

Test Conditions


Stabilization Time: 48M
 Operation Time: 1H 48M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2501-319-11


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	12/16/2024	6/16/2025
Power Meter	INXT2011004	1/21/2025	1/21/2026
AC Power Source	IN0063	10/22/2024	10/22/2025
DC Power Source	IN0208	10/22/2024	10/22/2025
Sphere Thermometer	IN0085	10/22/2024	10/22/2025
Room Thermometer	IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2501-319-11

CIE 1931 Chromaticity Diagram

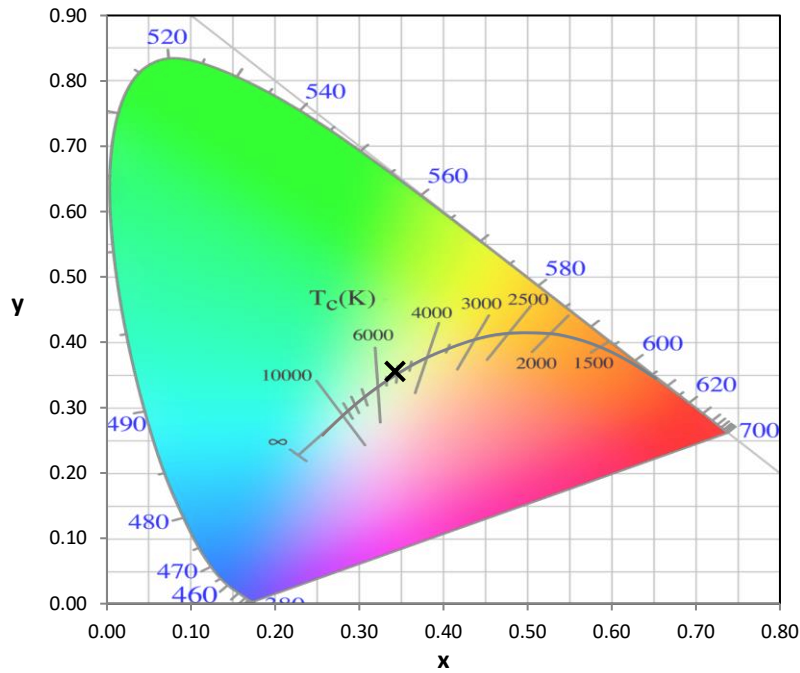


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

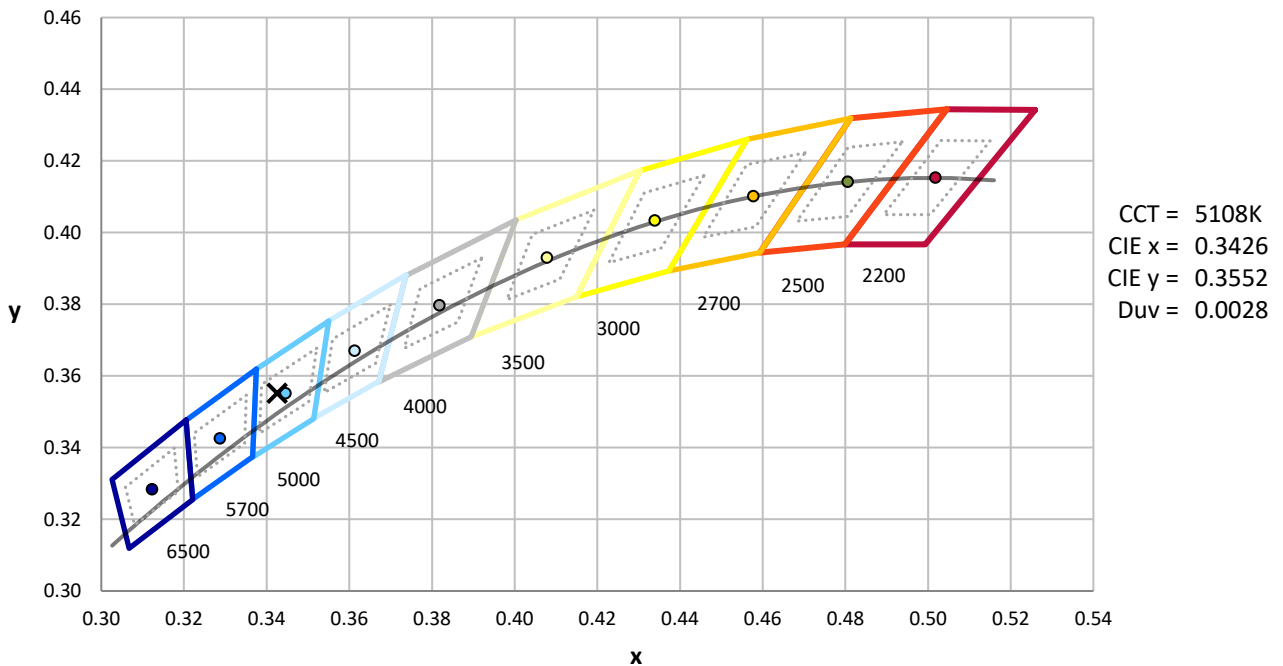

CCT = 5108K
 CIE x = 0.3426
 CIE y = 0.3552
 Duv = 0.0028

REPORT NUMBER: SP1-2501-319-11

Photopic Flux vs. Wavelength

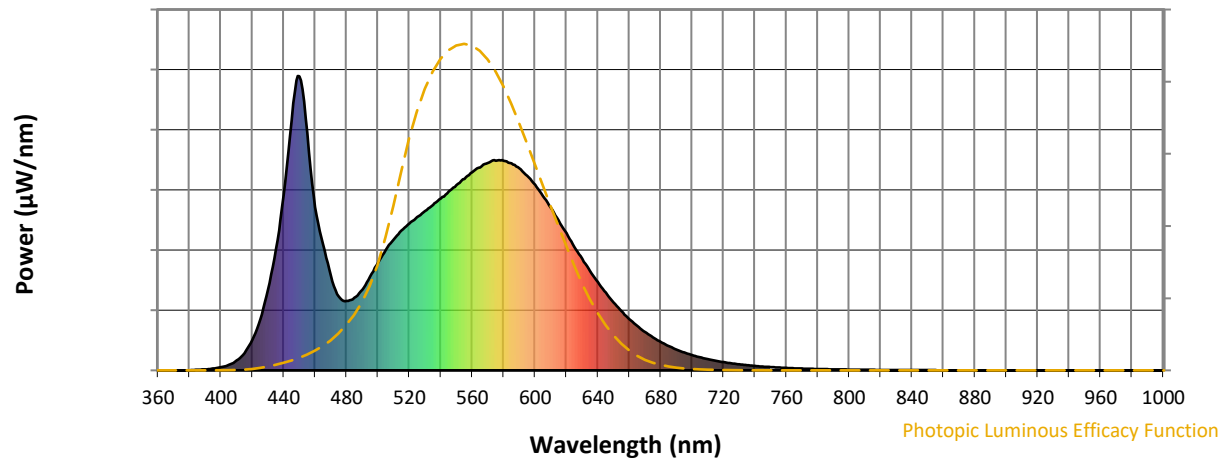


Photopic Lumens: NR

λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	274	NR	620	466	NR	750	11	NR	880	0	NR
365	0	NR	495	319	NR	625	420	NR	755	10	NR	885	0	NR
370	0	NR	500	366	NR	630	380	NR	760	8	NR	890	0	NR
375	0	NR	505	409	NR	635	338	NR	765	7	NR	895	0	NR
380	0	NR	510	445	NR	640	300	NR	770	6	NR	900	0	NR
385	2	NR	515	475	NR	645	264	NR	775	5	NR	905	0	NR
390	4	NR	520	499	NR	650	230	NR	780	5	NR	910	0	NR
395	6	NR	525	520	NR	655	201	NR	785	4	NR	915	0	NR
400	10	NR	530	542	NR	660	174	NR	790	3	NR	920	0	NR
405	18	NR	535	562	NR	665	151	NR	795	3	NR	925	0	NR
410	33	NR	540	584	NR	670	131	NR	800	3	NR	930	0	NR
415	59	NR	545	607	NR	675	112	NR	805	2	NR	935	0	NR
420	103	NR	550	629	NR	680	97	NR	810	2	NR	940	0	NR
425	173	NR	555	650	NR	685	83	NR	815	2	NR	945	0	NR
430	274	NR	560	673	NR	690	71	NR	820	2	NR	950	0	NR
435	412	NR	565	690	NR	695	61	NR	825	1	NR	955	0	NR
440	595	NR	570	705	NR	700	52	NR	830	1	NR	960	0	NR
445	849	NR	575	712	NR	705	44	NR	835	1	NR	965	0	NR
450	999	NR	580	713	NR	710	38	NR	840	1	NR	970	0	NR
455	805	NR	585	703	NR	715	33	NR	845	1	NR	975	0	NR
460	555	NR	590	686	NR	720	28	NR	850	1	NR	980	0	NR
465	428	NR	595	661	NR	725	24	NR	855	1	NR	985	0	NR
470	319	NR	600	630	NR	730	20	NR	860	1	NR	990	0	NR
475	251	NR	605	593	NR	735	18	NR	865	1	NR	995	0	NR
480	236	NR	610	552	NR	740	15	NR	870	0	NR	1000	0	NR
485	247	NR	615	510	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-11

Scotopic Flux vs. Wavelength

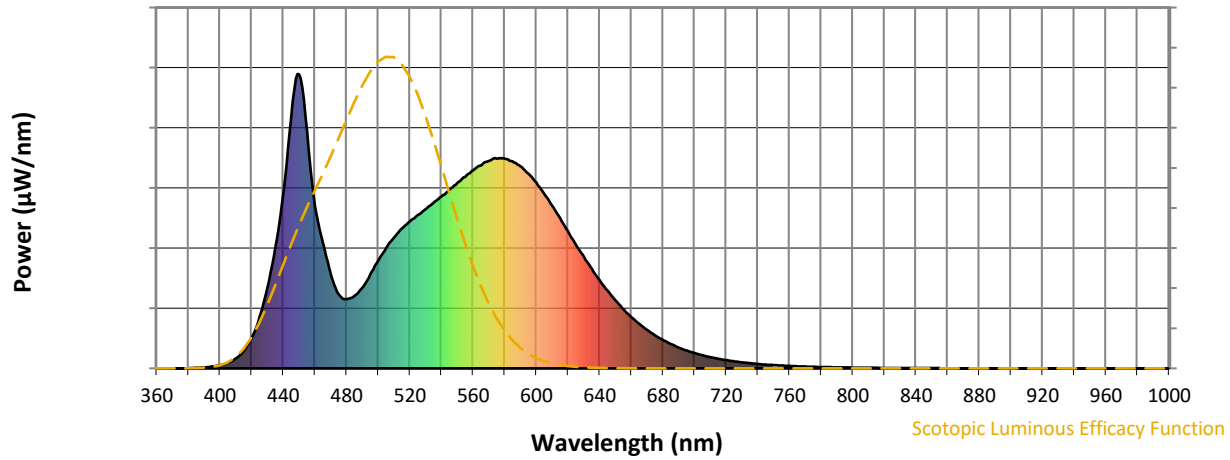


Scotopic Lumens: NR

S/P: 1.89

λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	274	NR	620	466	NR	750	11	NR	880	0	NR
365	0	NR	495	319	NR	625	420	NR	755	10	NR	885	0	NR
370	0	NR	500	366	NR	630	380	NR	760	8	NR	890	0	NR
375	0	NR	505	409	NR	635	338	NR	765	7	NR	895	0	NR
380	0	NR	510	445	NR	640	300	NR	770	6	NR	900	0	NR
385	2	NR	515	475	NR	645	264	NR	775	5	NR	905	0	NR
390	4	NR	520	499	NR	650	230	NR	780	5	NR	910	0	NR
395	6	NR	525	520	NR	655	201	NR	785	4	NR	915	0	NR
400	10	NR	530	542	NR	660	174	NR	790	3	NR	920	0	NR
405	18	NR	535	562	NR	665	151	NR	795	3	NR	925	0	NR
410	33	NR	540	584	NR	670	131	NR	800	3	NR	930	0	NR
415	59	NR	545	607	NR	675	112	NR	805	2	NR	935	0	NR
420	103	NR	550	629	NR	680	97	NR	810	2	NR	940	0	NR
425	173	NR	555	650	NR	685	83	NR	815	2	NR	945	0	NR
430	274	NR	560	673	NR	690	71	NR	820	2	NR	950	0	NR
435	412	NR	565	690	NR	695	61	NR	825	1	NR	955	0	NR
440	595	NR	570	705	NR	700	52	NR	830	1	NR	960	0	NR
445	849	NR	575	712	NR	705	44	NR	835	1	NR	965	0	NR
450	999	NR	580	713	NR	710	38	NR	840	1	NR	970	0	NR
455	805	NR	585	703	NR	715	33	NR	845	1	NR	975	0	NR
460	555	NR	590	686	NR	720	28	NR	850	1	NR	980	0	NR
465	428	NR	595	661	NR	725	24	NR	855	1	NR	985	0	NR
470	319	NR	600	630	NR	730	20	NR	860	1	NR	990	0	NR
475	251	NR	605	593	NR	735	18	NR	865	1	NR	995	0	NR
480	236	NR	610	552	NR	740	15	NR	870	0	NR	1000	0	NR
485	247	NR	615	510	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-11

Melanopic Flux vs. Wavelength

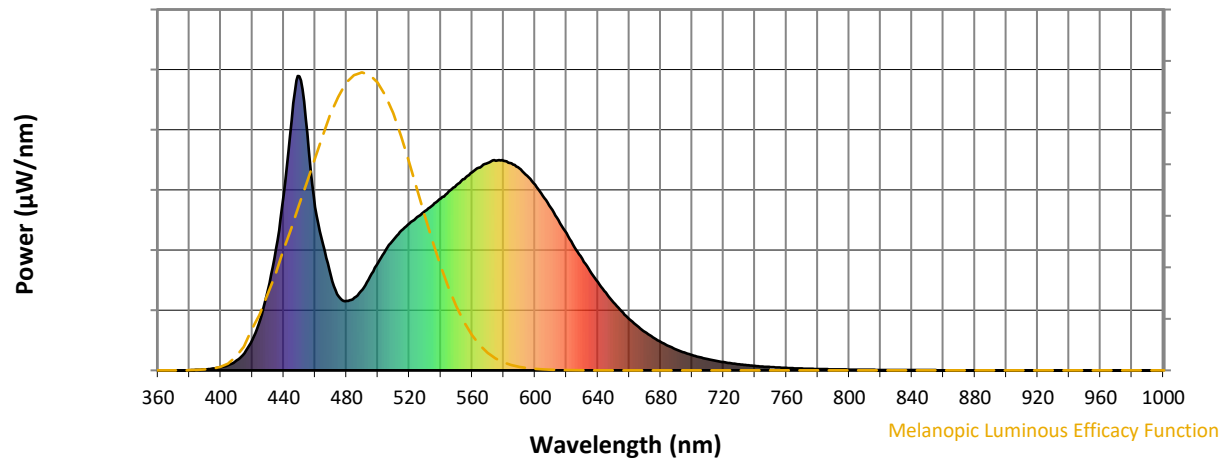

Melanopic Lumens: NR

M/P: 3.96


λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	274	NR	620	466	NR	750	11	NR	880	0	NR
365	0	NR	495	319	NR	625	420	NR	755	10	NR	885	0	NR
370	0	NR	500	366	NR	630	380	NR	760	8	NR	890	0	NR
375	0	NR	505	409	NR	635	338	NR	765	7	NR	895	0	NR
380	0	NR	510	445	NR	640	300	NR	770	6	NR	900	0	NR
385	2	NR	515	475	NR	645	264	NR	775	5	NR	905	0	NR
390	4	NR	520	499	NR	650	230	NR	780	5	NR	910	0	NR
395	6	NR	525	520	NR	655	201	NR	785	4	NR	915	0	NR
400	10	NR	530	542	NR	660	174	NR	790	3	NR	920	0	NR
405	18	NR	535	562	NR	665	151	NR	795	3	NR	925	0	NR
410	33	NR	540	584	NR	670	131	NR	800	3	NR	930	0	NR
415	59	NR	545	607	NR	675	112	NR	805	2	NR	935	0	NR
420	103	NR	550	629	NR	680	97	NR	810	2	NR	940	0	NR
425	173	NR	555	650	NR	685	83	NR	815	2	NR	945	0	NR
430	274	NR	560	673	NR	690	71	NR	820	2	NR	950	0	NR
435	412	NR	565	690	NR	695	61	NR	825	1	NR	955	0	NR
440	595	NR	570	705	NR	700	52	NR	830	1	NR	960	0	NR
445	849	NR	575	712	NR	705	44	NR	835	1	NR	965	0	NR
450	999	NR	580	713	NR	710	38	NR	840	1	NR	970	0	NR
455	805	NR	585	703	NR	715	33	NR	845	1	NR	975	0	NR
460	555	NR	590	686	NR	720	28	NR	850	1	NR	980	0	NR
465	428	NR	595	661	NR	725	24	NR	855	1	NR	985	0	NR
470	319	NR	600	630	NR	730	20	NR	860	1	NR	990	0	NR
475	251	NR	605	593	NR	735	18	NR	865	1	NR	995	0	NR
480	236	NR	610	552	NR	740	15	NR	870	0	NR	1000	0	NR
485	247	NR	615	510	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-11





TM-30-18

Summary

$R_f = 77.8$
 $R_g = 93.2$
 $\text{CIE } R_a = 75.3$
 $R_g = -33.6$

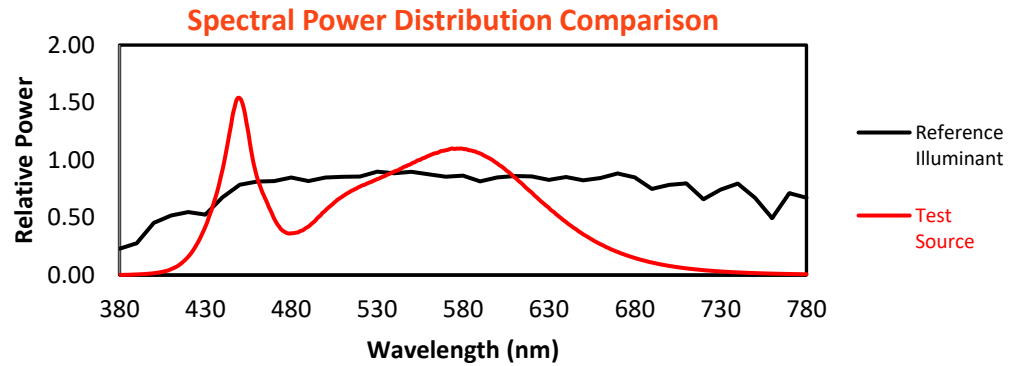


Color Vector Graphics

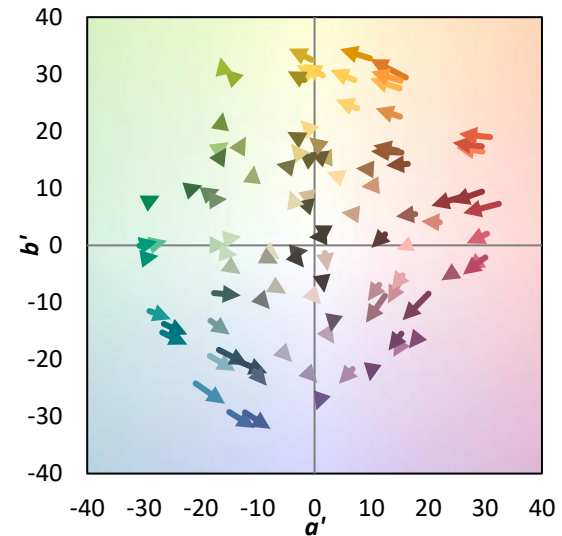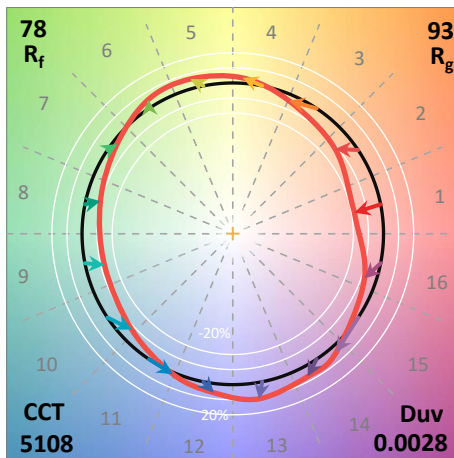
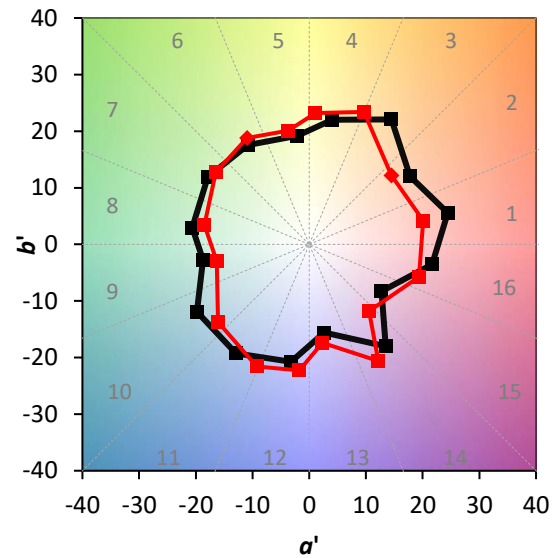
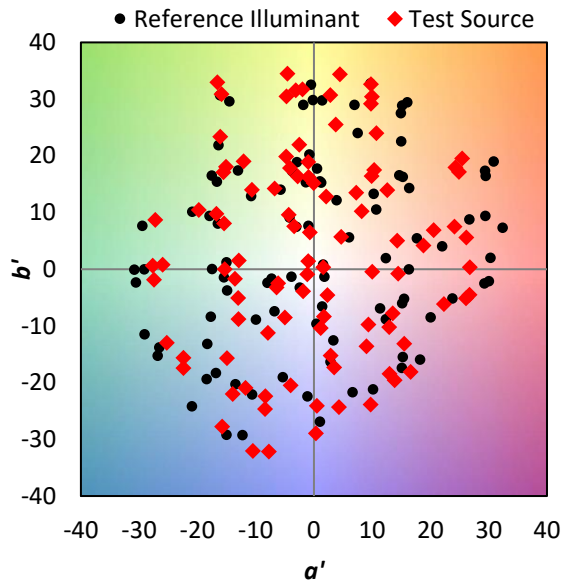


Individual Sample Fidelity Index ($R_{f,i}$)


CES01 = 85	CES26 = 69	CES51 = 92	CES76 = 62
CES02 = 60	CES27 = 91	CES52 = 91	CES77 = 75
CES03 = 30	CES28 = 86	CES53 = 83	CES78 = 63
CES04 = 69	CES29 = 73	CES54 = 86	CES79 = 85
CES05 = 46	CES30 = 87	CES55 = 85	CES80 = 83
CES06 = 50	CES31 = 76	CES56 = 78	CES81 = 80
CES07 = 39	CES32 = 69	CES57 = 78	CES82 = 93
CES08 = 38	CES33 = 83	CES58 = 78	CES83 = 92
CES09 = 29	CES34 = 77	CES59 = 87	CES84 = 88
CES10 = 73	CES35 = 87	CES60 = 91	CES85 = 81
CES11 = 56	CES36 = 92	CES61 = 85	CES86 = 74
CES12 = 61	CES37 = 84	CES62 = 88	CES87 = 79
CES13 = 41	CES38 = 95	CES63 = 81	CES88 = 81
CES14 = 74	CES39 = 97	CES64 = 72	CES89 = 74
CES15 = 70	CES40 = 92	CES65 = 68	CES90 = 81
CES16 = 46	CES41 = 96	CES66 = 68	CES91 = 78
CES17 = 49	CES42 = 87	CES67 = 65	CES92 = 59
CES18 = 55	CES43 = 84	CES68 = 71	CES93 = 76
CES19 = 71	CES44 = 99	CES69 = 78	CES94 = 54
CES20 = 64	CES45 = 89	CES70 = 65	CES95 = 67
CES21 = 85	CES46 = 87	CES71 = 61	CES96 = 78
CES22 = 77	CES47 = 91	CES72 = 86	CES97 = 88
CES23 = 91	CES48 = 80	CES73 = 57	CES98 = 78
CES24 = 90	CES49 = 86	CES74 = 94	CES99 = 63
CES25 = 71	CES50 = 91	CES75 = 62	

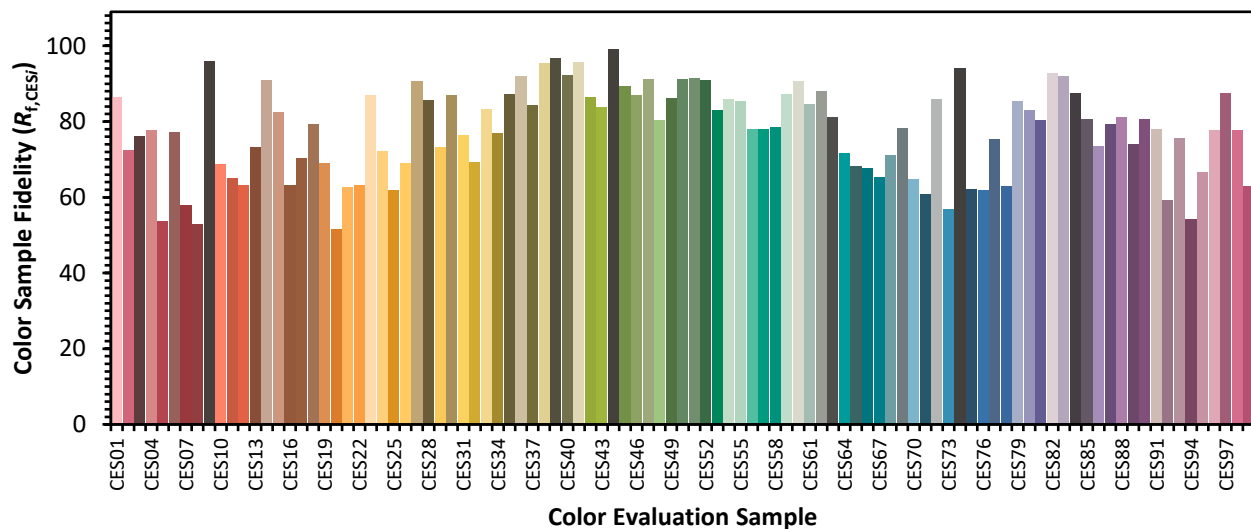

Color Rendition by Hue-Angle Bin

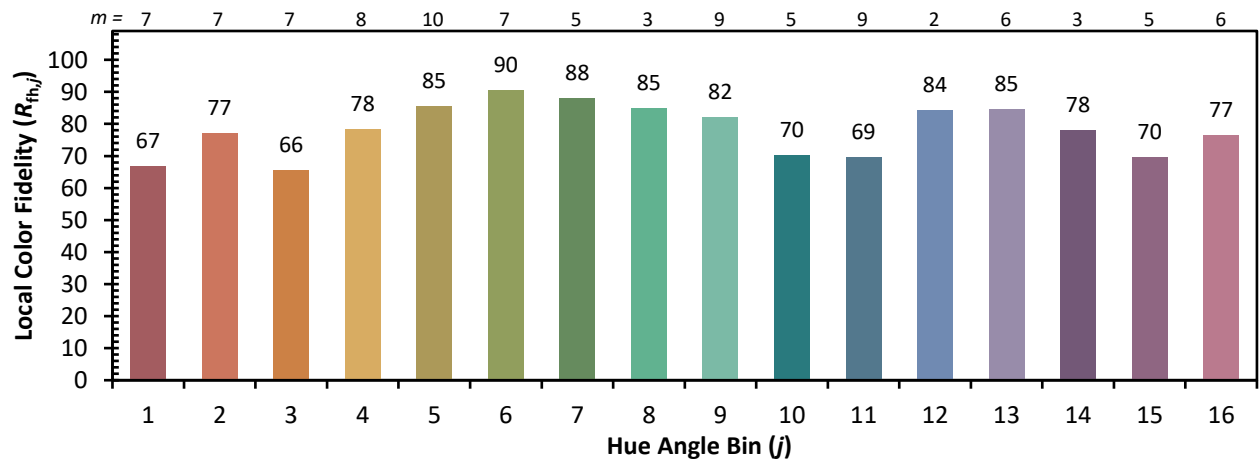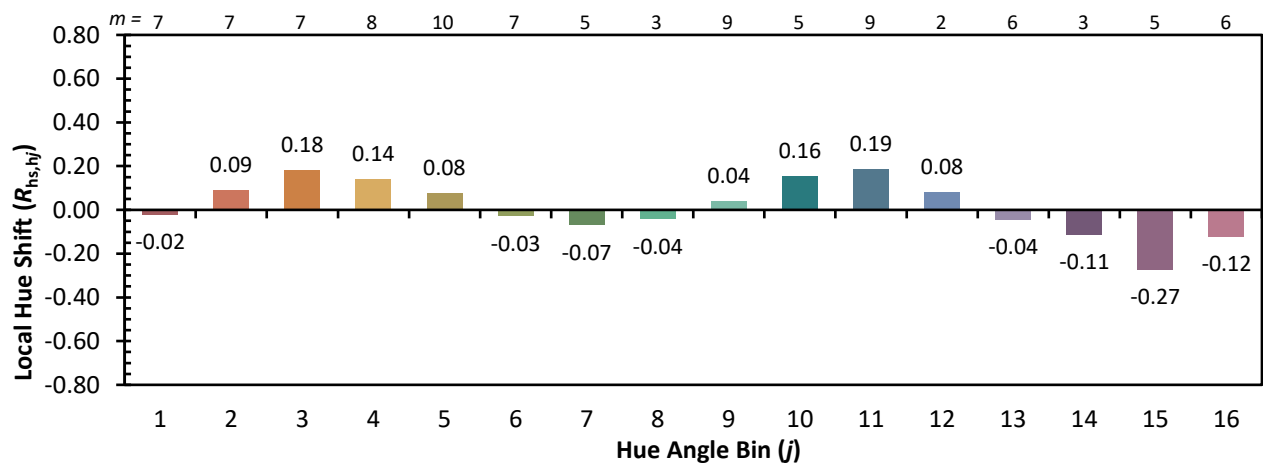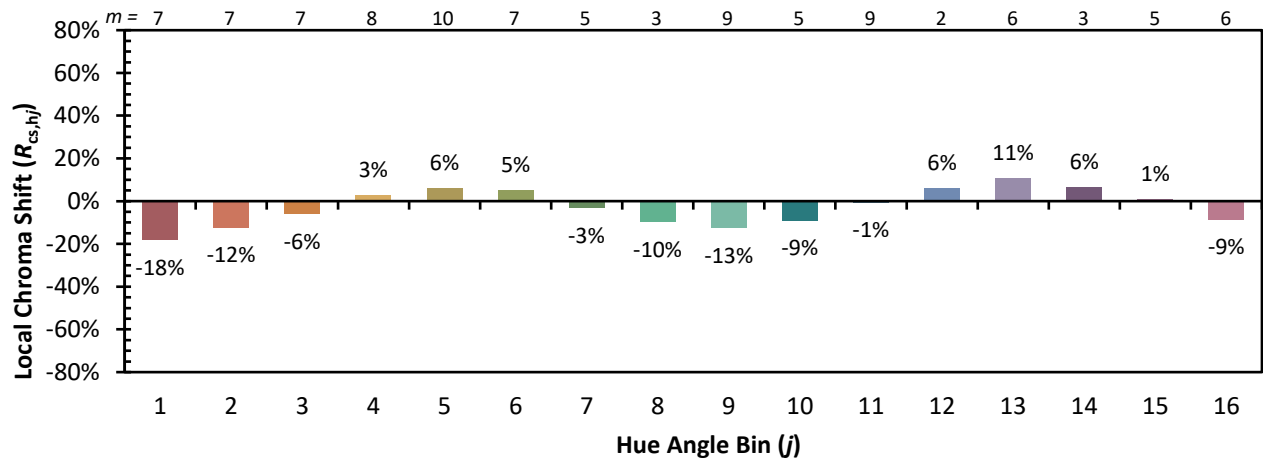

Measure Comparisons

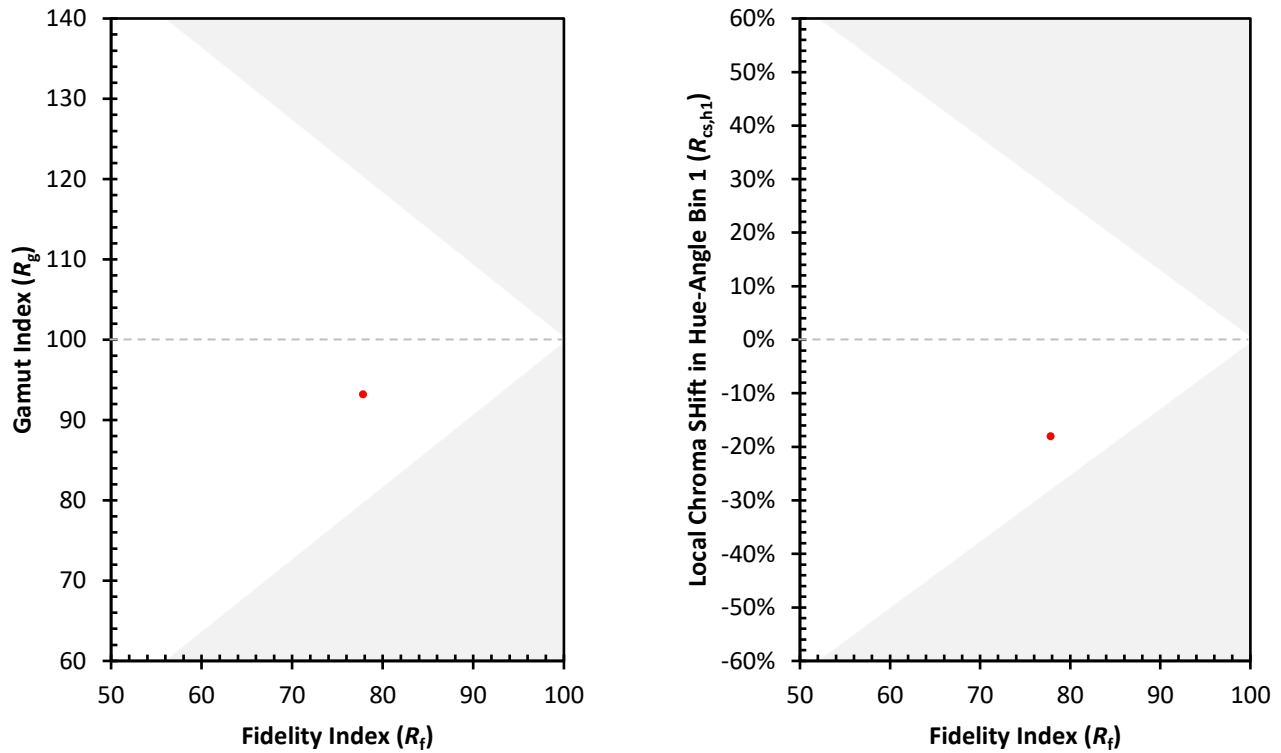

(END OF REPORT)