

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1066457

Luminaire Tested: **NVN-SA2A-722-U-RBC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1066457
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: NVN-SA2A-722-U-RBC
Description: Navion AREA AND ROADWAY LUMINAIRE 615mA 2xLight Square PACKAGE
70CRI 2200K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL
Light Source: (28) 2200K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4571.9 lumens
Efficiency: N/A
Efficacy: 82.7 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 1' x H: 0')
IES Classification: Type III - Short
BUG Rating: B0 - U0 - G1

Input Watts (W): 55.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 - - - 1/2 Max cd

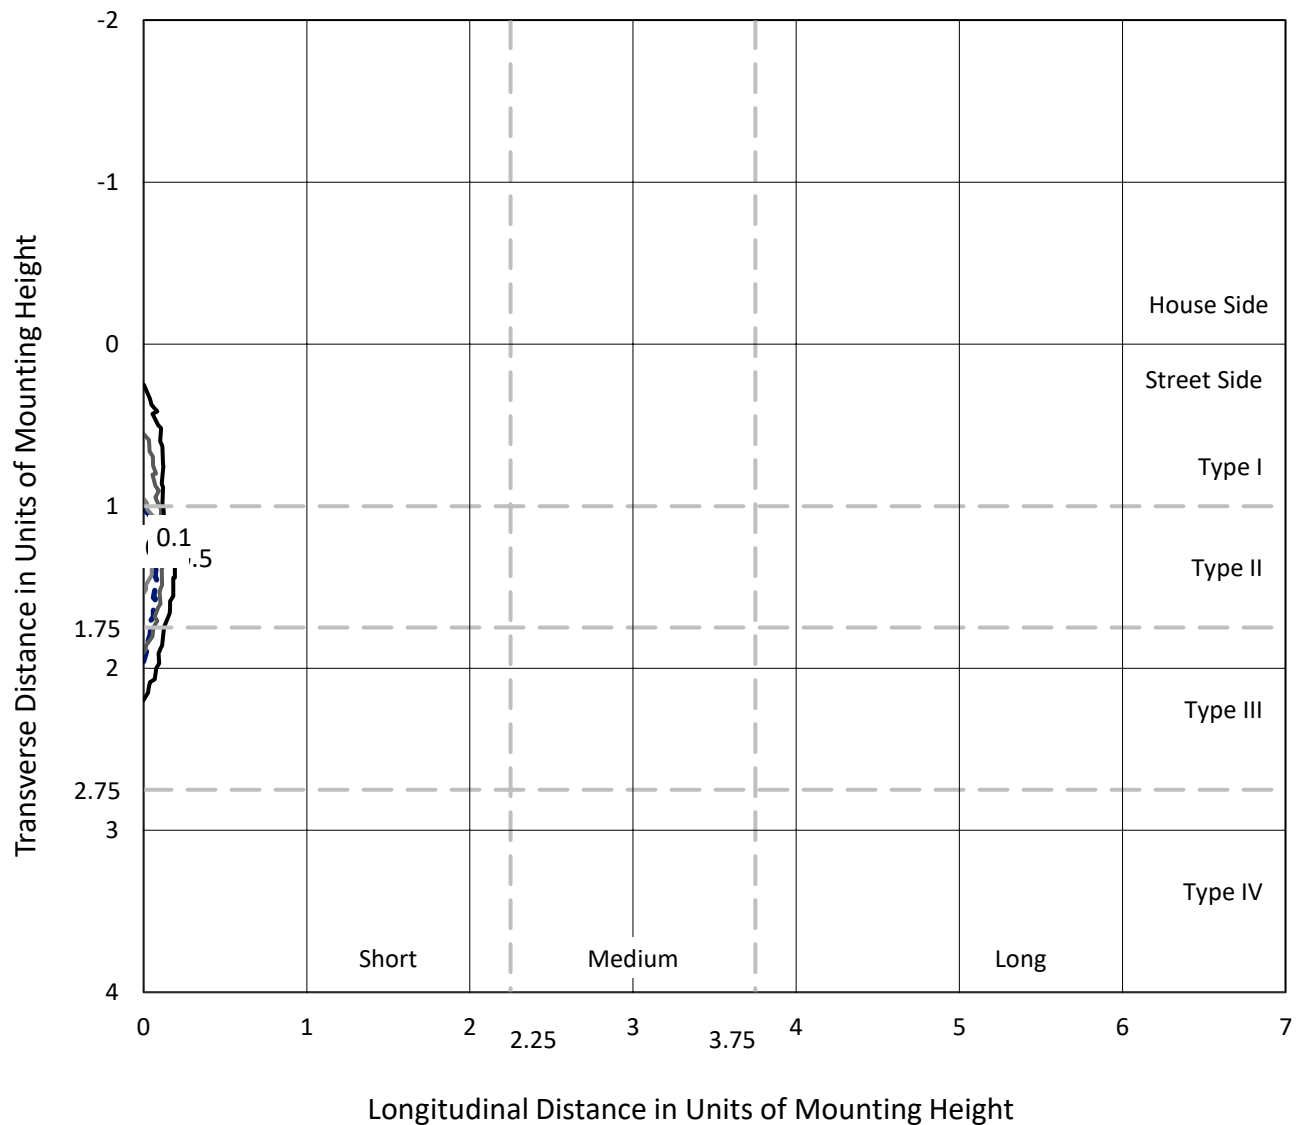


Based on 15 foot mounting height. Maximum calculated value = 0.9 fc
 Type III - Short - N/A

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

Luminous Intensity Polar Plot

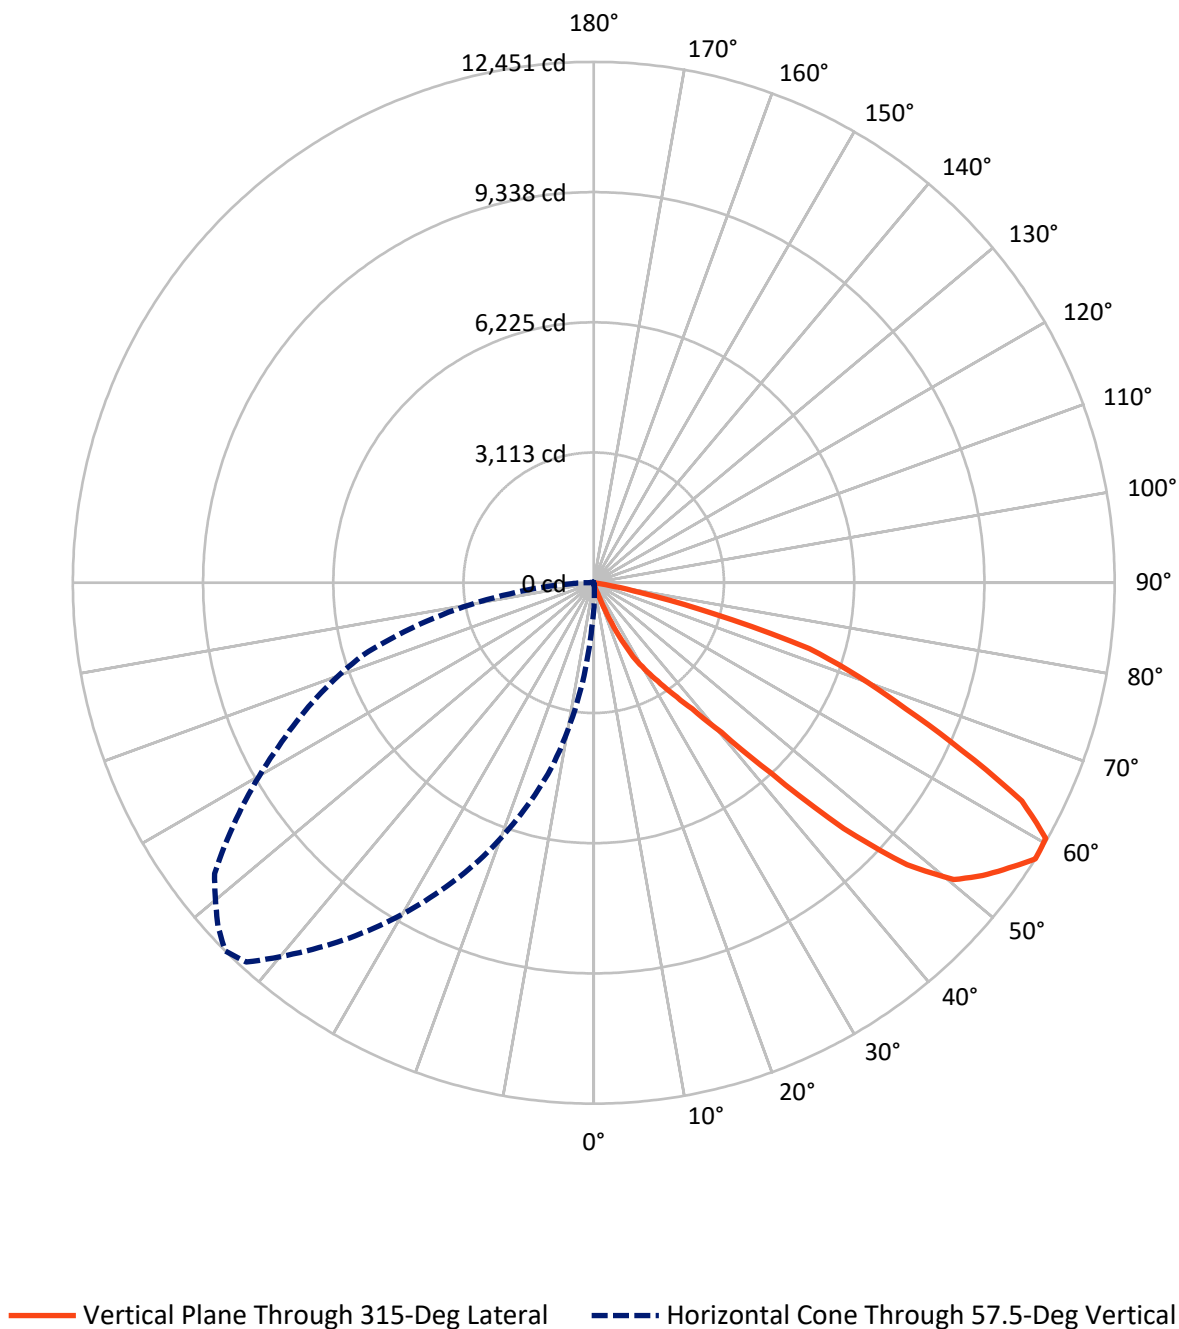

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	27.2	0.0	27.2
	% Fixture	0.6	0.0	0.6
Street Side	Lumens	4544.7	0.0	4544.7
	% Fixture	99.4	0.0	99.4
Total	Lumens	4571.9	0.0	4571.9
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1.4	0.0
10°-20°	6.7	0.1
20°-30°	85.3	1.9
30°-40°	287.6	6.3
40°-50°	868.5	19.0
50°-60°	1532.3	33.5
60°-70°	1350.0	29.5
70°-80°	429.7	9.4
80°-90°	10.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	4571.9	100.0
0°-180°	4571.9	100.0



REPORT NUMBER: P1066457


CATALOG NUMBER: NVN-SA2A-722-U-RBC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	89.3	2.0			
FM	(30°-60°)	2677.9	58.6			
FH	(60°-80°)	1769.1	38.7			G1/1800
FVH	(80°-90°)	8.4	0.2			G0/10
BL	(0°-30°)	4.1	0.1	B0/110		
BM	(30°-60°)	10.5	0.2	B0/220		
BH	(60°-80°)	10.7	0.2	B0/110		G0/110
BVH	(80°-90°)	1.9	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type III Short

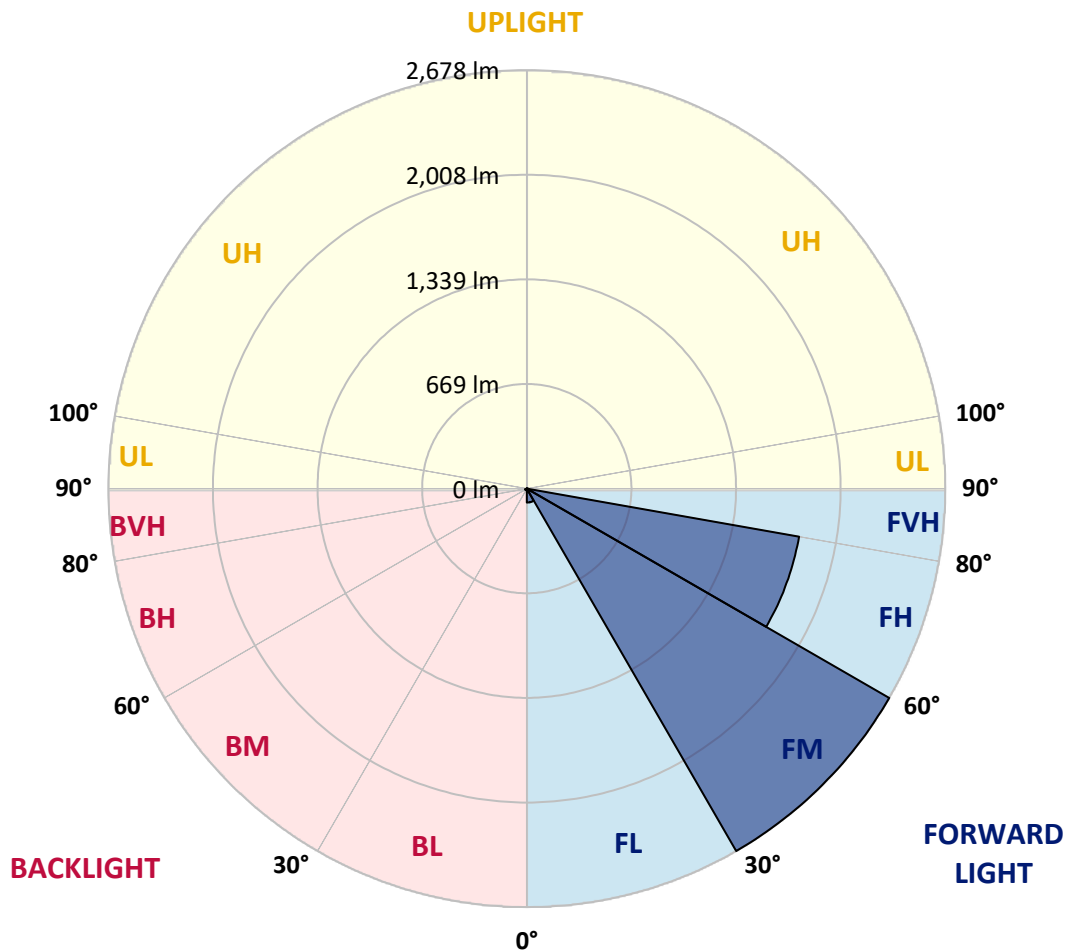



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (FULL):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	10.0
5°	14.3	14.3	14.3	12.9	12.9	12.9	11.5	11.5	11.5	11.5	11.5
7.5°	17.2	15.8	15.8	14.3	14.3	14.3	12.9	12.9	12.9	12.9	11.5
10°	20.1	18.6	18.6	17.2	17.2	15.8	15.8	14.3	14.3	12.9	12.9
12.5°	22.9	21.5	20.1	18.6	18.6	17.2	17.2	15.8	15.8	14.3	14.3
15°	25.8	24.4	22.9	21.5	20.1	20.1	18.6	17.2	15.8	15.8	14.3
17.5°	30.1	27.2	25.8	22.9	21.5	20.1	18.6	17.2	17.2	15.8	15.8
20°	31.5	28.7	27.2	24.4	22.9	21.5	20.1	18.6	17.2	17.2	15.8
22.5°	37.3	31.5	30.1	27.2	25.8	24.4	21.5	20.1	18.6	17.2	15.8
25°	45.9	37.3	33.0	28.7	27.2	24.4	22.9	20.1	18.6	17.2	15.8
27.5°	55.9	41.6	37.3	31.5	28.7	25.8	22.9	20.1	18.6	17.2	15.8
30°	68.8	48.7	41.6	34.4	31.5	28.7	24.4	21.5	20.1	18.6	15.8
32.5°	96.1	60.2	48.7	37.3	33.0	30.1	25.8	21.5	20.1	18.6	15.8
35°	116.1	73.1	58.8	43.0	37.3	33.0	27.2	21.5	20.1	18.6	15.8
37.5°	134.8	74.6	60.2	45.9	40.1	34.4	27.2	21.5	20.1	18.6	15.8
40°	164.9	77.4	60.2	43.0	38.7	33.0	28.7	22.9	21.5	18.6	17.2
42.5°	222.2	88.9	64.5	40.1	35.8	33.0	28.7	24.4	21.5	20.1	17.2
45°	369.9	131.9	87.5	41.6	37.3	33.0	28.7	24.4	22.9	20.1	18.6
47.5°	629.4	229.4	136.2	43.0	38.7	33.0	28.7	22.9	21.5	20.1	17.2
50°	805.8	293.9	172.0	50.2	43.0	37.3	30.1	22.9	21.5	20.1	18.6
52.5°	855.9	312.6	186.4	58.8	50.2	41.6	31.5	22.9	21.5	21.5	20.1
55°	784.3	304.0	186.4	68.8	57.3	47.3	35.8	24.4	22.9	22.9	21.5
57.5°	666.7	281.0	177.8	74.6	63.1	50.2	38.7	25.8	24.4	24.4	22.9
60°	549.1	236.6	160.6	83.2	70.3	57.3	44.4	31.5	30.1	28.7	25.8
62.5°	435.9	190.7	140.5	88.9	76.0	61.7	48.7	34.4	33.0	31.5	30.1
65°	328.3	166.3	130.5	93.2	78.9	64.5	50.2	35.8	34.4	34.4	33.0
67.5°	252.3	152.0	124.7	96.1	81.7	67.4	53.0	38.7	37.3	35.8	34.4
70°	199.3	140.5	117.6	94.6	81.7	68.8	54.5	41.6	38.7	37.3	34.4
72.5°	166.3	127.6	109.0	90.3	80.3	70.3	60.2	50.2	44.4	40.1	34.4
75°	139.1	114.7	98.9	81.7	74.6	68.8	61.7	54.5	47.3	40.1	33.0
77.5°	91.8	83.2	76.0	68.8	64.5	60.2	54.5	50.2	43.0	37.3	30.1
80°	38.7	35.8	37.3	37.3	37.3	37.3	35.8	35.8	31.5	27.2	21.5
82.5°	8.6	7.2	8.6	8.6	8.6	8.6	7.2	7.2	7.2	5.7	5.7
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
5°	11.5	11.5	11.5	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
7.5°	11.5	11.5	11.5	10.0	10.0	10.0	10.0	8.6	8.6	8.6	8.6
10°	11.5	11.5	11.5	10.0	10.0	10.0	10.0	8.6	8.6	8.6	8.6
12.5°	12.9	12.9	11.5	11.5	10.0	10.0	10.0	8.6	8.6	8.6	8.6
15°	12.9	12.9	11.5	11.5	10.0	10.0	10.0	8.6	8.6	8.6	8.6
17.5°	14.3	12.9	12.9	11.5	10.0	10.0	10.0	8.6	8.6	8.6	8.6
20°	14.3	12.9	12.9	11.5	10.0	10.0	10.0	8.6	8.6	8.6	8.6
22.5°	14.3	12.9	12.9	11.5	10.0	10.0	8.6	8.6	7.2	7.2	5.7
25°	14.3	12.9	12.9	11.5	10.0	10.0	8.6	8.6	7.2	5.7	5.7
27.5°	14.3	12.9	12.9	11.5	10.0	8.6	8.6	7.2	5.7	4.3	4.3
30°	14.3	12.9	12.9	11.5	10.0	8.6	7.2	5.7	4.3	4.3	2.9
32.5°	14.3	12.9	11.5	10.0	8.6	7.2	7.2	5.7	4.3	2.9	2.9
35°	14.3	12.9	11.5	10.0	8.6	7.2	7.2	5.7	4.3	2.9	2.9
37.5°	14.3	12.9	11.5	10.0	8.6	7.2	5.7	4.3	2.9	2.9	1.4
40°	14.3	12.9	11.5	10.0	8.6	7.2	5.7	4.3	2.9	2.9	1.4
42.5°	14.3	12.9	11.5	10.0	8.6	7.2	5.7	4.3	2.9	2.9	1.4
45°	15.8	14.3	12.9	10.0	8.6	7.2	7.2	5.7	4.3	2.9	2.9
47.5°	15.8	14.3	12.9	10.0	8.6	7.2	7.2	5.7	4.3	2.9	2.9
50°	17.2	15.8	14.3	11.5	10.0	8.6	7.2	4.3	2.9	2.9	1.4
52.5°	18.6	17.2	15.8	14.3	12.9	10.0	7.2	4.3	1.4	1.4	1.4
55°	20.1	18.6	18.6	17.2	15.8	11.5	8.6	4.3	0.0	0.0	0.0
57.5°	21.5	20.1	20.1	18.6	17.2	12.9	8.6	4.3	0.0	0.0	0.0
60°	24.4	22.9	21.5	18.6	17.2	12.9	8.6	4.3	0.0	0.0	0.0
62.5°	28.7	25.8	21.5	18.6	14.3	11.5	7.2	4.3	0.0	0.0	0.0
65°	31.5	27.2	22.9	17.2	12.9	10.0	7.2	2.9	0.0	0.0	0.0
67.5°	33.0	27.2	22.9	17.2	11.5	8.6	5.7	2.9	0.0	0.0	0.0
70°	31.5	25.8	21.5	15.8	10.0	7.2	5.7	2.9	0.0	0.0	0.0
72.5°	28.7	24.4	18.6	14.3	8.6	7.2	4.3	2.9	0.0	0.0	0.0
75°	25.8	21.5	15.8	11.5	5.7	4.3	2.9	1.4	0.0	0.0	0.0
77.5°	22.9	18.6	12.9	8.6	2.9	2.9	1.4	1.4	0.0	0.0	0.0
80°	17.2	12.9	8.6	4.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	4.3	2.9	2.9	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6
5°	8.6	8.6	8.6	8.6	7.2	7.2	7.2	7.2	7.2	7.2	7.2
7.5°	8.6	8.6	8.6	8.6	7.2	7.2	7.2	7.2	5.7	5.7	5.7
10°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	5.7	5.7	5.7
12.5°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	5.7	5.7	5.7
15°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	5.7	5.7	4.3	4.3
17.5°	7.2	7.2	7.2	7.2	5.7	5.7	5.7	4.3	4.3	2.9	2.9
20°	7.2	7.2	7.2	5.7	5.7	4.3	4.3	2.9	2.9	1.4	1.4
22.5°	5.7	4.3	4.3	2.9	2.9	1.4	1.4	1.4	0.0	0.0	0.0
25°	4.3	2.9	2.9	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	2.9	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	2.9	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	8.6	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
5°	7.2	7.2	7.2	7.2	5.7	5.7	5.7	5.7	5.7	5.7	5.7
7.5°	5.7	5.7	5.7	5.7	5.7	5.7	4.3	4.3	4.3	4.3	4.3
10°	5.7	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	2.9	2.9
12.5°	5.7	4.3	4.3	4.3	2.9	2.9	2.9	2.9	2.9	1.4	1.4
15°	4.3	2.9	2.9	2.9	1.4	1.4	1.4	1.4	1.4	0.0	0.0
17.5°	2.9	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	8.6	8.6
5°	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7
7.5°	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
10°	2.9	2.9	2.9	2.9	2.9	2.9	1.4	1.4	1.4	1.4	1.4
12.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
17.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	8.6	8.6	8.6	8.6	8.6	10.0	10.0	11.5	11.5	12.9	12.9
5°	5.7	5.7	7.2	7.2	7.2	7.2	8.6	8.6	8.6	10.0	10.0
7.5°	4.3	4.3	4.3	4.3	4.3	5.7	5.7	7.2	7.2	8.6	8.6
10°	1.4	1.4	2.9	2.9	2.9	2.9	4.3	4.3	4.3	5.7	7.2
12.5°	0.0	0.0	1.4	1.4	1.4	1.4	2.9	2.9	2.9	4.3	5.7
15°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4	2.9	4.3
17.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	2.9
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	14.3	14.3	15.8	15.8	17.2	17.2	18.6	18.6	18.6	18.6	18.6
5°	11.5	11.5	12.9	14.3	14.3	15.8	17.2	17.2	17.2	17.2	17.2
7.5°	10.0	10.0	11.5	12.9	12.9	14.3	15.8	15.8	17.2	17.2	17.2
10°	7.2	8.6	10.0	11.5	11.5	12.9	14.3	14.3	15.8	15.8	15.8
12.5°	5.7	7.2	8.6	10.0	10.0	11.5	12.9	12.9	14.3	14.3	15.8
15°	4.3	5.7	7.2	8.6	8.6	10.0	11.5	11.5	12.9	14.3	15.8
17.5°	2.9	4.3	5.7	7.2	7.2	8.6	10.0	11.5	12.9	12.9	14.3
20°	2.9	2.9	4.3	5.7	5.7	7.2	8.6	10.0	11.5	11.5	12.9
22.5°	1.4	1.4	2.9	4.3	4.3	5.7	7.2	8.6	10.0	10.0	11.5
25°	0.0	0.0	1.4	2.9	2.9	4.3	5.7	5.7	7.2	7.2	8.6
27.5°	0.0	0.0	1.4	1.4	2.9	2.9	4.3	4.3	5.7	5.7	7.2
30°	0.0	0.0	1.4	1.4	2.9	2.9	4.3	4.3	5.7	5.7	5.7
32.5°	0.0	0.0	0.0	1.4	1.4	1.4	2.9	2.9	4.3	4.3	5.7
35°	0.0	0.0	0.0	1.4	1.4	1.4	2.9	2.9	4.3	4.3	4.3
37.5°	0.0	0.0	0.0	1.4	1.4	1.4	2.9	2.9	2.9	2.9	4.3
40°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	2.9	2.9	2.9
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	2.9	2.9	2.9
45°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	2.9	2.9	2.9
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	2.9	2.9	2.9
50°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	2.9	2.9	2.9
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4
55°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4
75°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	2.9	2.9	2.9
80°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	2.9	2.9	2.9
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4	1.4	2.9
85°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	20.1	20.1	20.1	20.1	20.1	20.1	20.1	20.1	20.1	18.6	18.6
5°	18.6	18.6	18.6	18.6	18.6	18.6	18.6	18.6	18.6	17.2	17.2
7.5°	18.6	18.6	18.6	18.6	18.6	18.6	18.6	18.6	18.6	17.2	17.2
10°	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2
12.5°	15.8	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2
15°	15.8	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2
17.5°	14.3	15.8	15.8	15.8	17.2	17.2	17.2	17.2	17.2	17.2	17.2
20°	12.9	14.3	14.3	14.3	15.8	15.8	15.8	15.8	17.2	17.2	17.2
22.5°	11.5	12.9	12.9	12.9	14.3	14.3	14.3	14.3	15.8	15.8	15.8
25°	10.0	10.0	11.5	11.5	12.9	12.9	12.9	12.9	12.9	12.9	12.9
27.5°	7.2	8.6	8.6	8.6	10.0	10.0	10.0	10.0	11.5	11.5	11.5
30°	7.2	7.2	7.2	7.2	8.6	8.6	8.6	8.6	10.0	10.0	10.0
32.5°	5.7	7.2	7.2	7.2	8.6	8.6	8.6	8.6	10.0	10.0	10.0
35°	5.7	5.7	5.7	5.7	7.2	7.2	7.2	7.2	8.6	8.6	8.6
37.5°	4.3	5.7	5.7	5.7	7.2	7.2	7.2	7.2	8.6	8.6	8.6
40°	4.3	4.3	4.3	4.3	5.7	5.7	5.7	5.7	7.2	7.2	7.2
42.5°	4.3	4.3	4.3	4.3	5.7	5.7	5.7	5.7	7.2	7.2	7.2
45°	4.3	4.3	4.3	4.3	5.7	5.7	5.7	5.7	7.2	7.2	7.2
47.5°	4.3	4.3	4.3	4.3	5.7	5.7	5.7	5.7	7.2	7.2	7.2
50°	4.3	4.3	4.3	4.3	5.7	5.7	5.7	5.7	7.2	7.2	7.2
52.5°	2.9	2.9	2.9	2.9	4.3	4.3	4.3	4.3	5.7	5.7	5.7
55°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	4.3	4.3	4.3
57.5°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	4.3	4.3	4.3
60°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
62.5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
65°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	1.4	1.4
67.5°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
70°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
72.5°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
75°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
77.5°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
80°	4.3	4.3	4.3	4.3	4.3	2.9	2.9	2.9	2.9	2.9	2.9
82.5°	2.9	4.3	4.3	4.3	4.3	2.9	2.9	2.9	2.9	2.9	2.9
85°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
87.5°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	18.6	18.6	17.2	17.2	17.2	17.2	17.2	17.2	17.2	18.6	18.6
5°	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	18.6	18.6
7.5°	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	18.6	18.6
10°	17.2	17.2	17.2	17.2	15.8	15.8	17.2	17.2	17.2	18.6	18.6
12.5°	17.2	17.2	17.2	17.2	15.8	15.8	17.2	17.2	18.6	18.6	20.1
15°	17.2	17.2	15.8	15.8	15.8	15.8	17.2	17.2	18.6	18.6	20.1
17.5°	17.2	17.2	15.8	15.8	15.8	15.8	17.2	17.2	18.6	18.6	20.1
20°	17.2	17.2	15.8	15.8	15.8	15.8	15.8	15.8	17.2	18.6	18.6
22.5°	15.8	15.8	15.8	15.8	14.3	14.3	15.8	15.8	17.2	18.6	18.6
25°	12.9	14.3	14.3	14.3	14.3	14.3	15.8	15.8	17.2	18.6	18.6
27.5°	11.5	12.9	12.9	12.9	12.9	14.3	14.3	15.8	17.2	18.6	18.6
30°	10.0	11.5	11.5	11.5	12.9	14.3	14.3	15.8	17.2	18.6	18.6
32.5°	10.0	11.5	11.5	11.5	12.9	12.9	14.3	14.3	15.8	17.2	18.6
35°	10.0	10.0	11.5	11.5	11.5	12.9	12.9	14.3	15.8	17.2	18.6
37.5°	10.0	10.0	11.5	11.5	11.5	12.9	12.9	14.3	15.8	17.2	18.6
40°	8.6	10.0	10.0	11.5	11.5	12.9	12.9	14.3	15.8	18.6	20.1
42.5°	8.6	8.6	10.0	10.0	11.5	12.9	12.9	14.3	15.8	18.6	20.1
45°	8.6	10.0	10.0	11.5	12.9	14.3	14.3	15.8	17.2	18.6	20.1
47.5°	8.6	10.0	10.0	11.5	14.3	14.3	15.8	15.8	17.2	18.6	20.1
50°	8.6	10.0	10.0	11.5	15.8	15.8	15.8	15.8	17.2	18.6	20.1
52.5°	7.2	8.6	8.6	10.0	12.9	14.3	15.8	17.2	18.6	20.1	21.5
55°	5.7	7.2	7.2	8.6	11.5	12.9	15.8	18.6	20.1	21.5	22.9
57.5°	5.7	5.7	7.2	7.2	10.0	12.9	17.2	20.1	21.5	22.9	24.4
60°	4.3	4.3	5.7	5.7	8.6	11.5	15.8	20.1	21.5	24.4	25.8
62.5°	2.9	4.3	4.3	5.7	7.2	11.5	15.8	20.1	22.9	25.8	27.2
65°	2.9	2.9	4.3	4.3	7.2	10.0	14.3	17.2	21.5	25.8	30.1
67.5°	4.3	4.3	5.7	5.7	7.2	10.0	14.3	17.2	21.5	27.2	31.5
70°	4.3	4.3	5.7	5.7	8.6	11.5	14.3	17.2	21.5	27.2	31.5
72.5°	4.3	4.3	5.7	5.7	8.6	10.0	12.9	15.8	20.1	24.4	28.7
75°	2.9	4.3	4.3	4.3	7.2	8.6	11.5	14.3	18.6	22.9	27.2
77.5°	2.9	2.9	2.9	2.9	5.7	7.2	10.0	11.5	15.8	20.1	24.4
80°	2.9	2.9	2.9	2.9	4.3	5.7	8.6	10.0	14.3	18.6	22.9
82.5°	2.9	2.9	1.4	1.4	2.9	4.3	5.7	7.2	11.5	14.3	18.6
85°	2.9	2.9	1.4	1.4	1.4	2.9	2.9	4.3	5.7	7.2	8.6
87.5°	2.9	2.9	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	18.6	18.6	20.1	20.1	20.1	20.1	20.1	20.1	20.1	20.1	20.1
5°	18.6	20.1	20.1	21.5	21.5	21.5	22.9	22.9	22.9	22.9	22.9
7.5°	18.6	20.1	20.1	21.5	21.5	21.5	22.9	22.9	22.9	24.4	24.4
10°	18.6	20.1	20.1	21.5	21.5	22.9	24.4	24.4	25.8	25.8	25.8
12.5°	20.1	21.5	21.5	22.9	22.9	24.4	25.8	25.8	27.2	28.7	28.7
15°	20.1	21.5	22.9	22.9	24.4	25.8	27.2	27.2	28.7	30.1	31.5
17.5°	20.1	21.5	22.9	22.9	24.4	25.8	28.7	30.1	31.5	34.4	35.8
20°	20.1	21.5	22.9	22.9	24.4	27.2	28.7	31.5	33.0	35.8	38.7
22.5°	20.1	21.5	22.9	24.4	25.8	28.7	31.5	33.0	35.8	40.1	43.0
25°	20.1	21.5	22.9	24.4	25.8	28.7	31.5	34.4	37.3	43.0	48.7
27.5°	20.1	21.5	24.4	25.8	27.2	30.1	34.4	37.3	40.1	50.2	60.2
30°	20.1	21.5	24.4	25.8	27.2	31.5	35.8	38.7	43.0	60.2	76.0
32.5°	20.1	22.9	24.4	27.2	28.7	33.0	38.7	43.0	47.3	71.7	94.6
35°	20.1	22.9	24.4	27.2	28.7	34.4	40.1	45.9	51.6	87.5	123.3
37.5°	20.1	22.9	24.4	27.2	28.7	37.3	45.9	54.5	63.1	100.4	137.6
40°	21.5	24.4	25.8	28.7	30.1	38.7	47.3	55.9	64.5	101.8	139.1
42.5°	21.5	24.4	25.8	28.7	30.1	37.3	45.9	53.0	60.2	101.8	143.4
45°	21.5	24.4	27.2	28.7	31.5	38.7	45.9	51.6	58.8	111.8	163.4
47.5°	21.5	24.4	27.2	28.7	31.5	38.7	45.9	53.0	60.2	147.7	233.7
50°	21.5	24.4	27.2	28.7	31.5	40.1	48.7	57.3	66.0	220.8	375.6
52.5°	22.9	24.4	27.2	28.7	30.1	40.1	50.2	60.2	70.3	286.7	501.8
55°	24.4	25.8	27.2	28.7	30.1	43.0	55.9	68.8	81.7	308.3	533.4
57.5°	25.8	27.2	28.7	28.7	30.1	45.9	63.1	78.9	94.6	306.8	517.6
60°	27.2	28.7	30.1	31.5	33.0	48.7	66.0	81.7	97.5	278.1	458.8
62.5°	30.1	33.0	35.8	37.3	40.1	55.9	70.3	86.0	100.4	228.0	354.1
65°	34.4	37.3	38.7	41.6	43.0	57.3	73.1	87.5	101.8	189.3	275.3
67.5°	35.8	38.7	40.1	43.0	44.4	58.8	73.1	87.5	101.8	160.6	217.9
70°	35.8	38.7	41.6	43.0	45.9	60.2	73.1	87.5	100.4	139.1	177.8
72.5°	33.0	37.3	40.1	44.4	47.3	60.2	71.7	84.6	96.1	123.3	150.5
75°	31.5	37.3	41.6	47.3	51.6	60.2	70.3	78.9	87.5	107.5	127.6
77.5°	28.7	35.8	43.0	50.2	57.3	63.1	67.4	73.1	77.4	90.3	103.2
80°	27.2	34.4	41.6	48.7	55.9	58.8	60.2	63.1	64.5	66.0	67.4
82.5°	21.5	27.2	33.0	37.3	43.0	40.1	38.7	35.8	33.0	31.5	30.1
85°	10.0	11.5	11.5	12.9	12.9	12.9	11.5	11.5	10.0	8.6	7.2
87.5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	20.1	20.1	20.1	20.1	18.6	18.6	18.6	18.6	17.2	17.2	17.2
5°	22.9	22.9	22.9	22.9	21.5	21.5	21.5	21.5	20.1	20.1	20.1
7.5°	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4
10°	27.2	27.2	27.2	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7
12.5°	30.1	30.1	31.5	31.5	33.0	33.0	34.4	34.4	35.8	35.8	35.8
15°	33.0	34.4	35.8	37.3	37.3	38.7	40.1	41.6	43.0	44.4	45.9
17.5°	38.7	40.1	43.0	45.9	48.7	51.6	55.9	61.7	66.0	70.3	76.0
20°	43.0	47.3	55.9	66.0	74.6	83.2	104.7	126.2	147.7	169.2	190.7
22.5°	51.6	60.2	88.9	119.0	147.7	176.4	243.7	311.1	377.1	444.5	504.7
25°	68.8	87.5	153.4	219.4	283.9	349.8	470.3	592.1	712.6	833.0	944.8
27.5°	94.6	129.0	236.6	345.5	453.1	560.6	735.5	911.9	1086.8	1263.1	1419.4
30°	131.9	187.8	348.4	510.4	671.0	831.6	1052.4	1274.6	1495.4	1716.2	1859.6
32.5°	179.2	262.4	466.0	669.6	873.2	1076.7	1320.5	1564.2	1806.5	2050.3	2202.2
35°	229.4	335.5	580.7	827.3	1072.4	1319.0	1575.7	1832.3	2089.0	2345.6	2532.0
37.5°	258.1	378.5	669.6	960.6	1250.2	1541.3	1822.3	2104.7	2385.8	2666.8	2893.3
40°	285.3	430.1	765.6	1101.1	1436.6	1772.1	2100.4	2428.8	2757.1	3085.4	3376.5
42.5°	325.5	507.5	899.0	1290.4	1680.3	2071.8	2503.3	2936.3	3367.9	3799.4	4246.8
45°	408.6	653.8	1161.3	1668.9	2175.0	2682.5	3294.7	3908.4	4520.6	5134.2	5707.7
47.5°	609.3	983.5	1676.0	2368.5	3061.0	3753.5	4458.9	5164.3	5869.7	6575.2	7257.6
50°	943.4	1509.7	2375.7	3241.7	4106.2	4972.2	5676.2	6380.2	7082.7	7786.7	8464.8
52.5°	1257.4	2013.0	2943.5	3875.4	4805.9	5737.8	6361.5	6985.2	7608.9	8232.6	8889.2
55°	1364.9	2195.1	3137.0	4080.4	5022.4	5965.8	6566.5	7168.7	7769.5	8370.2	9051.2
57.5°	1270.3	2023.0	2972.2	3921.3	4869.0	5818.1	6489.1	7161.6	7832.5	8505.0	9234.7
60°	1063.8	1667.4	2663.9	3661.8	4658.2	5654.7	6411.7	7168.7	7925.7	8682.8	9411.1
62.5°	843.0	1330.5	2385.8	3441.0	4496.2	5551.5	6321.4	7092.7	7862.7	8632.6	9191.7
65°	646.6	1018.0	2056.0	3095.5	4133.5	5172.9	5803.8	6436.1	7066.9	7699.2	8086.3
67.5°	480.3	742.7	1650.2	2559.2	3466.8	4374.4	4838.9	5304.9	5769.4	6235.4	6536.4
70°	354.1	529.1	1147.0	1764.9	2381.4	2999.4	3425.2	3851.0	4275.4	4701.2	5013.8
72.5°	245.2	338.4	708.3	1079.6	1449.5	1819.4	2251.0	2682.5	3112.7	3544.2	3899.8
75°	167.7	207.9	381.4	554.9	728.3	901.8	1228.7	1555.6	1882.5	2209.4	2397.2
77.5°	124.7	146.2	197.9	250.9	302.5	354.1	417.2	480.3	543.4	606.5	688.2
80°	68.8	68.8	76.0	81.7	88.9	94.6	111.8	130.5	147.7	166.3	189.3
82.5°	31.5	33.0	35.8	38.7	40.1	43.0	45.9	48.7	51.6	54.5	54.5
85°	8.6	10.0	10.0	8.6	8.6	7.2	7.2	8.6	8.6	8.6	8.6
87.5°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	17.2	15.8	15.8	15.8	14.3	14.3	14.3	14.3	14.3	14.3	14.3
5°	20.1	20.1	20.1	20.1	18.6	18.6	18.6	18.6	18.6	17.2	17.2
7.5°	24.4	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	21.5	21.5
10°	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	27.2	27.2
12.5°	35.8	35.8	35.8	35.8	37.3	37.3	35.8	35.8	35.8	34.4	34.4
15°	47.3	48.7	50.2	50.2	51.6	51.6	51.6	50.2	50.2	48.7	47.3
17.5°	80.3	84.6	90.3	96.1	101.8	106.1	106.1	103.2	100.4	97.5	94.6
20°	213.6	235.1	258.1	281.0	305.4	322.6	311.1	302.5	293.9	283.9	275.3
22.5°	566.3	626.5	688.2	731.2	774.2	804.3	780.0	732.6	685.3	639.4	592.1
25°	1056.7	1167.1	1278.9	1324.8	1372.1	1406.5	1390.7	1319.0	1247.4	1177.1	1105.4
27.5°	1575.7	1730.5	1886.8	1927.0	1967.1	1997.2	1991.5	1898.3	1805.1	1711.9	1618.7
30°	2002.9	2146.3	2289.7	2329.8	2370.0	2397.2	2367.1	2273.9	2180.7	2087.5	1994.3
32.5°	2355.6	2507.6	2661.0	2714.1	2767.1	2803.0	2767.1	2655.3	2543.5	2433.1	2321.2
35°	2718.4	2903.3	3089.7	3157.1	3224.5	3267.5	3207.3	3069.6	2932.0	2795.8	2658.2
37.5°	3119.8	3344.9	3571.5	3663.2	3756.4	3820.9	3775.0	3603.0	3429.5	3257.5	3084.0
40°	3669.0	3960.0	4252.5	4417.4	4580.8	4696.9	4615.2	4415.9	4215.2	4015.9	3815.2
42.5°	4695.5	5142.8	5590.2	5826.7	6061.9	6232.5	6140.7	5895.6	5650.4	5405.2	5160.0
45°	6281.2	6853.3	7426.8	7772.3	8119.3	8374.5	8268.4	7960.1	7650.5	7342.2	7033.9
47.5°	7940.1	8622.5	9305.0	9580.3	9857.0	10072.1	10046.2	9662.0	9277.8	8894.9	8510.7
50°	9144.4	9822.6	10500.7	10737.3	10975.3	11151.7	11085.7	10596.8	10106.5	9617.6	9127.2
52.5°	9545.9	10201.1	10857.7	11140.2	11422.6	11633.4	11553.1	11002.6	10452.0	9902.9	9352.3
55°	9732.3	10413.3	11094.3	11438.4	11783.9	12036.3	11920.1	11316.5	10711.5	10107.9	9502.9
57.5°	9964.5	10694.3	11424.1	11801.1	12178.2	12450.6	12295.8	11670.7	11045.6	10421.9	9796.8
60°	10139.4	10866.3	11594.7	11897.2	12201.2	12413.4	12264.2	11656.3	11047.0	10439.1	9831.2
62.5°	9752.3	10311.5	10870.6	11095.7	11320.8	11484.3	11399.7	10823.3	10247.0	9670.6	9094.2
65°	8474.9	8862.0	9250.5	9402.5	9553.0	9669.2	9643.4	9157.3	8671.3	8186.7	7700.6
67.5°	6839.0	7140.0	7442.6	7657.6	7874.1	8041.9	8023.2	7580.2	7137.2	6694.2	6251.1
70°	5327.8	5640.3	5952.9	6223.9	6496.3	6707.1	6679.8	6268.3	5855.4	5443.9	5031.0
72.5°	4256.8	4612.4	4967.9	5122.8	5277.6	5386.6	5306.3	4995.2	4682.6	4371.5	4058.9
75°	2585.0	2771.4	2959.2	2957.8	2957.8	2940.6	2860.3	2682.5	2504.8	2327.0	2149.2
77.5°	769.9	851.6	933.4	1012.2	1092.5	1152.7	1137.0	1043.8	949.1	855.9	761.3
80°	212.2	233.7	256.6	266.7	276.7	289.6	322.6	299.7	276.7	255.2	232.3
82.5°	54.5	54.5	54.5	53.0	51.6	48.7	44.4	41.6	38.7	35.8	33.0
85°	8.6	7.2	7.2	7.2	5.7	5.7	5.7	5.7	4.3	4.3	2.9
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
0°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
2.5°	14.3	14.3	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	11.5
5°	17.2	17.2	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	14.3
7.5°	21.5	21.5	20.1	20.1	20.1	20.1	18.6	18.6	18.6	18.6	17.2
10°	27.2	25.8	25.8	24.4	24.4	24.4	22.9	22.9	22.9	21.5	21.5
12.5°	34.4	33.0	33.0	31.5	30.1	30.1	28.7	27.2	25.8	25.8	24.4
15°	45.9	44.4	43.0	41.6	40.1	37.3	35.8	33.0	31.5	30.1	28.7
17.5°	87.5	80.3	73.1	66.0	60.2	54.5	48.7	43.0	40.1	37.3	34.4
20°	243.7	210.8	179.2	147.7	127.6	107.5	87.5	67.4	58.8	51.6	43.0
22.5°	527.6	461.7	397.1	331.2	278.1	226.5	173.5	120.4	100.4	81.7	61.7
25°	980.7	854.5	729.8	603.6	503.2	402.9	302.5	202.2	164.9	127.6	90.3
27.5°	1455.3	1291.8	1128.4	964.9	805.8	645.2	484.6	325.5	260.9	197.9	133.3
30°	1820.9	1647.4	1475.3	1301.8	1101.1	900.4	698.2	497.5	395.7	293.9	190.7
32.5°	2134.8	1947.0	1760.6	1572.8	1340.6	1108.3	876.0	643.8	516.1	388.5	259.5
35°	2446.0	2232.3	2020.1	1806.5	1557.0	1307.6	1058.1	808.6	646.6	484.6	321.2
37.5°	2824.5	2563.5	2304.0	2044.5	1787.9	1532.7	1276.0	1019.4	812.9	607.9	401.4
40°	3484.0	3151.4	2820.2	2487.5	2187.9	1889.7	1590.0	1290.4	1030.9	771.4	510.4
42.5°	4742.8	4325.6	3909.8	3492.6	3078.2	2663.9	2248.1	1833.8	1463.9	1095.4	725.5
45°	6499.2	5964.4	5431.0	4896.2	4385.8	3876.8	3366.4	2856.0	2294.0	1732.0	1168.5
47.5°	7925.7	7339.3	6754.4	6168.0	5601.6	5036.7	4470.4	3904.1	3184.3	2466.0	1746.3
50°	8569.5	8010.3	7452.6	6893.4	6325.7	5756.5	5187.3	4619.5	3793.7	2969.3	2143.4
52.5°	8786.0	8218.2	7651.9	7084.1	6520.7	5957.2	5393.7	4830.3	3971.5	3114.1	2255.3
55°	8905.0	8305.7	7707.8	7108.5	6502.0	5894.1	5286.2	4679.7	3825.2	2972.2	2117.6
57.5°	9145.9	8493.5	7842.6	7190.2	6499.2	5808.1	5115.6	4424.5	3581.5	2738.5	1895.4
60°	9190.3	8548.0	7907.1	7266.2	6502.0	5737.8	4972.2	4208.0	3370.7	2534.9	1697.6
62.5°	8558.0	8021.8	7487.0	6950.8	6185.2	5419.6	4652.5	3886.9	3085.4	2284.0	1481.1
65°	7237.5	6774.4	6312.8	5849.7	5224.6	4600.9	3975.8	3350.7	2635.2	1921.2	1205.8
67.5°	5798.1	5345.0	4893.4	4440.3	3970.0	3501.2	3030.9	2560.7	2008.7	1456.7	904.7
70°	4596.6	4160.7	3726.3	3290.4	2874.7	2457.4	2040.2	1624.4	1281.8	940.5	597.9
72.5°	3643.1	3225.9	2810.1	2392.9	2015.8	1638.8	1261.7	884.6	714.0	544.8	374.2
75°	1932.7	1716.2	1501.1	1284.6	1072.4	858.8	645.2	433.0	365.6	298.2	229.4
77.5°	666.7	572.1	478.9	384.2	319.7	255.2	190.7	126.2	119.0	113.3	106.1
80°	202.2	172.0	141.9	111.8	98.9	86.0	73.1	60.2	55.9	51.6	45.9
82.5°	31.5	28.7	27.2	24.4	22.9	22.9	21.5	20.1	17.2	15.8	12.9
85°	2.9	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	357.5°	360°
0°	12.9	12.9
2.5°	11.5	11.5
5°	14.3	14.3
7.5°	17.2	17.2
10°	20.1	20.1
12.5°	22.9	22.9
15°	27.2	25.8
17.5°	31.5	30.1
20°	34.4	31.5
22.5°	41.6	35.8
25°	53.0	44.4
27.5°	68.8	54.5
30°	88.9	68.8
32.5°	131.9	96.1
35°	159.1	116.1
37.5°	195.0	134.8
40°	250.9	163.4
42.5°	355.6	222.2
45°	606.5	368.5
47.5°	1028.0	628.0
50°	1317.6	805.8
52.5°	1397.9	854.5
55°	1264.6	784.3
57.5°	1052.4	666.7
60°	861.7	549.1
62.5°	679.6	434.4
65°	490.3	328.3
67.5°	352.7	252.3
70°	256.6	197.9
72.5°	203.6	164.9
75°	162.0	137.6
77.5°	100.4	91.8
80°	41.6	38.7
82.5°	10.0	8.6
85°	0.0	0.0
87.5°	0.0	0.0
90°	0.0	0.0
92.5°	0.0	0.0
95°	0.0	0.0
97.5°	0.0	0.0
100°	0.0	0.0
102.5°	0.0	0.0
105°	0.0	0.0
107.5°	0.0	0.0
110°	0.0	0.0



REPORT NUMBER: P1066457

CATALOG NUMBER: NVN-SA2A-722-U-RBC

CANDELA DISTRIBUTION (continued):

	357.5°	360°
112.5°	0.0	0.0
115°	0.0	0.0
117.5°	0.0	0.0
120°	0.0	0.0
122.5°	0.0	0.0
125°	0.0	0.0
127.5°	0.0	0.0
130°	0.0	0.0
132.5°	0.0	0.0
135°	0.0	0.0
137.5°	0.0	0.0
140°	0.0	0.0
142.5°	0.0	0.0
145°	0.0	0.0
147.5°	0.0	0.0
150°	0.0	0.0
152.5°	0.0	0.0
155°	0.0	0.0
157.5°	0.0	0.0
160°	0.0	0.0
162.5°	0.0	0.0
165°	0.0	0.0
167.5°	0.0	0.0
170°	0.0	0.0
172.5°	0.0	0.0
175°	0.0	0.0
177.5°	0.0	0.0
180°	0.0	0.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-2

Test Date: 10/09/2024

Luminaire Tested: GSS-SB1A-722-U-5WQ


Data in this report applies to families of products including GSS-SB1A-722-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-2
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-722-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI
 2200K CCT 26 LEDS

Spectral Parameters

CCT (K):	2160	CRI (Ra):	71.9		
CIE u':	0.2927	R1:	68.7	R9:	-17.8
CIE v':	0.5388	R2:	82.6	R10:	60.5
Duv:	0.0015	R3:	95.5	R11:	60.2
CIE x:	0.5130	R4:	66.4	R12:	48.2
CIE y:	0.4197	R5:	65.4	R13:	70.7
CIE z:	0.0674	R6:	75.9	R14:	96.8
Peak Wavelength (nm):	609	R7:	77.2	R15:	61.8
Dominant Wavelength (nm):	587	R8:	43.5		
Purity:	79.96089				
Rf:	70.6				
Rg:	97.6				

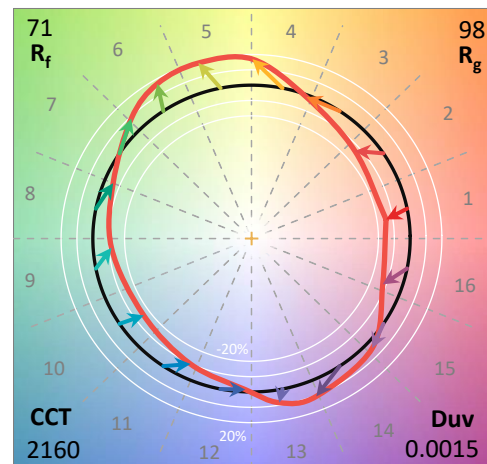

Test Conditions

Stabilization Time: 21M
 Operation Time: 1H 21M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-2

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-2

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 2200K 7-step quadrangle

REPORT NUMBER: SP1-2407-184-2

Photopic Flux vs. Wavelength




Photopic Lumens: NR

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	27	NR	620	966	NR	750	46	NR	880	1	NR
365	0	NR	495	42	NR	625	930	NR	755	39	NR	885	1	NR
370	0	NR	500	67	NR	630	888	NR	760	34	NR	890	1	NR
375	0	NR	505	101	NR	635	835	NR	765	30	NR	895	1	NR
380	0	NR	510	139	NR	640	778	NR	770	26	NR	900	1	NR
385	0	NR	515	183	NR	645	717	NR	775	22	NR	905	1	NR
390	0	NR	520	224	NR	650	656	NR	780	19	NR	910	1	NR
395	0	NR	525	262	NR	655	595	NR	785	17	NR	915	1	NR
400	1	NR	530	299	NR	660	536	NR	790	15	NR	920	1	NR
405	3	NR	535	332	NR	665	480	NR	795	13	NR	925	1	NR
410	7	NR	540	365	NR	670	425	NR	800	11	NR	930	1	NR
415	17	NR	545	400	NR	675	376	NR	805	10	NR	935	0	NR
420	36	NR	550	437	NR	680	332	NR	810	8	NR	940	0	NR
425	67	NR	555	479	NR	685	291	NR	815	8	NR	945	0	NR
430	105	NR	560	525	NR	690	255	NR	820	7	NR	950	0	NR
435	141	NR	565	579	NR	695	221	NR	825	6	NR	955	0	NR
440	169	NR	570	639	NR	700	192	NR	830	5	NR	960	0	NR
445	173	NR	575	703	NR	705	167	NR	835	4	NR	965	0	NR
450	136	NR	580	769	NR	710	144	NR	840	4	NR	970	0	NR
455	80	NR	585	832	NR	715	125	NR	845	3	NR	975	0	NR
460	45	NR	590	890	NR	720	109	NR	850	3	NR	980	0	NR
465	32	NR	595	937	NR	725	94	NR	855	3	NR	985	0	NR
470	23	NR	600	972	NR	730	81	NR	860	2	NR	990	0	NR
475	18	NR	605	992	NR	735	70	NR	865	2	NR	995	0	NR
480	18	NR	610	998	NR	740	61	NR	870	2	NR	1000	0	NR
485	20	NR	615	990	NR	745	53	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-2

Scotopic Flux vs. Wavelength

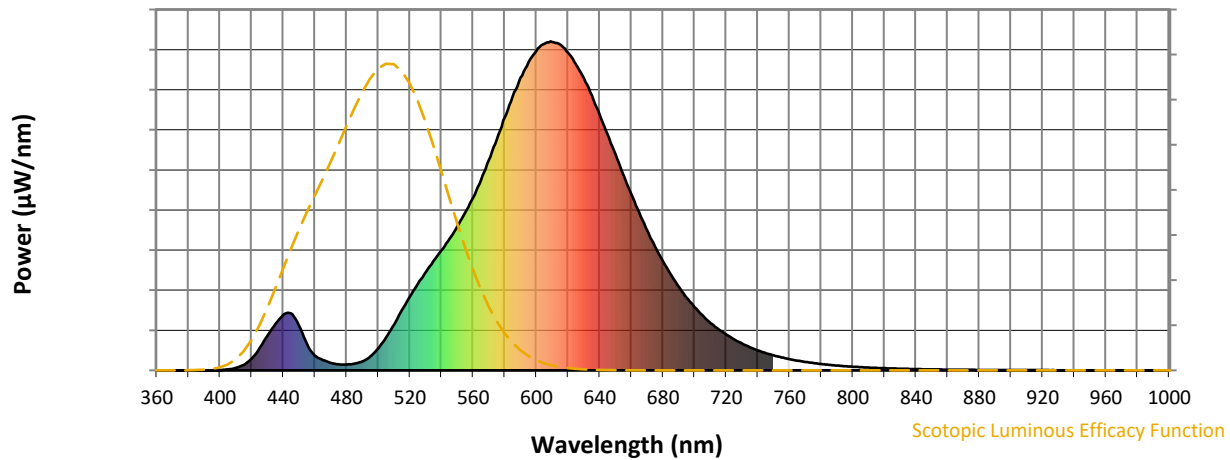

Scotopic Lumens: NR

S/P: 0.8

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	27	NR	620	966	NR	750	46	NR	880	1	NR
365	0	NR	495	42	NR	625	930	NR	755	39	NR	885	1	NR
370	0	NR	500	67	NR	630	888	NR	760	34	NR	890	1	NR
375	0	NR	505	101	NR	635	835	NR	765	30	NR	895	1	NR
380	0	NR	510	139	NR	640	778	NR	770	26	NR	900	1	NR
385	0	NR	515	183	NR	645	717	NR	775	22	NR	905	1	NR
390	0	NR	520	224	NR	650	656	NR	780	19	NR	910	1	NR
395	0	NR	525	262	NR	655	595	NR	785	17	NR	915	1	NR
400	1	NR	530	299	NR	660	536	NR	790	15	NR	920	1	NR
405	3	NR	535	332	NR	665	480	NR	795	13	NR	925	1	NR
410	7	NR	540	365	NR	670	425	NR	800	11	NR	930	1	NR
415	17	NR	545	400	NR	675	376	NR	805	10	NR	935	0	NR
420	36	NR	550	437	NR	680	332	NR	810	8	NR	940	0	NR
425	67	NR	555	479	NR	685	291	NR	815	8	NR	945	0	NR
430	105	NR	560	525	NR	690	255	NR	820	7	NR	950	0	NR
435	141	NR	565	579	NR	695	221	NR	825	6	NR	955	0	NR
440	169	NR	570	639	NR	700	192	NR	830	5	NR	960	0	NR
445	173	NR	575	703	NR	705	167	NR	835	4	NR	965	0	NR
450	136	NR	580	769	NR	710	144	NR	840	4	NR	970	0	NR
455	80	NR	585	832	NR	715	125	NR	845	3	NR	975	0	NR
460	45	NR	590	890	NR	720	109	NR	850	3	NR	980	0	NR
465	32	NR	595	937	NR	725	94	NR	855	3	NR	985	0	NR
470	23	NR	600	972	NR	730	81	NR	860	2	NR	990	0	NR
475	18	NR	605	992	NR	735	70	NR	865	2	NR	995	0	NR
480	18	NR	610	998	NR	740	61	NR	870	2	NR	1000	0	NR
485	20	NR	615	990	NR	745	53	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-2

Melanopic Flux vs. Wavelength


Melanopic Lumens: NR
M/P: 1.21

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	27	NR	620	966	NR	750	46	NR	880	1	NR
365	0	NR	495	42	NR	625	930	NR	755	39	NR	885	1	NR
370	0	NR	500	67	NR	630	888	NR	760	34	NR	890	1	NR
375	0	NR	505	101	NR	635	835	NR	765	30	NR	895	1	NR
380	0	NR	510	139	NR	640	778	NR	770	26	NR	900	1	NR
385	0	NR	515	183	NR	645	717	NR	775	22	NR	905	1	NR
390	0	NR	520	224	NR	650	656	NR	780	19	NR	910	1	NR
395	0	NR	525	262	NR	655	595	NR	785	17	NR	915	1	NR
400	1	NR	530	299	NR	660	536	NR	790	15	NR	920	1	NR
405	3	NR	535	332	NR	665	480	NR	795	13	NR	925	1	NR
410	7	NR	540	365	NR	670	425	NR	800	11	NR	930	1	NR
415	17	NR	545	400	NR	675	376	NR	805	10	NR	935	0	NR
420	36	NR	550	437	NR	680	332	NR	810	8	NR	940	0	NR
425	67	NR	555	479	NR	685	291	NR	815	8	NR	945	0	NR
430	105	NR	560	525	NR	690	255	NR	820	7	NR	950	0	NR
435	141	NR	565	579	NR	695	221	NR	825	6	NR	955	0	NR
440	169	NR	570	639	NR	700	192	NR	830	5	NR	960	0	NR
445	173	NR	575	703	NR	705	167	NR	835	4	NR	965	0	NR
450	136	NR	580	769	NR	710	144	NR	840	4	NR	970	0	NR
455	80	NR	585	832	NR	715	125	NR	845	3	NR	975	0	NR
460	45	NR	590	890	NR	720	109	NR	850	3	NR	980	0	NR
465	32	NR	595	937	NR	725	94	NR	855	3	NR	985	0	NR
470	23	NR	600	972	NR	730	81	NR	860	2	NR	990	0	NR
475	18	NR	605	992	NR	735	70	NR	865	2	NR	995	0	NR
480	18	NR	610	998	NR	740	61	NR	870	2	NR	1000	0	NR
485	20	NR	615	990	NR	745	53	NR	875	2	NR			


REPORT NUMBER: SP1-2407-184-2

TM-30-18





Summary

$R_f = 70.6$
 $R_g = 97.6$
 $CIE R_a = 71.9$
 $R_g = -17.8$

Spectral Power Distribution Comparison

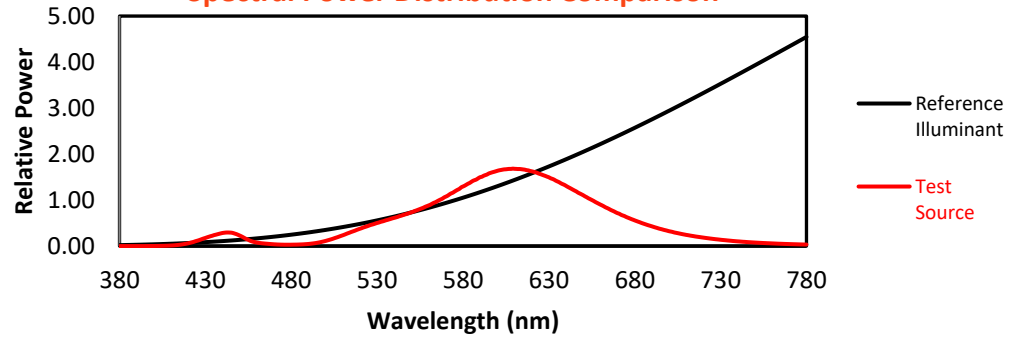

Color Vector Graphics

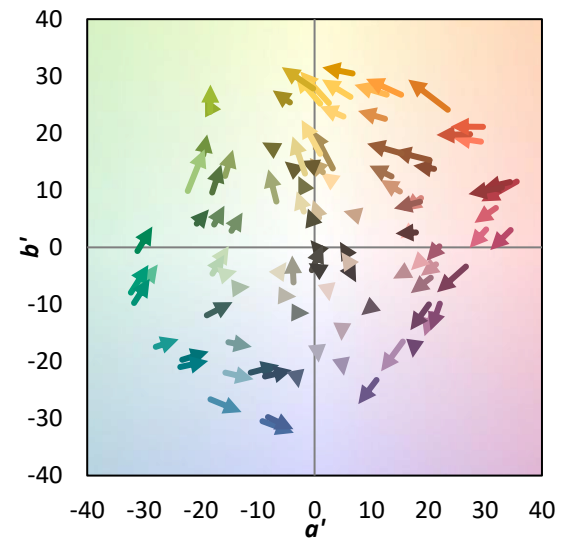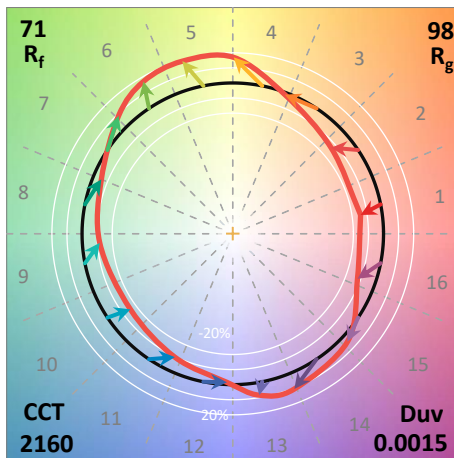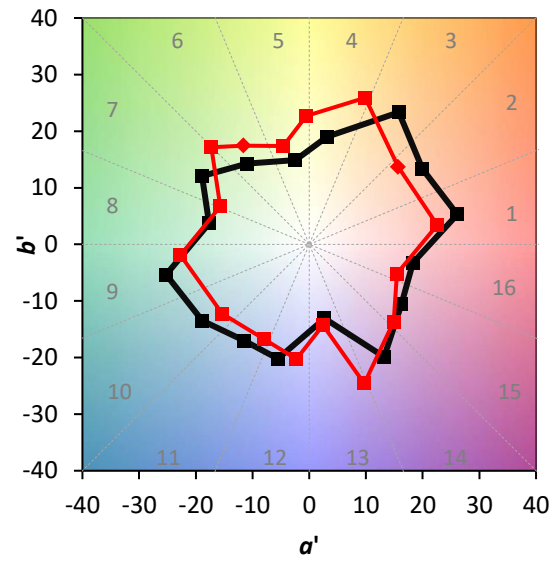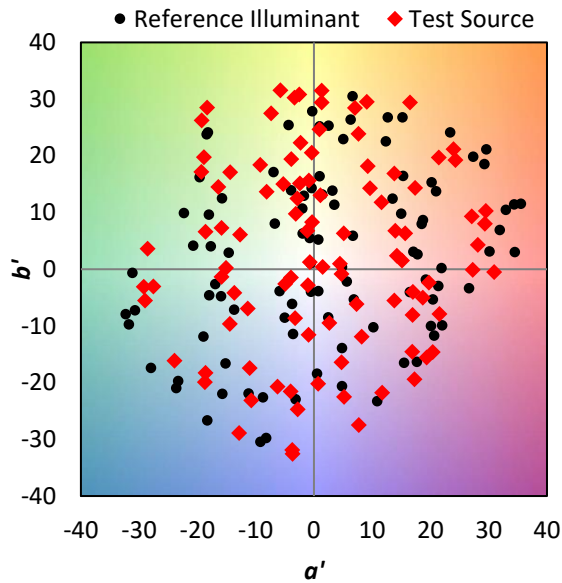

Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 87	CES26 = 60	CES51 = 74	CES76 = 58
CES02 = 65	CES27 = 77	CES52 = 77	CES77 = 82
CES03 = 32	CES28 = 85	CES53 = 65	CES78 = 65
CES04 = 72	CES29 = 50	CES54 = 77	CES79 = 86
CES05 = 52	CES30 = 49	CES55 = 74	CES80 = 85
CES06 = 53	CES31 = 55	CES56 = 64	CES81 = 61
CES07 = 44	CES32 = 55	CES57 = 60	CES82 = 93
CES08 = 43	CES33 = 55	CES58 = 64	CES83 = 83
CES09 = 29	CES34 = 75	CES59 = 84	CES84 = 93
CES10 = 79	CES35 = 88	CES60 = 89	CES85 = 81
CES11 = 62	CES36 = 78	CES61 = 84	CES86 = 55
CES12 = 68	CES37 = 82	CES62 = 68	CES87 = 79
CES13 = 45	CES38 = 54	CES63 = 68	CES88 = 72
CES14 = 75	CES39 = 90	CES64 = 69	CES89 = 62
CES15 = 72	CES40 = 86	CES65 = 66	CES90 = 67
CES16 = 49	CES41 = 75	CES66 = 64	CES91 = 89
CES17 = 51	CES42 = 83	CES67 = 63	CES92 = 67
CES18 = 57	CES43 = 68	CES68 = 71	CES93 = 78
CES19 = 74	CES44 = 98	CES69 = 81	CES94 = 52
CES20 = 68	CES45 = 76	CES70 = 65	CES95 = 76
CES21 = 89	CES46 = 68	CES71 = 64	CES96 = 78
CES22 = 81	CES47 = 60	CES72 = 88	CES97 = 76
CES23 = 92	CES48 = 47	CES73 = 59	CES98 = 71
CES24 = 92	CES49 = 65	CES74 = 85	CES99 = 65
CES25 = 74	CES50 = 74	CES75 = 66	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)