

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1066095

Luminaire Tested: **NVN-SA1C-760-U-T2BC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1066095
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: NVN-SA1C-760-U-T2BC
Description: Navion AREA AND ROADWAY LUMINAIRE 1050mA 1xLight Square PACKAGE
70CRI 5700K FIXTURE w/ TYPE II ANGLED BACKLIGHT CONTROL
Light Source: (14) 5700K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5656.9 lumens
Efficiency: N/A
Efficacy: 112.9 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B0 - U0 - G1

Input Watts (W): 50.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1066095

CATALOG NUMBER: NVN-SA1C-760-U-T2BC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 - - - 1/2 Max cd

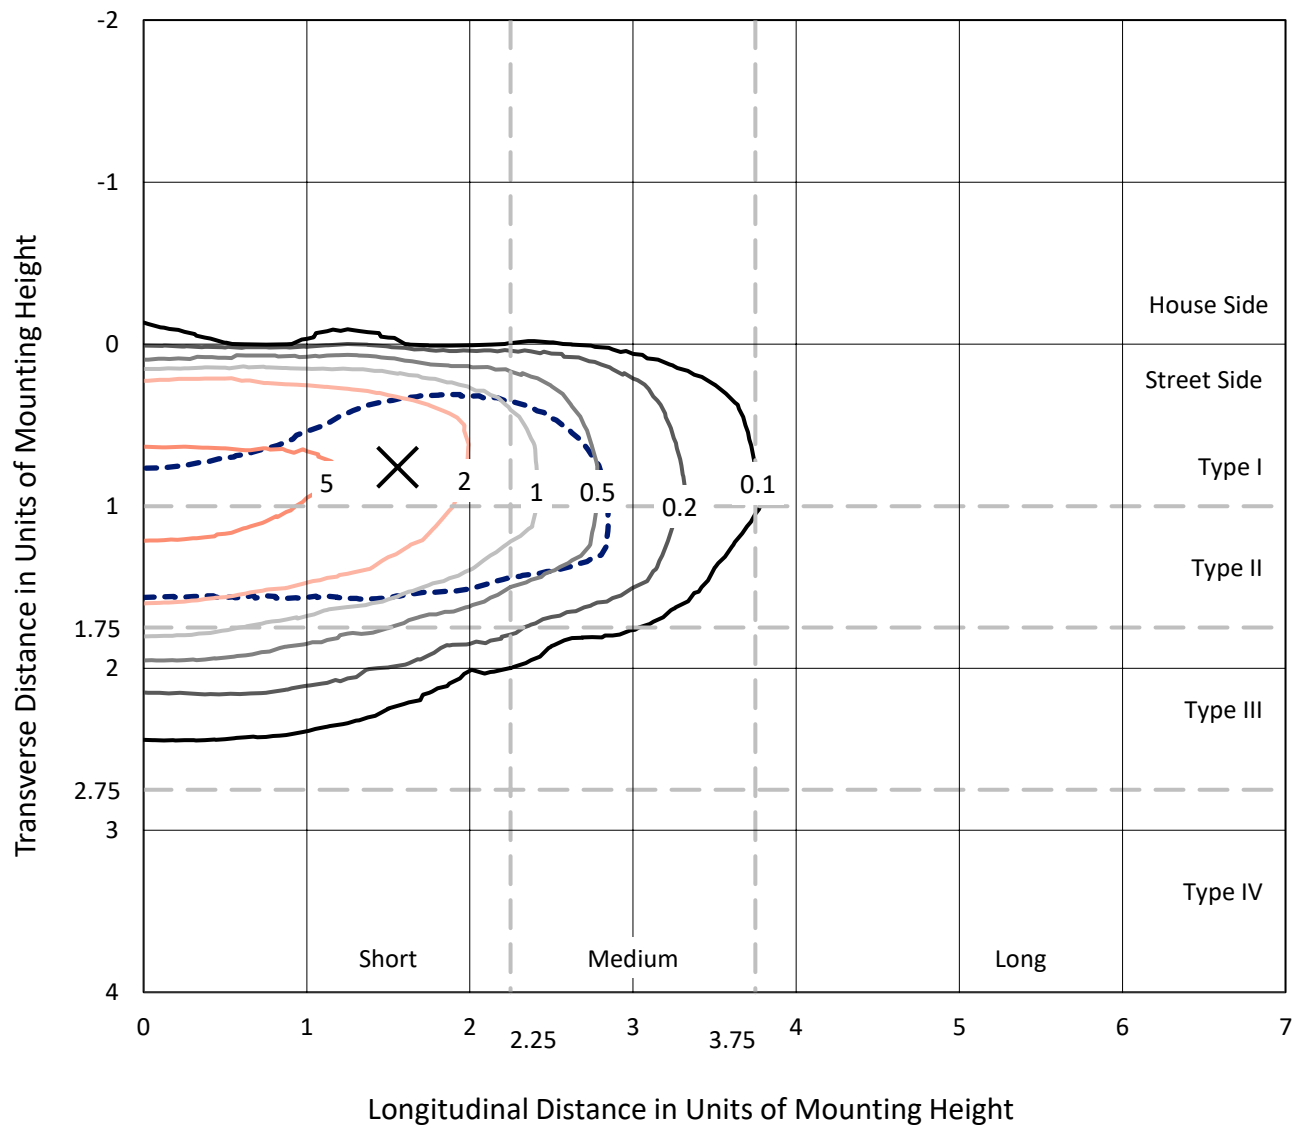


Based on 15 foot mounting height. Maximum calculated value = 8.1 fc
 Type II - Short - N/A

REPORT NUMBER: P1066095

CATALOG NUMBER: NVN-SA1C-760-U-T2BC

Luminous Intensity Polar Plot

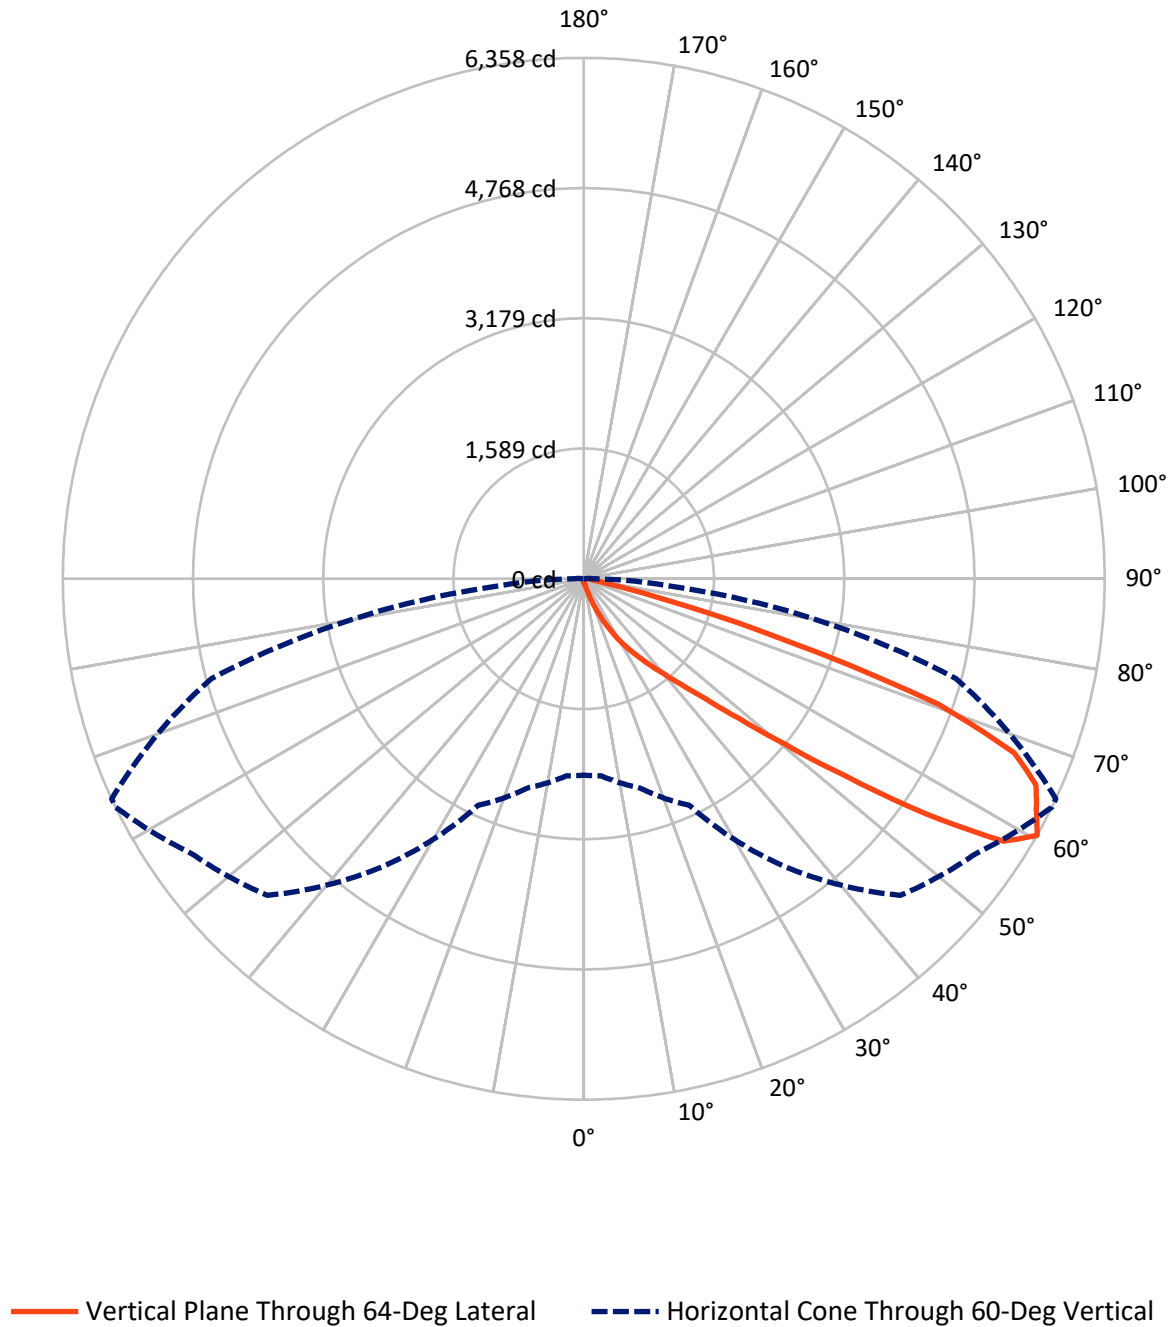

REPORT NUMBER: P1066095

CATALOG NUMBER: NVN-SA1C-760-U-T2BC


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	22.9	0.0	22.9
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	5633.9	0.0	5633.9
	% Fixture	99.6	0.0	99.6
Total	Lumens	5656.9	0.0	5656.9
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	5.6	0.1
10°-20°	55.6	1.0
20°-30°	184.6	3.3
30°-40°	492.6	8.7
40°-50°	1252.2	22.1
50°-60°	1825.4	32.3
60°-70°	1409.9	24.9
70°-80°	387.2	6.8
80°-90°	43.7	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	5656.9	100.0
0°-180°	5656.9	100.0

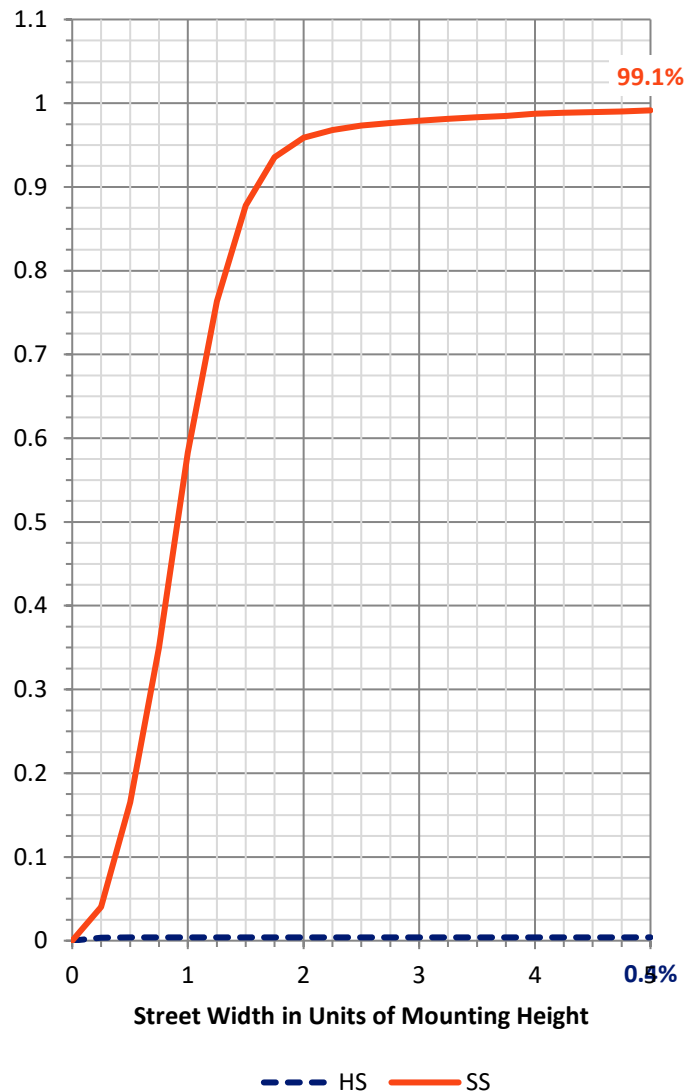

REPORT NUMBER: P1066095


CATALOG NUMBER: NVN-SA1C-760-U-T2BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	240.7	4.3			
FM	(30°-60°)	3562.6	63.0			
FH	(60°-80°)	1788.0	31.6			G1/1800
FVH	(80°-90°)	42.7	0.8			G1/100
BL	(0°-30°)	5.2	0.1	B0/110		
BM	(30°-60°)	7.6	0.1	B0/220		
BH	(60°-80°)	9.2	0.2	B0/110		G0/110
BVH	(80°-90°)	1.0	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type II Short

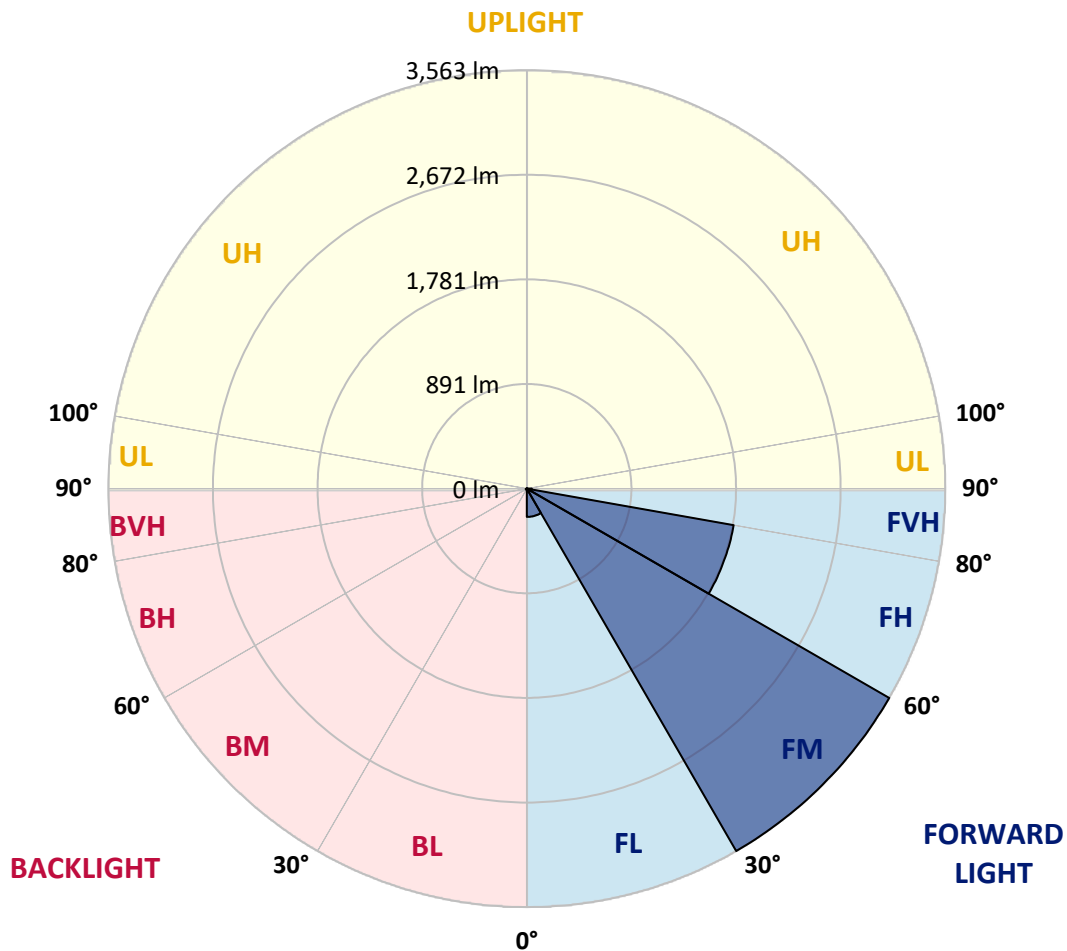

REPORT NUMBER: P1066095

CATALOG NUMBER: NVN-SA1C-760-U-T2BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	64°	65°	75°	85°
0°	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4
2.5°	49.8	49.8	49.8	48.3	46.7	46.7	45.2	43.6	43.6	40.5	38.9
5°	76.3	76.3	73.2	70.1	65.4	59.2	52.9	48.3	48.3	43.6	40.5
7.5°	149.5	154.2	140.1	123.0	99.7	84.1	67.0	56.1	54.5	46.7	40.5
10°	323.9	320.8	299.0	256.9	202.4	146.4	93.4	68.5	65.4	49.8	40.5
12.5°	487.4	492.1	468.7	422.0	356.6	260.0	160.4	88.8	85.6	54.5	40.5
15°	627.5	627.5	612.0	588.6	517.0	415.8	258.5	132.4	121.5	59.2	38.9
17.5°	724.1	722.5	716.3	710.1	668.0	563.7	395.5	211.8	186.9	70.1	38.9
20°	833.1	828.4	836.2	823.7	791.0	708.5	540.3	314.5	291.2	88.8	38.9
22.5°	946.7	951.4	957.6	945.2	909.4	837.7	692.9	446.9	422.0	123.0	40.5
25°	1091.5	1088.4	1102.4	1091.5	1046.4	962.3	836.2	591.7	555.9	171.3	43.6
27.5°	1269.1	1262.8	1272.2	1244.1	1185.0	1099.3	963.9	739.6	697.6	246.0	49.8
30°	1504.2	1508.9	1466.8	1434.1	1350.0	1236.4	1105.6	898.5	854.9	334.8	56.1
32.5°	1874.8	1842.1	1776.7	1644.3	1533.8	1389.0	1247.3	1037.0	998.1	448.5	65.4
35°	2452.5	2458.7	2315.5	1988.5	1748.7	1580.5	1403.0	1189.6	1161.6	577.7	77.9
37.5°	3156.3	3139.2	3013.0	2600.4	2063.2	1818.7	1580.5	1356.3	1315.8	717.8	93.4
40°	3953.6	3881.9	3808.7	3528.5	2718.8	2117.7	1804.7	1549.3	1518.2	879.8	118.3
42.5°	4592.0	4573.3	4585.8	4469.0	3811.9	2626.9	2102.1	1786.0	1748.7	1080.6	161.9
45°	4906.5	4880.0	4954.8	5042.0	4873.8	3710.6	2581.7	2088.1	2038.3	1317.3	228.9
47.5°	4822.4	4803.7	4964.1	5135.4	5359.6	4967.2	3365.0	2539.7	2454.0	1621.0	328.6
50°	4408.2	4409.8	4673.0	4992.2	5347.2	5604.1	4525.0	3157.9	3050.4	2024.3	484.3
52.5°	4004.9	4017.4	4296.1	4761.7	5161.9	5678.9	5543.4	3990.9	3816.5	2499.2	668.0
55°	3590.7	3597.0	3843.0	4498.6	5074.7	5456.2	6066.6	5063.8	4878.5	3090.9	847.1
57.5°	3192.1	3192.1	3284.0	3866.4	4979.7	5435.9	6004.3	6044.8	5893.7	3766.7	979.4
60°	2398.0	2413.6	2642.5	3050.4	4294.6	5465.5	5845.5	6357.8	6357.8	4704.1	1080.6
62.5°	1211.4	1234.8	1519.8	1916.8	2946.1	5057.6	5870.4	6200.5	6225.4	5530.9	1311.1
65°	568.4	594.8	747.4	1027.7	1585.2	3559.6	5611.9	6066.6	6058.8	5373.7	1796.9
67.5°	408.0	415.8	467.1	599.5	853.3	1560.2	4283.7	5666.4	5669.5	4565.5	2066.3
70°	365.9	365.9	378.4	417.3	513.9	697.6	2081.9	4588.9	4811.5	3525.3	1915.3
72.5°	361.3	358.1	355.0	356.6	347.2	350.4	714.7	2591.1	2908.7	2466.5	1527.5
75°	351.9	351.9	348.8	337.9	277.2	225.8	246.0	1047.9	1211.4	1647.4	1133.6
77.5°	278.7	306.8	339.5	319.2	253.8	169.7	143.3	303.6	383.1	1010.6	822.2
80°	129.2	130.8	129.2	135.5	161.9	121.5	105.9	147.9	149.5	560.6	509.2
82.5°	93.4	95.0	90.3	81.0	71.6	65.4	87.2	109.0	116.8	256.9	190.0
85°	28.0	26.5	31.1	42.0	49.8	57.6	73.2	91.9	96.5	95.0	28.0
87.5°	12.5	12.5	15.6	21.8	29.6	43.6	63.8	84.1	85.6	98.1	7.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066095

CATALOG NUMBER: NVN-SA1C-760-U-T2BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4
2.5°	38.9	37.4	35.8	34.3	32.7	31.1	29.6	29.6	31.1	31.1	31.1
5°	37.4	35.8	32.7	29.6	28.0	26.5	24.9	24.9	26.5	26.5	26.5
7.5°	37.4	34.3	31.1	28.0	24.9	23.4	21.8	21.8	21.8	23.4	23.4
10°	37.4	34.3	29.6	24.9	21.8	20.2	18.7	17.1	18.7	18.7	18.7
12.5°	35.8	32.7	28.0	23.4	18.7	15.6	14.0	14.0	14.0	14.0	14.0
15°	34.3	31.1	26.5	20.2	15.6	12.5	9.3	9.3	9.3	10.9	10.9
17.5°	32.7	29.6	23.4	15.6	10.9	7.8	6.2	6.2	6.2	7.8	7.8
20°	32.7	28.0	20.2	12.5	7.8	4.7	3.1	3.1	3.1	4.7	6.2
22.5°	32.7	28.0	18.7	9.3	4.7	3.1	1.6	1.6	1.6	1.6	1.6
25°	32.7	26.5	17.1	7.8	3.1	1.6	0.0	0.0	1.6	3.1	4.7
27.5°	32.7	24.9	14.0	4.7	3.1	1.6	0.0	1.6	3.1	3.1	3.1
30°	32.7	24.9	12.5	4.7	1.6	0.0	0.0	1.6	3.1	3.1	4.7
32.5°	34.3	23.4	10.9	3.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	35.8	21.8	9.3	3.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	38.9	21.8	6.2	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	43.6	23.4	6.2	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	54.5	24.9	4.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	76.3	31.1	4.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	112.1	46.7	4.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	163.5	63.8	3.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	200.9	63.8	3.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	199.3	40.5	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	152.6	28.0	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	129.2	20.2	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	155.7	15.6	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	277.2	14.0	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	445.3	14.0	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	498.3	14.0	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	389.3	12.5	1.6	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	213.3	10.9	1.6	1.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	107.4	7.8	3.1	1.6	1.6	0.0	0.0	0.0	0.0	0.0	0.0
80°	45.2	6.2	3.1	1.6	1.6	1.6	0.0	0.0	0.0	0.0	0.0
82.5°	15.6	6.2	3.1	3.1	1.6	1.6	0.0	0.0	0.0	0.0	0.0
85°	7.8	4.7	4.7	3.1	3.1	1.6	1.6	0.0	0.0	0.0	0.0
87.5°	4.7	4.7	4.7	3.1	3.1	1.6	1.6	0.0	0.0	0.0	1.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-7

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-757-U-5WQ


Data in this report applies to families of products including GSS-SB1A-757-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-7
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-757-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI 5700K CCT 26 LEDS

Spectral Parameters

CCT (K):	5571	CRI (Ra):	69.9		
CIE u':	0.2033	R1:	68.8	R9:	-35.4
CIE v':	0.4806	R2:	72.5	R10:	36.7
Duv:	0.0041	R3:	76.8	R11:	73.9
CIE x:	0.3308	R4:	72.0	R12:	47.8
CIE y:	0.3476	R5:	70.9	R13:	68.0
CIE z:	0.3216	R6:	65.6	R14:	87.0
Peak Wavelength (nm):	442	R7:	75.5	R15:	59.8
Dominant Wavelength (nm):	544	R8:	56.8		
Purity:	3.635698				
Rf:	70.4				
Rg:	97.1				

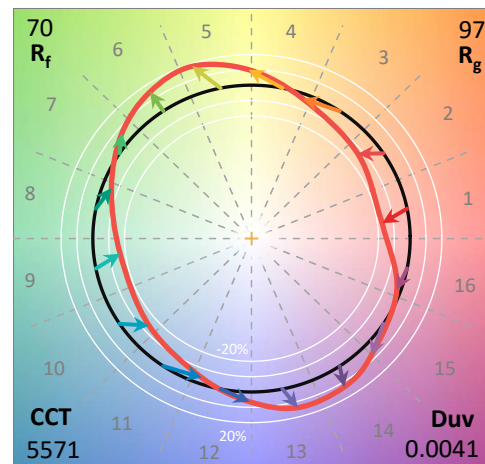

Test Conditions


Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-7

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-7

Photopic Flux vs. Wavelength

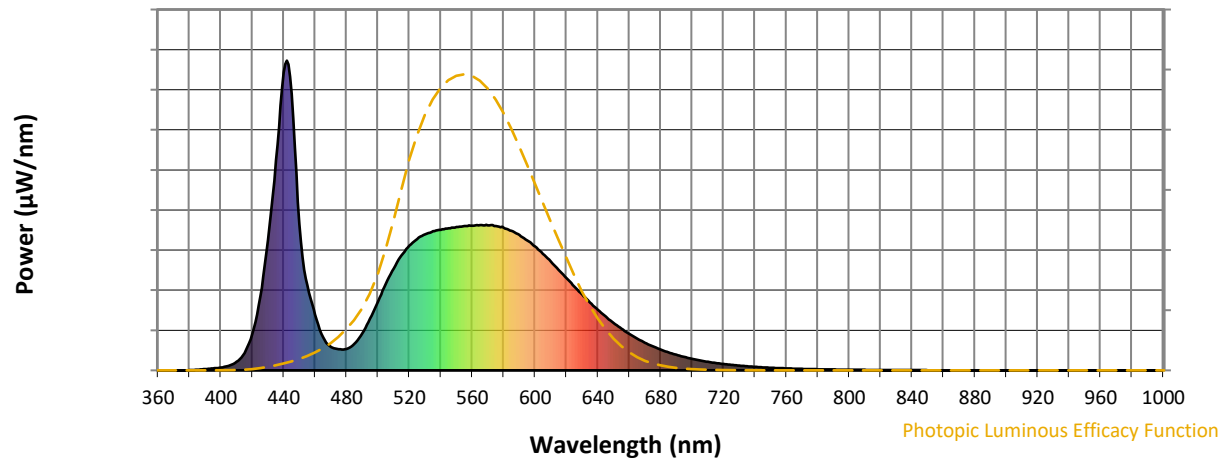


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Scotopic Flux vs. Wavelength

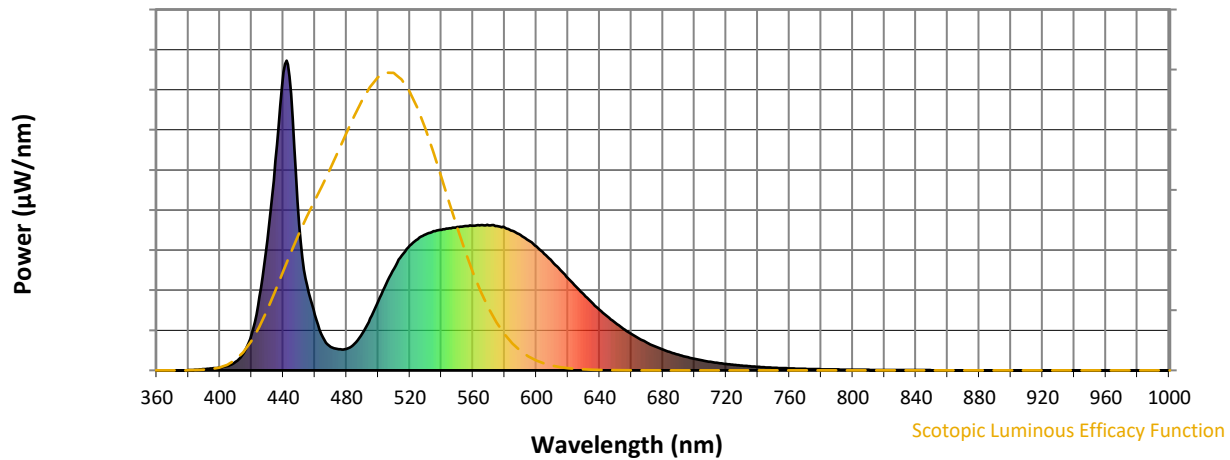


Scotopic Lumens: NR

S/P: 1.84

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Melanopic Flux vs. Wavelength

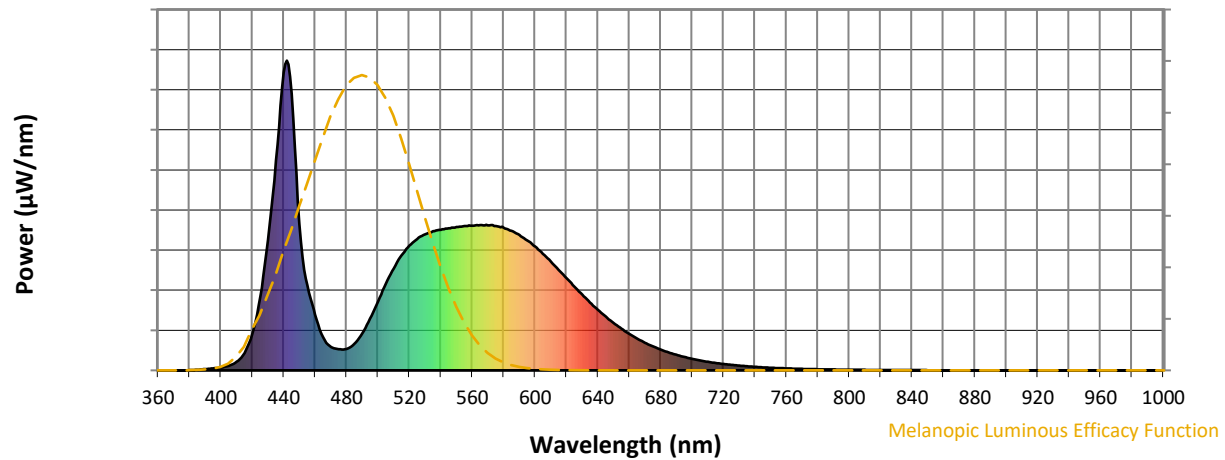

Melanopic Lumens: NR

M/P: 3.71


λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7





TM-30-18

Summary

$R_f = 70.4$
 $R_g = 97.1$
 $CIE\ R_a = 69.9$
 $R_g = -35.4$

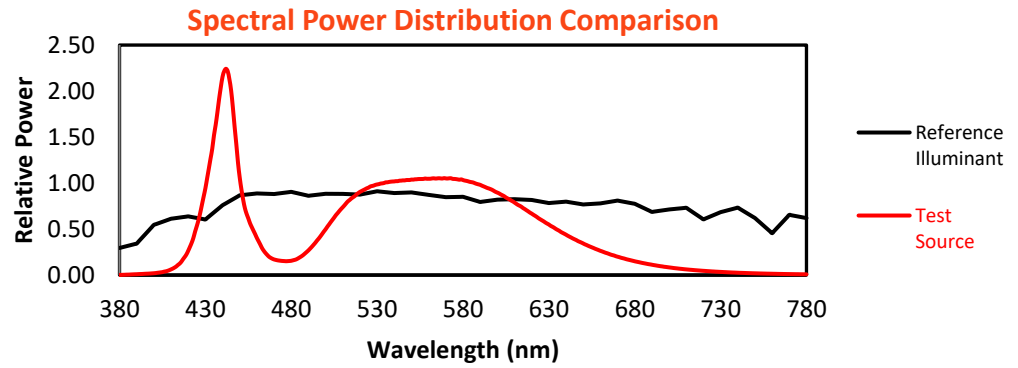


Color Vector Graphics

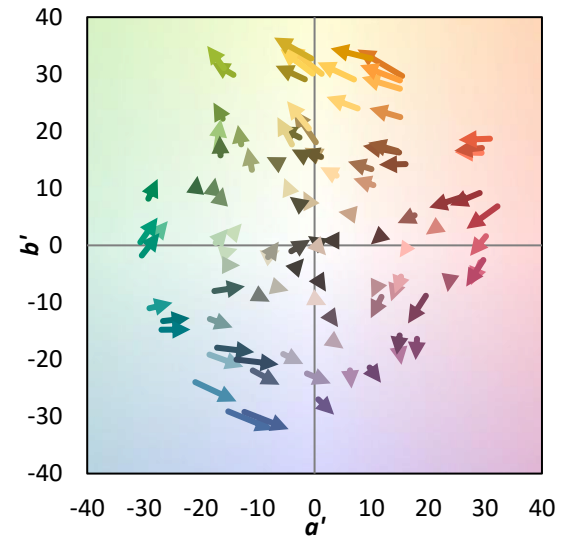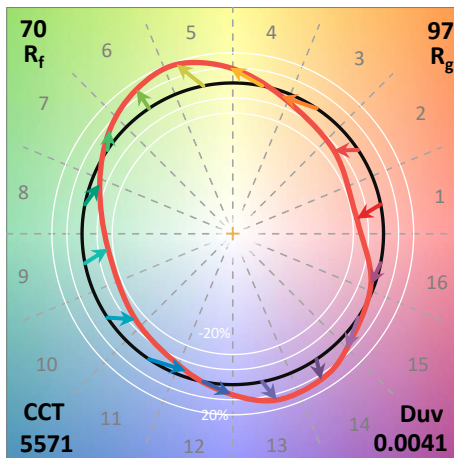
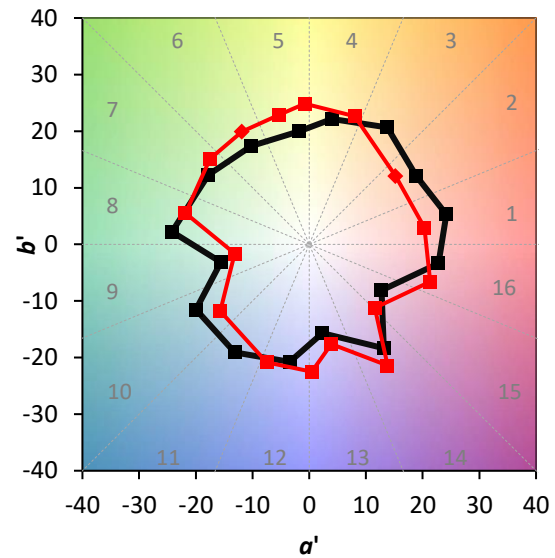
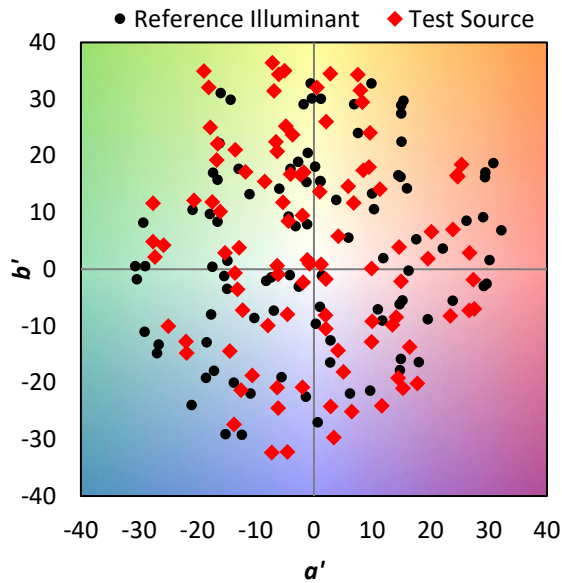


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 52	CES51 = 87	CES76 = 40
CES02 = 59	CES27 = 77	CES52 = 88	CES77 = 62
CES03 = 30	CES28 = 76	CES53 = 74	CES78 = 43
CES04 = 68	CES29 = 46	CES54 = 79	CES79 = 72
CES05 = 45	CES30 = 54	CES55 = 78	CES80 = 68
CES06 = 49	CES31 = 52	CES56 = 67	CES81 = 70
CES07 = 38	CES32 = 49	CES57 = 64	CES82 = 87
CES08 = 37	CES33 = 59	CES58 = 66	CES83 = 81
CES09 = 29	CES34 = 61	CES59 = 87	CES84 = 87
CES10 = 72	CES35 = 78	CES60 = 91	CES85 = 83
CES11 = 55	CES36 = 88	CES61 = 88	CES86 = 75
CES12 = 61	CES37 = 71	CES62 = 77	CES87 = 74
CES13 = 41	CES38 = 64	CES63 = 74	CES88 = 76
CES14 = 74	CES39 = 90	CES64 = 71	CES89 = 75
CES15 = 70	CES40 = 81	CES65 = 63	CES90 = 73
CES16 = 46	CES41 = 82	CES66 = 66	CES91 = 93
CES17 = 48	CES42 = 69	CES67 = 63	CES92 = 69
CES18 = 55	CES43 = 67	CES68 = 71	CES93 = 82
CES19 = 70	CES44 = 98	CES69 = 81	CES94 = 58
CES20 = 63	CES45 = 77	CES70 = 57	CES95 = 72
CES21 = 85	CES46 = 76	CES71 = 54	CES96 = 78
CES22 = 77	CES47 = 73	CES72 = 84	CES97 = 82
CES23 = 91	CES48 = 65	CES73 = 45	CES98 = 70
CES24 = 90	CES49 = 77	CES74 = 92	CES99 = 59
CES25 = 71	CES50 = 85	CES75 = 49	

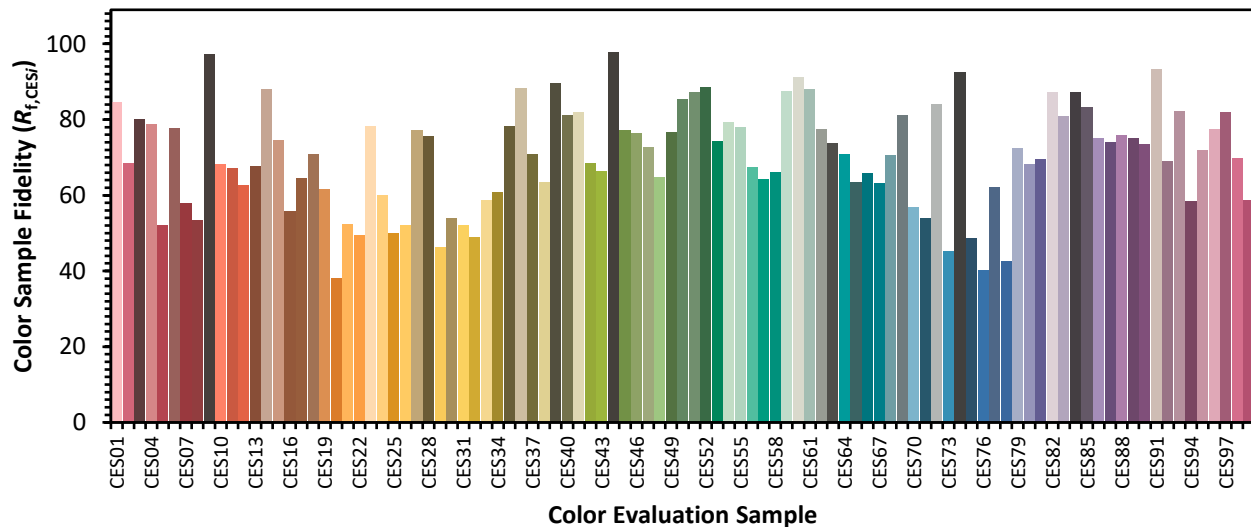

Color Rendition by Hue-Angle Bin

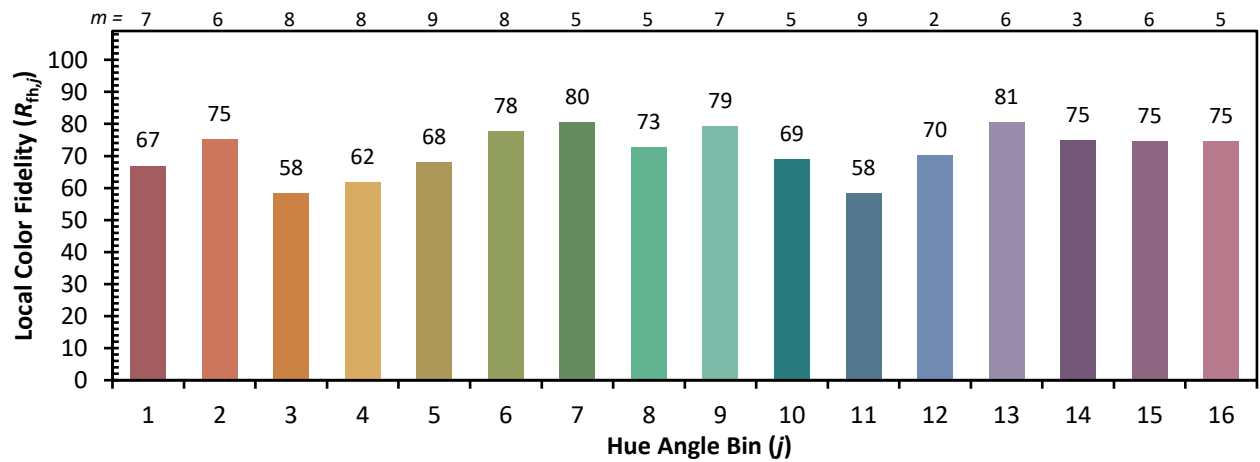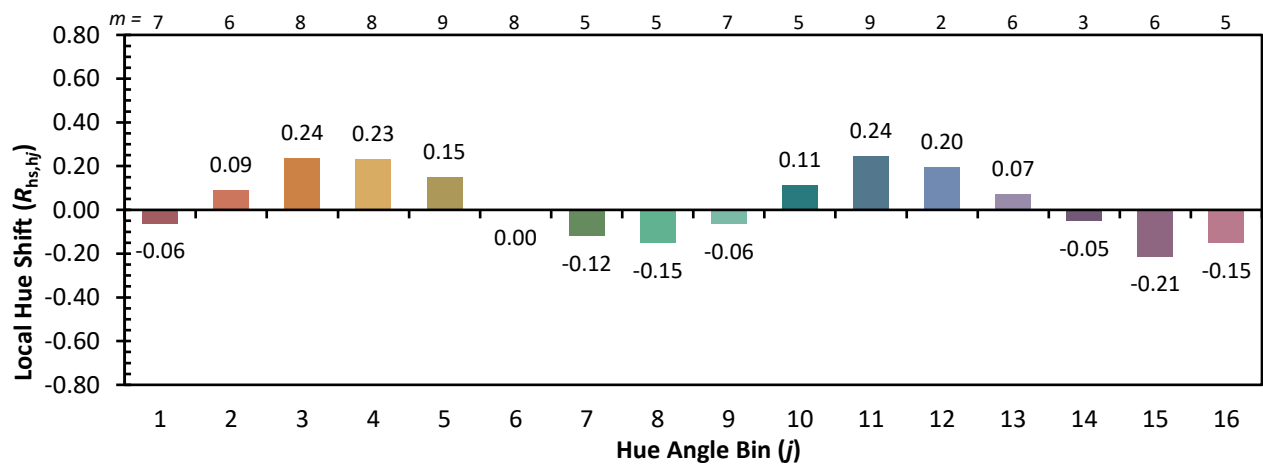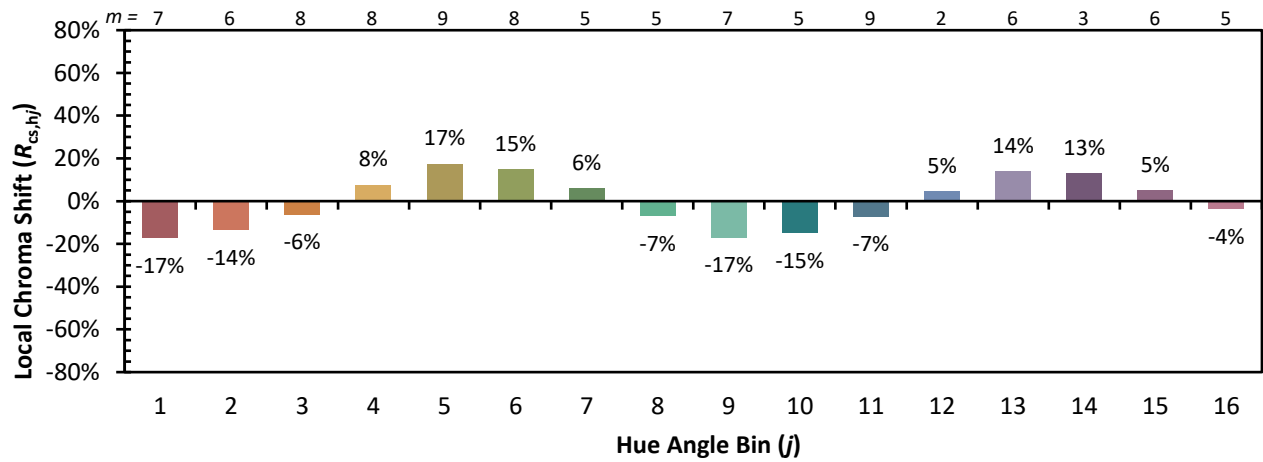

Measure Comparisons

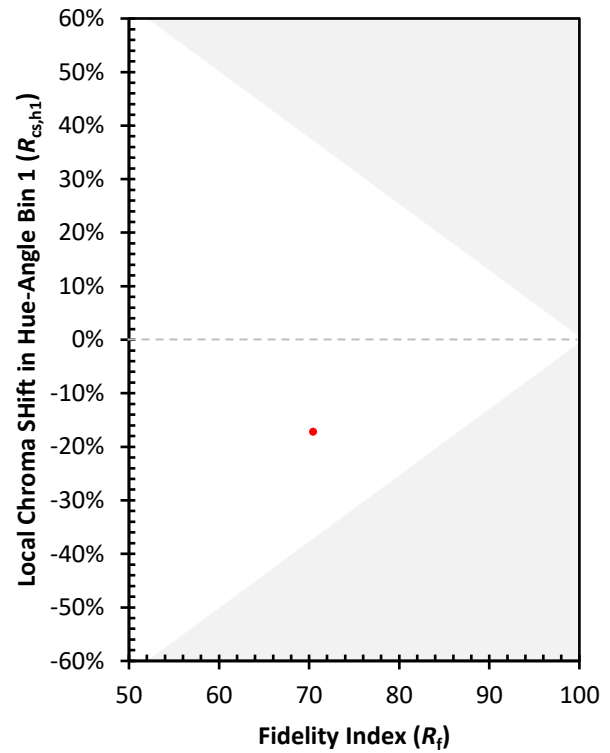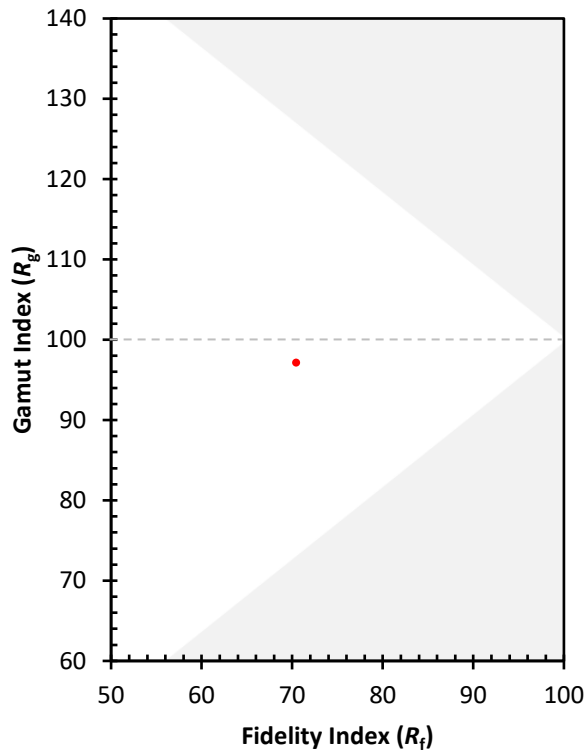

(END OF REPORT)