

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1066834

Luminaire Tested: **NVN-SA6B-760-U-LBC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1066834
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: NVN-SA6B-760-U-LBC
Description: Navion AREA AND ROADWAY LUMINAIRE 800mA 6xLight Square PACKAGE
70CRI 5700K FIXTURE w/ LEFT CORNER BACKLIGHT CONTROL
Light Source: (84) 5700K CCT, 70 CRI LEDs
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 23070.8 lumens
Efficiency: N/A
Efficacy: 109.3 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1.5' x H: 0')
IES Classification: Type III - Short
BUG Rating: B0 - U0 - G4

Input Watts (W): 211
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1066834

CATALOG NUMBER: NVN-SA6B-760-U-LBC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

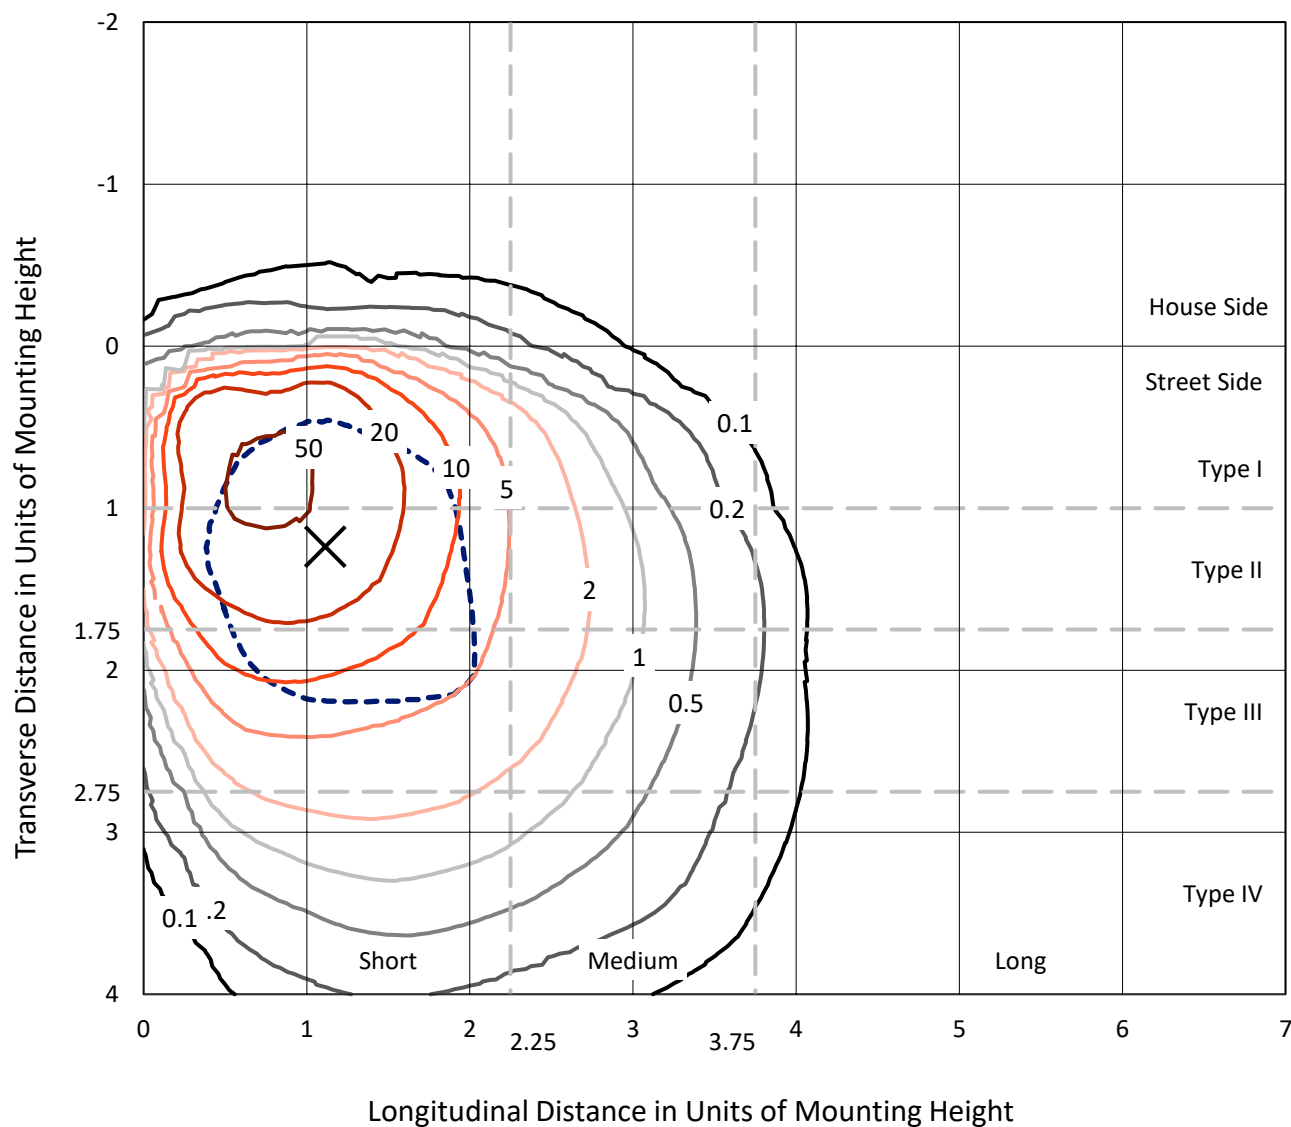


Based on 15 foot mounting height. Maximum calculated value = 68.5 fc
 Type III - Short - N/A

REPORT NUMBER: P1066834

CATALOG NUMBER: NVN-SA6B-760-U-LBC

Luminous Intensity Polar Plot

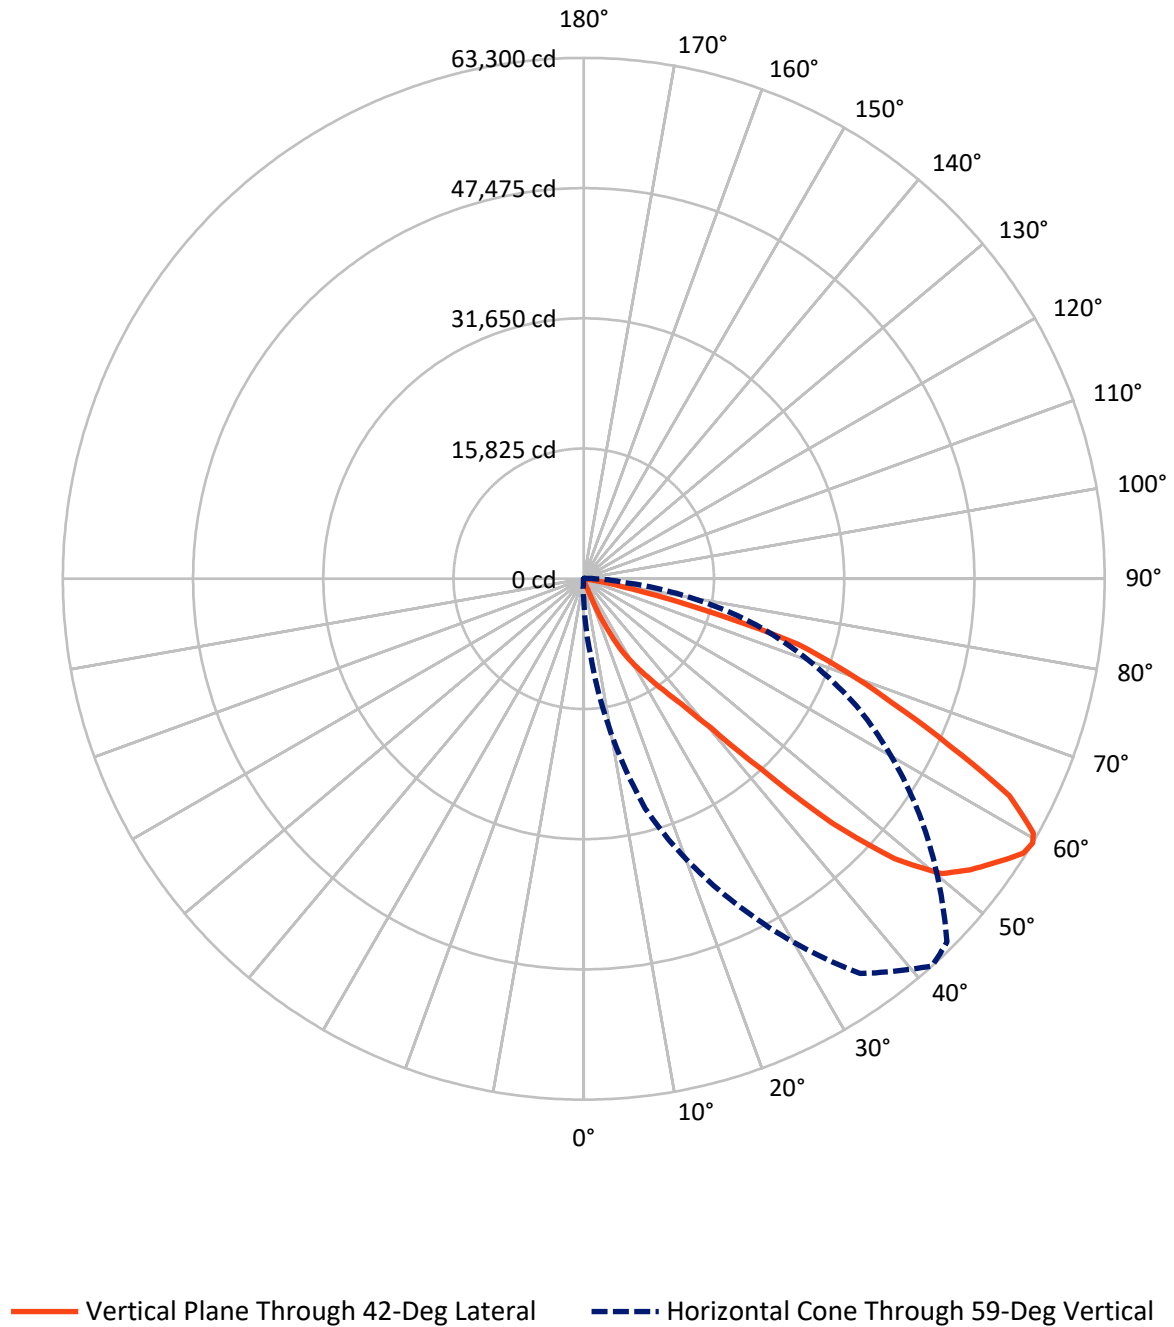

REPORT NUMBER: P1066834

CATALOG NUMBER: NVN-SA6B-760-U-LBC

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	111.2	0.0	111.2
	% Fixture	0.5	0.0	0.5
Street Side	Lumens	22959.6	0.0	22959.6
	% Fixture	99.5	0.0	99.5
Total	Lumens	23070.8	0.0	23070.8
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	6.8	0.0
10°-20°	33.6	0.1
20°-30°	430.3	1.9
30°-40°	1450.9	6.3
40°-50°	4382.2	19.0
50°-60°	7735.7	33.5
60°-70°	6811.4	29.5
70°-80°	2168.1	9.4
80°-90°	51.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	23070.8	100.0
0°-180°	23070.8	100.0



REPORT NUMBER: P1066834


CATALOG NUMBER: NVN-SA6B-760-U-LBC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	458.3	2.0			
FM	(30°-60°)	13523.3	58.6			
FH	(60°-80°)	8928.6	38.7			G4/12000
FVH	(80°-90°)	49.4	0.2			G1/100
BL	(0°-30°)	12.4	0.1	B0/110		
BM	(30°-60°)	45.4	0.2	B0/220		
BH	(60°-80°)	50.8	0.2	B0/110		G0/110
BVH	(80°-90°)	2.5	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G4

Type III Short

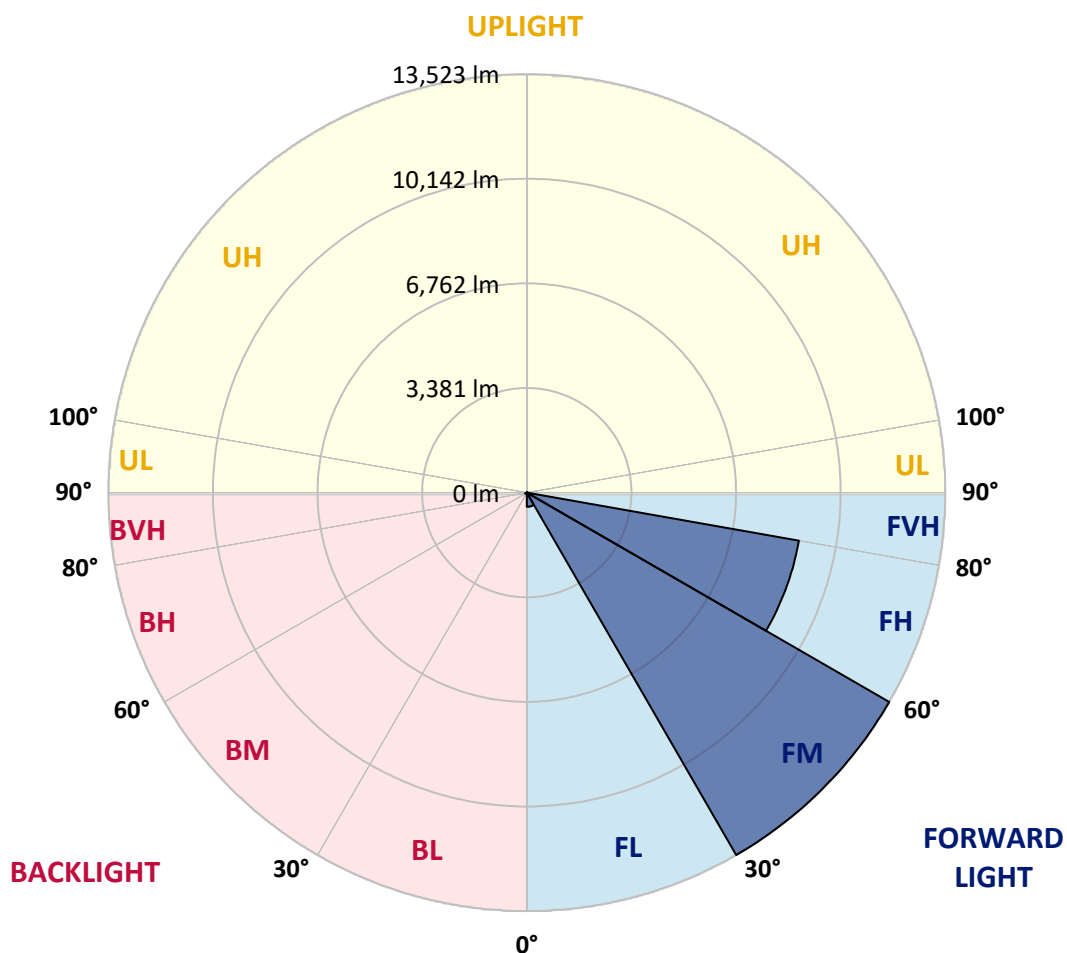

REPORT NUMBER: P1066834

CATALOG NUMBER: NVN-SA6B-760-U-LBC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	42°	45°	55°	65°	75°	85°
0°	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1
2.5°	101.3	101.3	94.0	86.8	79.6	72.3	72.3	72.3	65.1	65.1	57.9
5°	115.7	115.7	108.5	101.3	101.3	94.0	94.0	86.8	79.6	79.6	72.3
7.5°	123.0	123.0	123.0	123.0	115.7	115.7	115.7	108.5	101.3	94.0	86.8
10°	130.2	137.4	144.7	144.7	144.7	144.7	144.7	137.4	123.0	115.7	101.3
12.5°	144.7	151.9	166.4	180.8	180.8	188.1	180.8	173.6	159.1	137.4	115.7
15°	159.1	173.6	195.3	224.2	253.2	260.4	260.4	238.7	209.8	166.4	137.4
17.5°	180.8	202.5	260.4	354.4	455.7	535.3	535.3	477.4	332.7	217.0	159.1
20°	195.3	238.7	419.5	853.5	1302.0	1634.8	1569.7	1388.8	745.0	340.0	173.6
22.5°	217.0	303.8	889.7	2242.4	3472.1	4079.7	3935.0	2987.4	1670.9	607.6	209.8
25°	245.9	441.2	1765.0	4202.6	6452.2	7110.5	7016.5	5577.0	3045.3	1019.9	267.6
27.5°	303.8	651.0	2828.3	6372.7	9519.2	10083.4	10047.3	8166.6	4868.1	1642.0	347.2
30°	383.4	947.6	4195.4	8658.5	11551.8	12123.3	11942.4	10061.7	6568.0	2510.0	448.5
32.5°	477.4	1323.7	5432.3	10343.9	13425.3	14177.6	13960.6	11711.0	7935.1	3247.8	665.5
35°	622.1	1692.6	6654.8	11833.9	15588.1	16542.9	16181.3	13410.8	9114.2	4079.7	802.9
37.5°	694.4	1909.6	7776.0	13454.2	18018.6	19320.6	19045.7	15559.2	10314.9	5143.0	983.8
40°	701.6	2170.0	8940.6	15566.4	21454.4	23776.4	23284.5	19248.2	12550.1	6510.1	1265.9
42.5°	723.3	2560.6	10452.4	19168.7	28203.3	31537.9	30980.9	26033.2	17620.7	9251.6	1793.9
45°	824.6	3298.5	13533.8	25903.0	37469.3	42359.2	41715.4	35487.4	24702.3	14409.1	3059.8
47.5°	1179.1	4962.2	18937.2	33172.7	46945.2	50844.0	50684.9	42937.8	31118.4	19696.7	5186.4
50°	1895.2	7616.8	25085.6	39284.9	52977.9	56327.0	55929.1	46048.2	34778.5	23306.2	6647.6
52.5°	2531.7	10155.8	28948.3	41534.5	54779.0	58771.9	58287.2	47183.9	35740.5	24369.5	7052.6
55°	2690.8	11074.4	30098.4	42229.0	55972.5	60840.7	60139.0	47943.4	35863.5	23610.0	6379.9
57.5°	2611.3	10206.4	29353.4	42908.9	57636.2	62967.3	62034.2	49426.2	36275.8	22322.5	5309.4
59°	2473.8	9135.9	28890.4	43451.4	58554.9	63300.0	62424.8	49751.8	36550.7	21736.6	4658.3
60°	2314.7	8412.5	28528.8	43805.8	58497.0	62779.2	61875.0	49599.9	36659.2	21230.2	4347.3
62.5°	1786.7	6712.7	28008.0	43552.7	54844.1	58026.8	57513.3	45881.9	35067.8	19609.9	3428.7
65°	1388.8	5135.8	26098.3	38843.7	46670.3	48811.4	48652.3	38850.9	29512.5	16904.6	2473.8
67.5°	1099.5	3746.9	22069.3	31458.3	37548.9	40594.2	40478.5	31537.9	22402.0	12919.0	1779.4
70°	896.9	2669.1	15132.4	23718.5	30033.3	33867.1	33700.7	25382.2	16600.8	8195.5	1294.8
72.5°	759.5	1707.1	9179.3	17881.1	25063.9	27255.7	26771.0	20477.9	12072.6	4463.0	1027.2
75°	643.8	1048.9	4549.8	11146.8	14929.9	14915.4	14430.8	10843.0	6481.2	2184.5	817.4
77.5°	520.8	737.8	1786.7	3059.8	4709.0	5830.2	5736.1	3841.0	1938.6	636.5	506.3
80°	340.0	347.2	477.4	839.1	1294.8	1432.2	1627.5	1171.8	564.2	303.8	209.8
82.5°	151.9	166.4	217.0	274.9	274.9	253.2	224.2	166.4	123.0	101.3	50.6
85°	36.2	50.6	36.2	43.4	36.2	28.9	28.9	14.5	0.0	0.0	0.0
87.5°	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066834

CATALOG NUMBER: NVN-SA6B-760-U-LBC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1
2.5°	57.9	57.9	57.9	50.6	50.6	50.6	43.4	43.4	43.4	36.2	36.2
5°	72.3	65.1	57.9	57.9	50.6	50.6	43.4	36.2	36.2	36.2	28.9
7.5°	79.6	72.3	65.1	57.9	50.6	43.4	43.4	36.2	28.9	28.9	28.9
10°	94.0	86.8	72.3	57.9	50.6	43.4	36.2	36.2	28.9	21.7	21.7
12.5°	108.5	94.0	79.6	65.1	50.6	43.4	36.2	36.2	28.9	21.7	14.5
15°	123.0	108.5	86.8	65.1	50.6	43.4	36.2	36.2	21.7	14.5	7.2
17.5°	137.4	115.7	86.8	72.3	50.6	43.4	36.2	28.9	14.5	7.2	0.0
20°	144.7	123.0	94.0	72.3	50.6	43.4	36.2	21.7	7.2	0.0	0.0
22.5°	159.1	137.4	101.3	72.3	50.6	36.2	21.7	7.2	0.0	0.0	0.0
25°	188.1	144.7	101.3	72.3	50.6	36.2	14.5	0.0	0.0	0.0	0.0
27.5°	209.8	159.1	101.3	72.3	50.6	28.9	7.2	0.0	0.0	0.0	0.0
30°	245.9	173.6	108.5	72.3	50.6	21.7	7.2	0.0	0.0	0.0	0.0
32.5°	303.8	188.1	108.5	72.3	43.4	21.7	0.0	0.0	0.0	0.0	0.0
35°	368.9	217.0	108.5	72.3	43.4	21.7	0.0	0.0	0.0	0.0	0.0
37.5°	376.1	231.5	108.5	72.3	43.4	14.5	0.0	0.0	0.0	0.0	0.0
40°	390.6	217.0	115.7	72.3	43.4	14.5	0.0	0.0	0.0	0.0	0.0
42.5°	448.5	202.5	123.0	72.3	43.4	14.5	0.0	0.0	0.0	0.0	0.0
45°	665.5	209.8	123.0	79.6	43.4	21.7	0.0	0.0	0.0	0.0	0.0
47.5°	1157.4	217.0	115.7	79.6	43.4	21.7	0.0	0.0	0.0	0.0	0.0
50°	1482.9	253.2	115.7	86.8	50.6	14.5	0.0	0.0	0.0	0.0	0.0
52.5°	1576.9	296.6	115.7	94.0	65.1	7.2	0.0	0.0	0.0	0.0	0.0
55°	1533.5	347.2	123.0	101.3	79.6	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	1417.8	376.1	130.2	108.5	86.8	0.0	0.0	0.0	0.0	0.0	0.0
59°	1294.8	397.8	151.9	115.7	86.8	0.0	0.0	0.0	0.0	0.0	0.0
60°	1193.5	419.5	159.1	123.0	86.8	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	962.1	448.5	173.6	144.7	72.3	0.0	0.0	0.0	0.0	0.0	0.0
65°	839.1	470.2	180.8	159.1	65.1	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	766.7	484.6	195.3	166.4	57.9	0.0	0.0	0.0	0.0	0.0	0.0
70°	708.9	477.4	209.8	159.1	50.6	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	643.8	455.7	253.2	144.7	43.4	0.0	0.0	0.0	0.0	0.0	0.0
75°	578.7	412.3	274.9	130.2	28.9	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	419.5	347.2	253.2	115.7	14.5	0.0	0.0	0.0	0.0	0.0	0.0
80°	180.8	188.1	180.8	86.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	36.2	43.4	36.2	21.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066834

CATALOG NUMBER: NVN-SA6B-760-U-LBC

CANDELA DISTRIBUTION (continued):

	185°	195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
0°	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1
2.5°	36.2	36.2	36.2	36.2	43.4	43.4	57.9	72.3	86.8	94.0	94.0
5°	28.9	28.9	28.9	28.9	28.9	36.2	43.4	57.9	79.6	86.8	86.8
7.5°	21.7	21.7	21.7	21.7	21.7	21.7	36.2	50.6	72.3	79.6	86.8
10°	21.7	14.5	14.5	7.2	7.2	14.5	21.7	43.4	65.1	72.3	79.6
12.5°	14.5	7.2	7.2	0.0	0.0	7.2	14.5	36.2	57.9	65.1	72.3
15°	7.2	0.0	0.0	0.0	0.0	0.0	7.2	28.9	50.6	57.9	72.3
17.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21.7	43.4	57.9	65.1
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.5	36.2	50.6	57.9
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	28.9	43.4	50.6
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21.7	28.9	36.2
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.5	21.7	28.9
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.5	21.7	28.9
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5	21.7
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5	21.7
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5	14.5
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	7.2
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	7.2
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2
59°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	7.2
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	14.5
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	7.2
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	7.2
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.2	7.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066834

CATALOG NUMBER: NVN-SA6B-760-U-LBC

CANDELA DISTRIBUTION (continued):

	285°	295°	305°	315°	318°	325°	335°	345°	355°	360°
0°	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1
2.5°	101.3	101.3	94.0	86.8	86.8	86.8	94.0	101.3	101.3	101.3
5°	94.0	94.0	86.8	86.8	86.8	86.8	94.0	108.5	115.7	115.7
7.5°	94.0	94.0	86.8	86.8	86.8	86.8	94.0	108.5	115.7	123.0
10°	86.8	86.8	86.8	86.8	79.6	86.8	94.0	108.5	130.2	130.2
12.5°	86.8	86.8	86.8	86.8	79.6	86.8	101.3	115.7	137.4	144.7
15°	86.8	86.8	86.8	79.6	79.6	86.8	101.3	123.0	144.7	159.1
17.5°	79.6	86.8	86.8	79.6	79.6	86.8	101.3	123.0	159.1	180.8
20°	72.3	79.6	86.8	79.6	79.6	79.6	101.3	123.0	166.4	195.3
22.5°	65.1	72.3	79.6	79.6	72.3	79.6	101.3	130.2	180.8	217.0
25°	57.9	65.1	65.1	72.3	72.3	79.6	101.3	130.2	188.1	245.9
27.5°	43.4	50.6	57.9	65.1	65.1	79.6	101.3	137.4	202.5	303.8
30°	36.2	43.4	50.6	57.9	65.1	79.6	101.3	137.4	217.0	383.4
32.5°	36.2	43.4	50.6	57.9	65.1	72.3	101.3	144.7	238.7	477.4
35°	28.9	36.2	43.4	57.9	57.9	72.3	101.3	144.7	260.4	622.1
37.5°	28.9	36.2	43.4	57.9	57.9	72.3	101.3	144.7	318.3	694.4
40°	21.7	28.9	36.2	57.9	57.9	72.3	108.5	151.9	325.5	701.6
42.5°	21.7	28.9	36.2	50.6	57.9	72.3	108.5	151.9	303.8	723.3
45°	21.7	28.9	36.2	57.9	65.1	79.6	108.5	159.1	296.6	824.6
47.5°	21.7	28.9	36.2	57.9	72.3	79.6	108.5	159.1	303.8	1179.1
50°	21.7	28.9	36.2	57.9	79.6	79.6	108.5	159.1	332.7	1895.2
52.5°	14.5	21.7	28.9	50.6	65.1	86.8	115.7	151.9	354.4	2531.7
55°	14.5	14.5	21.7	43.4	57.9	94.0	123.0	151.9	412.3	2690.8
57.5°	14.5	14.5	21.7	36.2	50.6	101.3	130.2	151.9	477.4	2611.3
59°	14.5	14.5	14.5	36.2	43.4	101.3	130.2	159.1	484.6	2473.8
60°	14.5	14.5	14.5	28.9	43.4	101.3	137.4	166.4	491.9	2314.7
62.5°	7.2	7.2	7.2	28.9	36.2	101.3	151.9	202.5	506.3	1786.7
65°	14.5	14.5	7.2	21.7	36.2	86.8	173.6	217.0	513.6	1388.8
67.5°	14.5	14.5	14.5	28.9	36.2	86.8	180.8	224.2	513.6	1099.5
70°	14.5	14.5	14.5	28.9	43.4	86.8	180.8	231.5	506.3	896.9
72.5°	14.5	14.5	14.5	28.9	43.4	79.6	166.4	238.7	484.6	759.5
75°	14.5	14.5	14.5	21.7	36.2	72.3	159.1	260.4	441.2	643.8
77.5°	14.5	14.5	14.5	14.5	28.9	57.9	144.7	289.3	390.6	520.8
80°	21.7	14.5	14.5	14.5	21.7	50.6	137.4	282.1	325.5	340.0
82.5°	21.7	14.5	14.5	7.2	14.5	36.2	108.5	217.0	166.4	151.9
85°	14.5	14.5	14.5	7.2	7.2	21.7	50.6	65.1	50.6	36.2
87.5°	14.5	14.5	14.5	7.2	7.2	7.2	7.2	7.2	7.2	7.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-7

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-757-U-5WQ

Data in this report applies to families of products including GSS-SB1A-757-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-7
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-757-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI
 5700K CCT 26 LEDS

Spectral Parameters

CCT (K):	5571	CRI (Ra):	69.9		
CIE u':	0.2033	R1:	68.8	R9:	-35.4
CIE v':	0.4806	R2:	72.5	R10:	36.7
Duv:	0.0041	R3:	76.8	R11:	73.9
CIE x:	0.3308	R4:	72.0	R12:	47.8
CIE y:	0.3476	R5:	70.9	R13:	68.0
CIE z:	0.3216	R6:	65.6	R14:	87.0
Peak Wavelength (nm):	442	R7:	75.5	R15:	59.8
Dominant Wavelength (nm):	544	R8:	56.8		
Purity:	3.635698				
Rf:	70.4				
Rg:	97.1				



Test Conditions

Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-7

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-7

CIE 1931 Chromaticity Diagram




CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5700K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-7

Photopic Flux vs. Wavelength

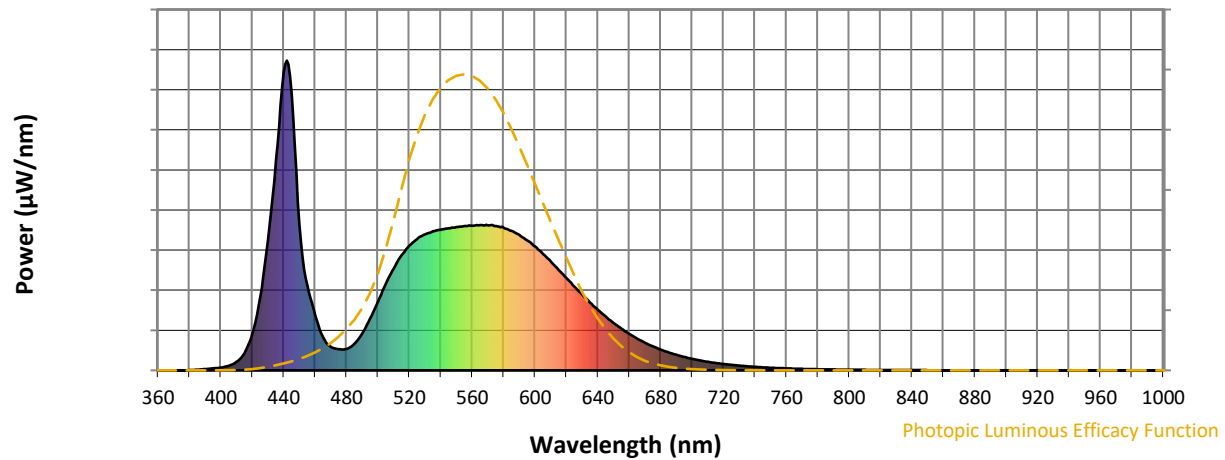

Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Scotopic Flux vs. Wavelength




Scotopic Lumens: NR

S/P: 1.84

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Melanopic Flux vs. Wavelength

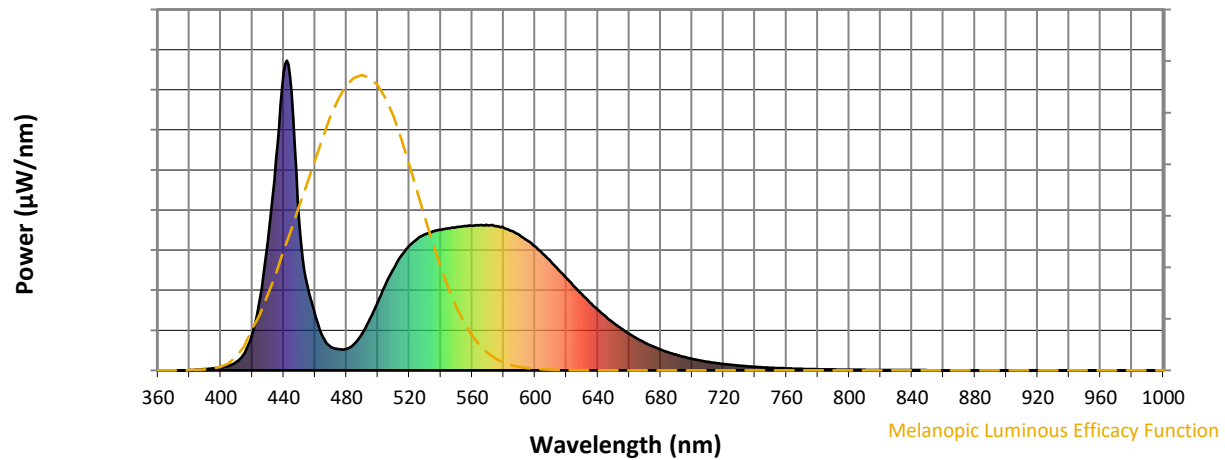
Melanopic Lumens: NR
M/P: 3.71

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7




TM-30-18

Summary

$R_f = 70.4$
 $R_g = 97.1$
 $CIE R_a = 69.9$
 $R_g = -35.4$




Color Vector Graphics

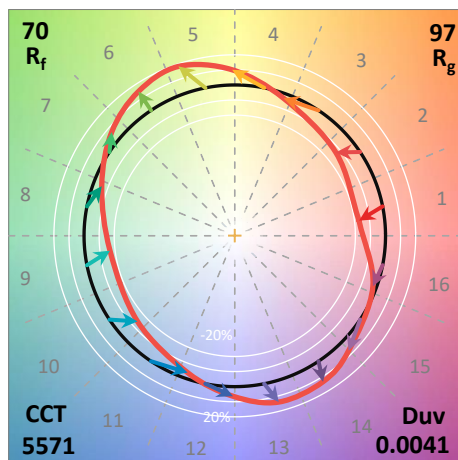
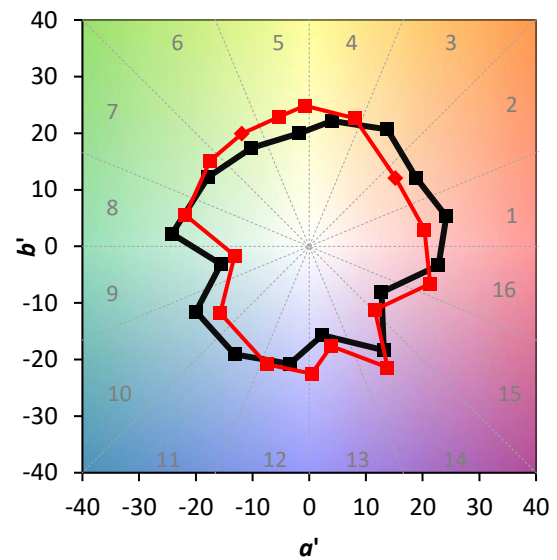
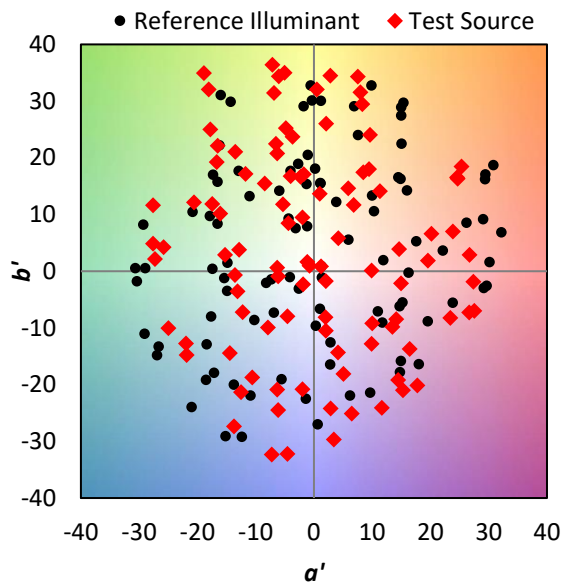


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 52	CES51 = 87	CES76 = 40
CES02 = 59	CES27 = 77	CES52 = 88	CES77 = 62
CES03 = 30	CES28 = 76	CES53 = 74	CES78 = 43
CES04 = 68	CES29 = 46	CES54 = 79	CES79 = 72
CES05 = 45	CES30 = 54	CES55 = 78	CES80 = 68
CES06 = 49	CES31 = 52	CES56 = 67	CES81 = 70
CES07 = 38	CES32 = 49	CES57 = 64	CES82 = 87
CES08 = 37	CES33 = 59	CES58 = 66	CES83 = 81
CES09 = 29	CES34 = 61	CES59 = 87	CES84 = 87
CES10 = 72	CES35 = 78	CES60 = 91	CES85 = 83
CES11 = 55	CES36 = 88	CES61 = 88	CES86 = 75
CES12 = 61	CES37 = 71	CES62 = 77	CES87 = 74
CES13 = 41	CES38 = 64	CES63 = 74	CES88 = 76
CES14 = 74	CES39 = 90	CES64 = 71	CES89 = 75
CES15 = 70	CES40 = 81	CES65 = 63	CES90 = 73
CES16 = 46	CES41 = 82	CES66 = 66	CES91 = 93
CES17 = 48	CES42 = 69	CES67 = 63	CES92 = 69
CES18 = 55	CES43 = 67	CES68 = 71	CES93 = 82
CES19 = 70	CES44 = 98	CES69 = 81	CES94 = 58
CES20 = 63	CES45 = 77	CES70 = 57	CES95 = 72
CES21 = 85	CES46 = 76	CES71 = 54	CES96 = 78
CES22 = 77	CES47 = 73	CES72 = 84	CES97 = 82
CES23 = 91	CES48 = 65	CES73 = 45	CES98 = 70
CES24 = 90	CES49 = 77	CES74 = 92	CES99 = 59
CES25 = 71	CES50 = 85	CES75 = 49	

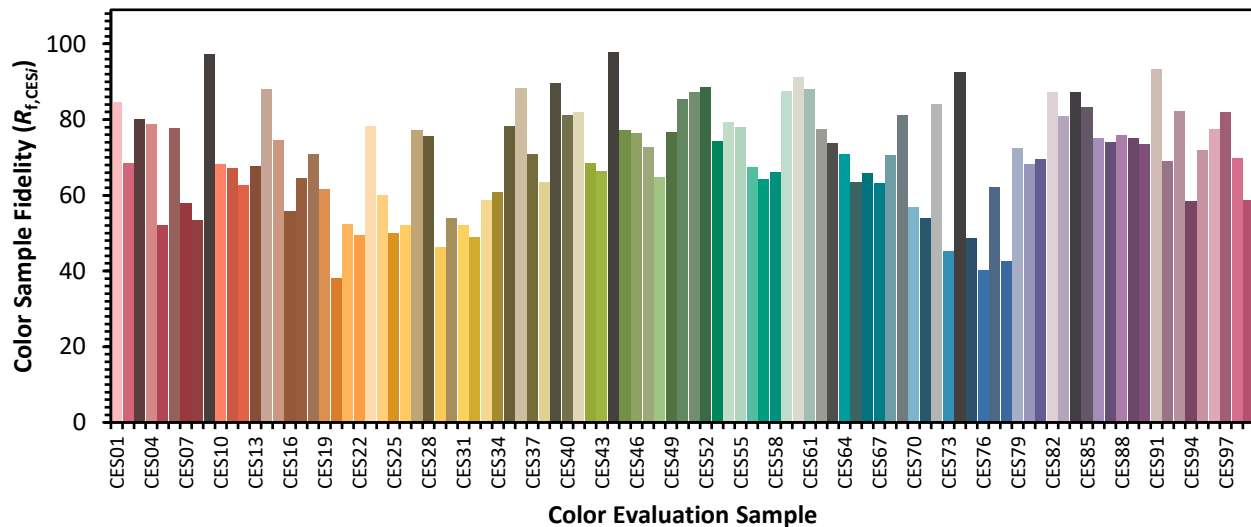

Color Rendition by Hue-Angle Bin

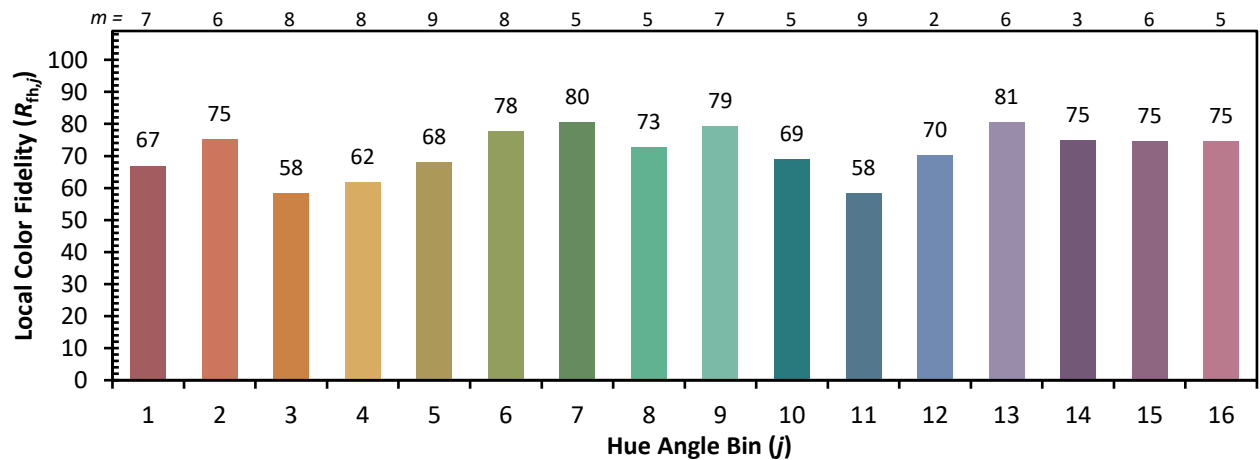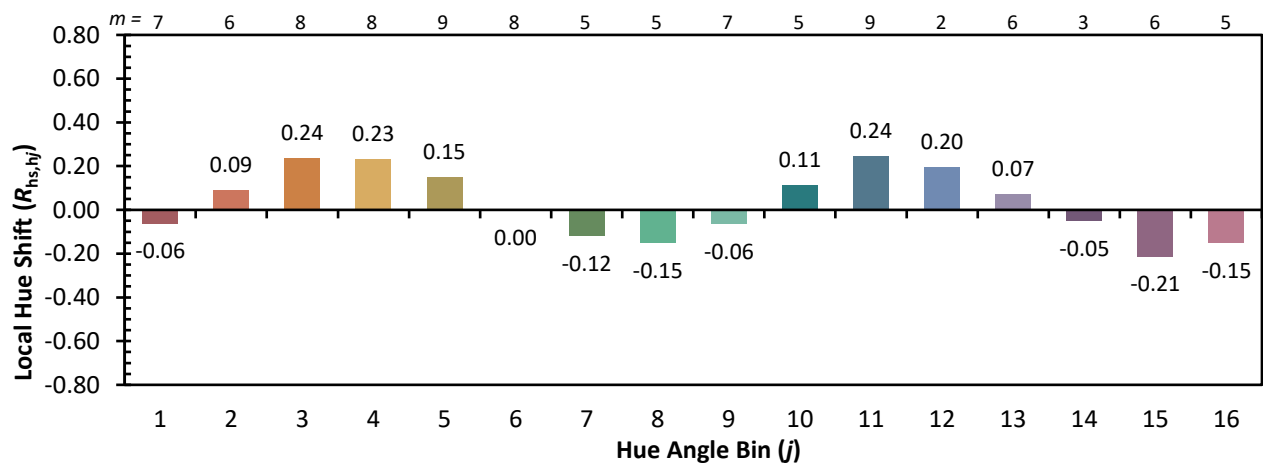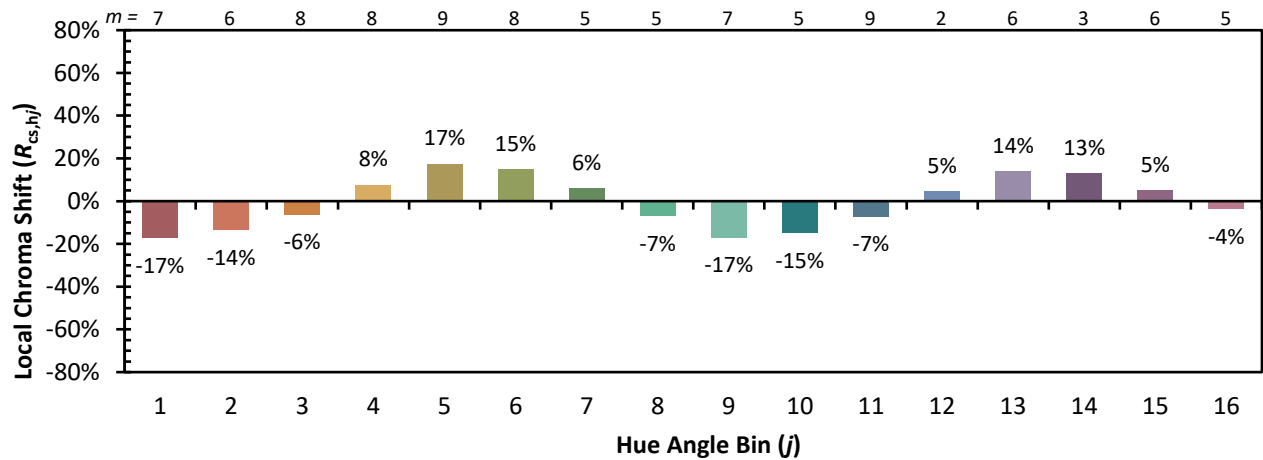

Measure Comparisons

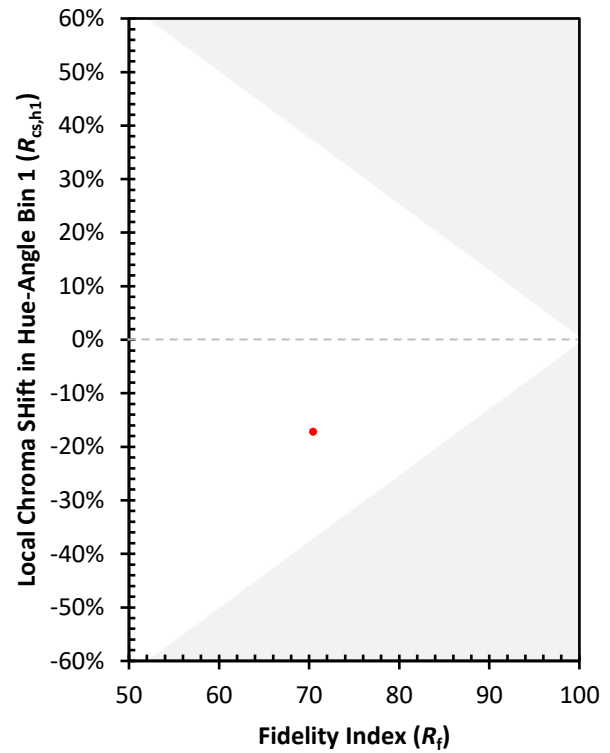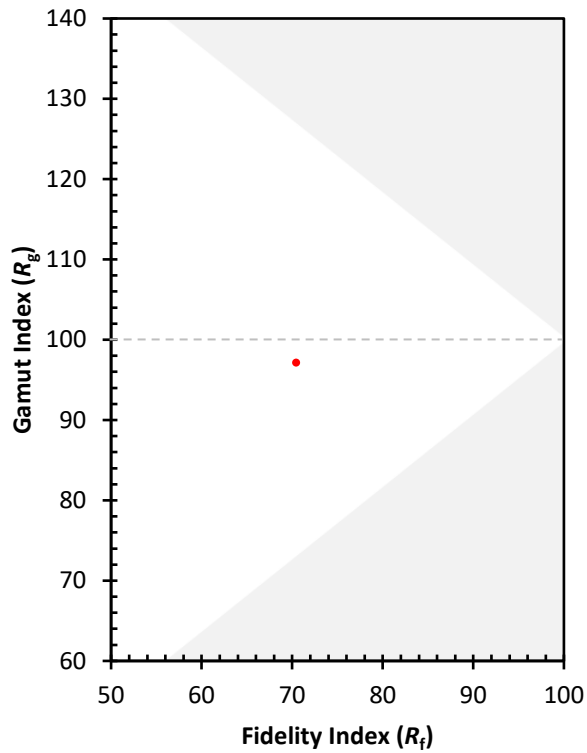

(END OF REPORT)