

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1066114

Luminaire Tested: **NVN-SA6B-760-U-T2BC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1066114
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: NVN-SA6B-760-U-T2BC
Description: Navion AREA AND ROADWAY LUMINAIRE 800mA 6xLight Square PACKAGE
70CRI 5700K FIXTURE w/ TYPE II ANGLED BACKLIGHT CONTROL
Light Source: (84) 5700K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 26302.2 lumens
Efficiency: N/A
Efficacy: 124.7 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B0 - U0 - G4

Input Watts (W): 211
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1066114

CATALOG NUMBER: NVN-SA6B-760-U-T2BC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

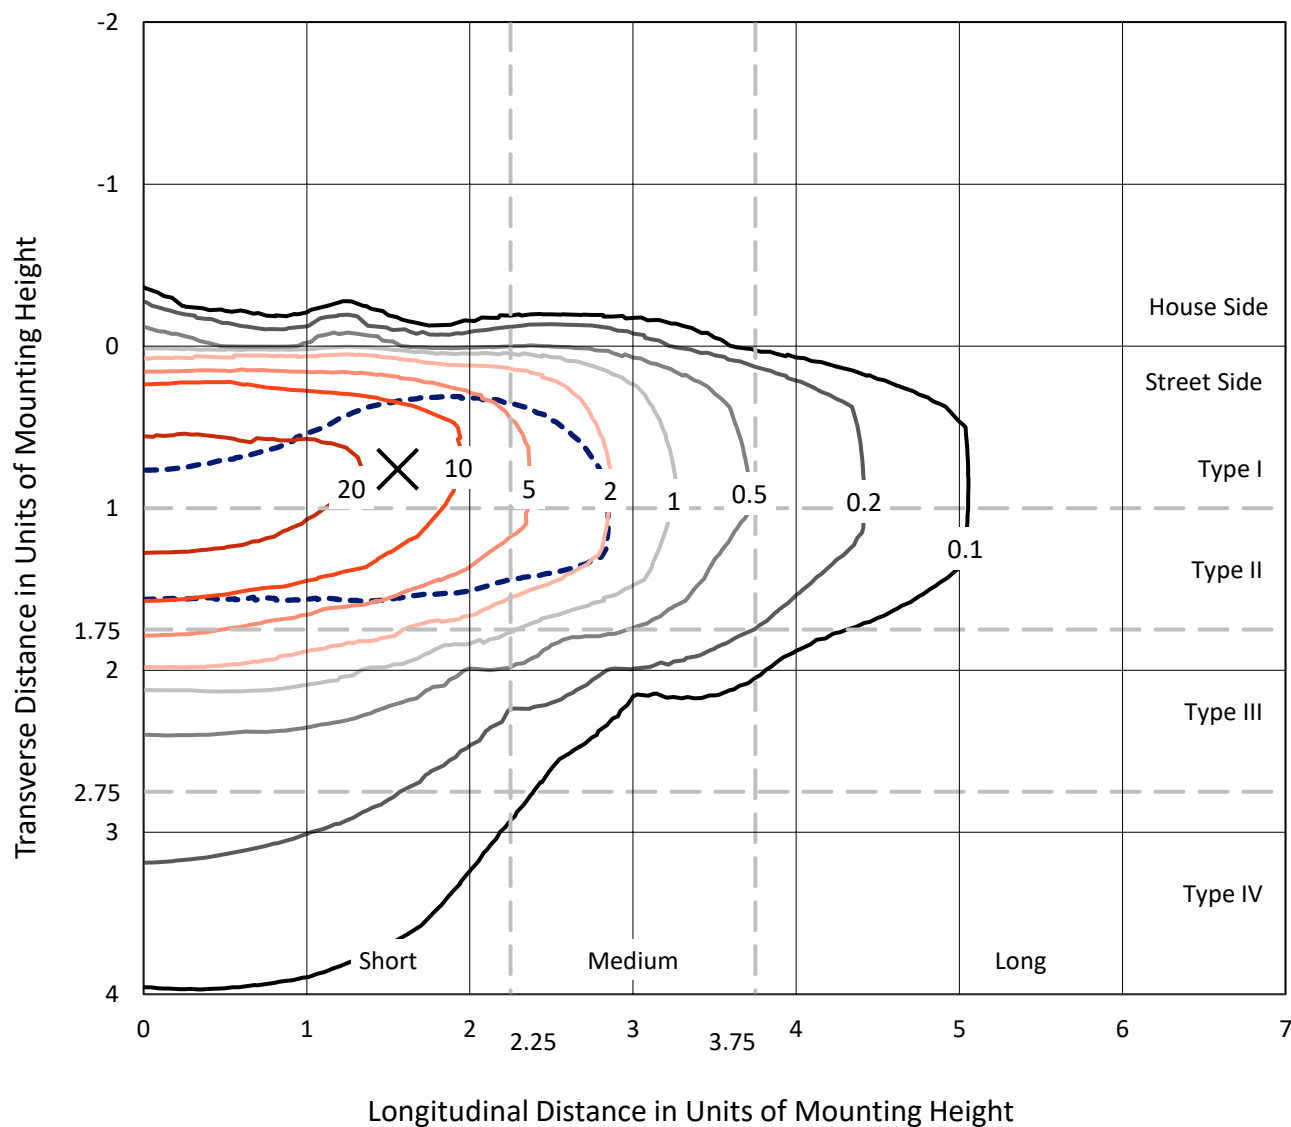


Based on 15 foot mounting height. Maximum calculated value = 37.7 fc
 Type II - Short - N/A

REPORT NUMBER: P1066114

CATALOG NUMBER: NVN-SA6B-760-U-T2BC

Luminous Intensity Polar Plot

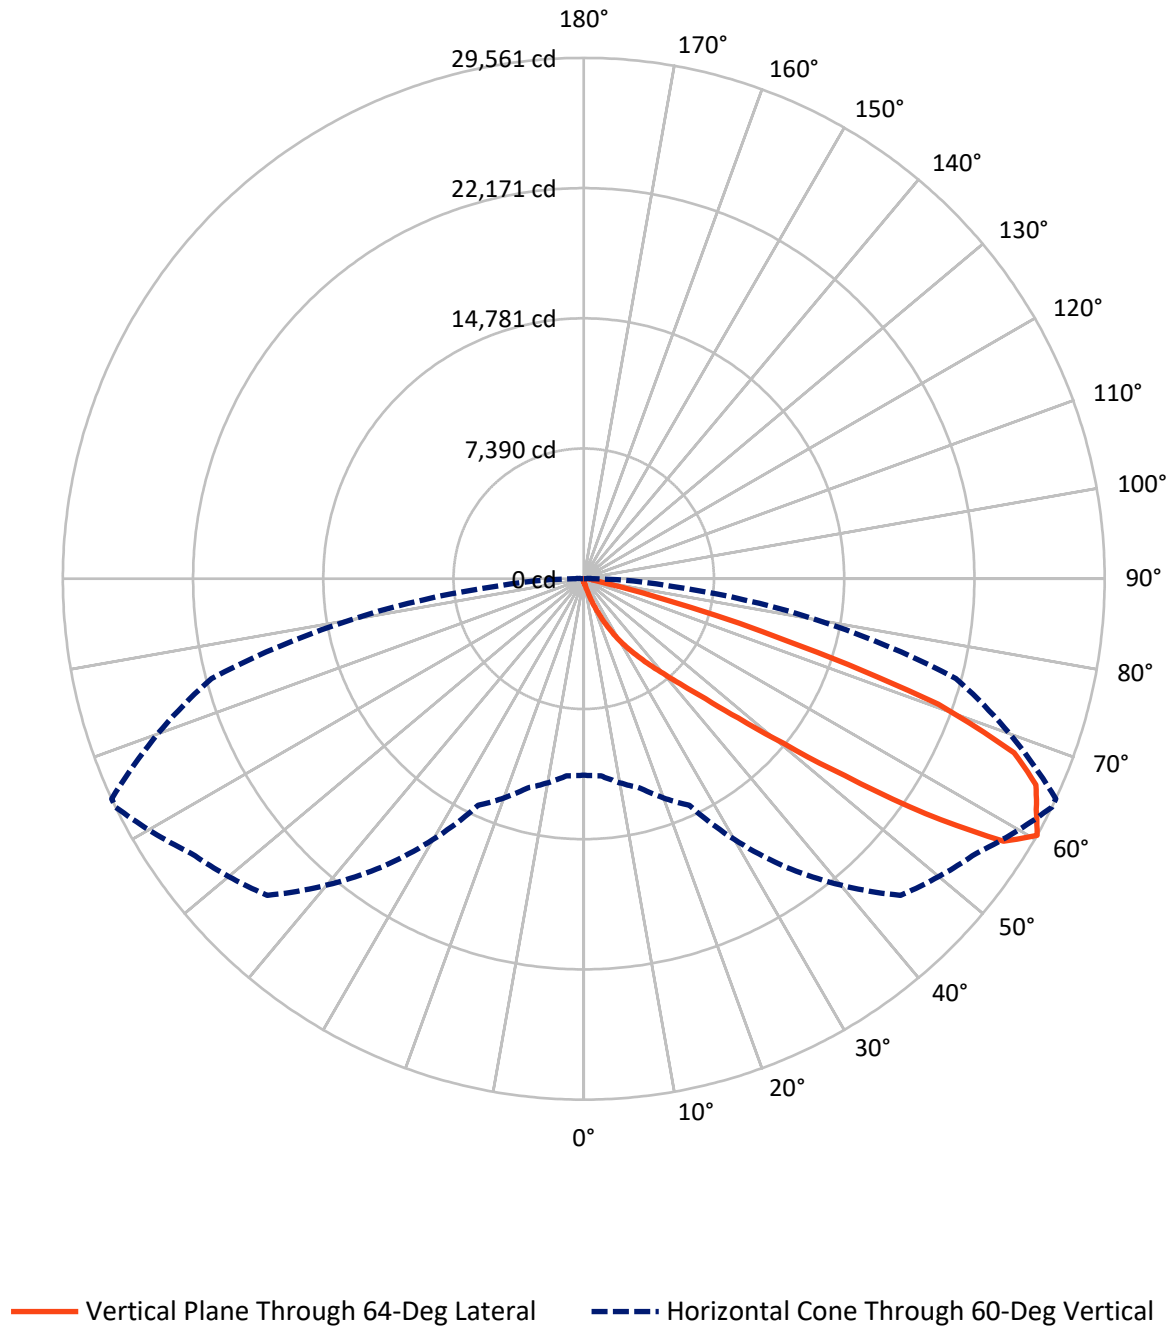

REPORT NUMBER: P1066114

CATALOG NUMBER: NVN-SA6B-760-U-T2BC


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	106.6	0.0	106.6
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	26195.6	0.0	26195.6
	% Fixture	99.6	0.0	99.6
Total	Lumens	26302.2	0.0	26302.2
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	26.2	0.1
10°-20°	258.5	1.0
20°-30°	858.4	3.3
30°-40°	2290.6	8.7
40°-50°	5822.1	22.1
50°-60°	8487.3	32.3
60°-70°	6555.6	24.9
70°-80°	1800.3	6.8
80°-90°	203.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	26302.2	100.0
0°-180°	26302.2	100.0

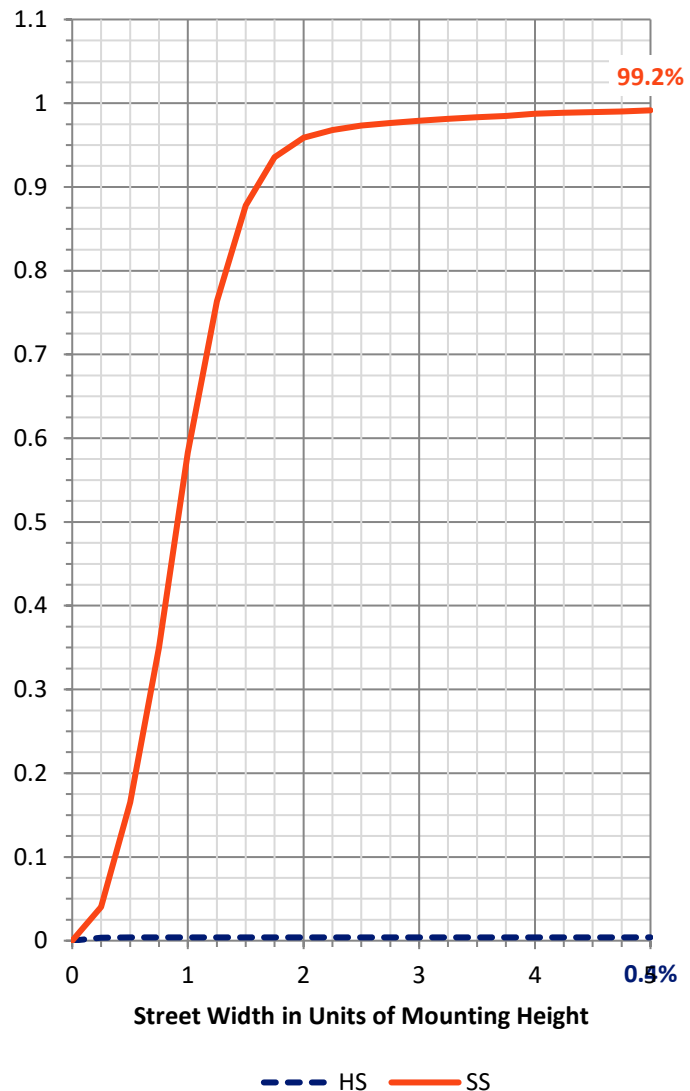

REPORT NUMBER: P1066114


CATALOG NUMBER: NVN-SA6B-760-U-T2BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1119.1	4.3			
FM	(30°-60°)	16564.6	63.0			
FH	(60°-80°)	8313.4	31.6			G4/12000
FVH	(80°-90°)	198.4	0.8			G2/225
BL	(0°-30°)	23.9	0.1	B0/110		
BM	(30°-60°)	35.3	0.1	B0/220		
BH	(60°-80°)	42.5	0.2	B0/110		G0/110
BVH	(80°-90°)	4.8	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G4

Type II Short

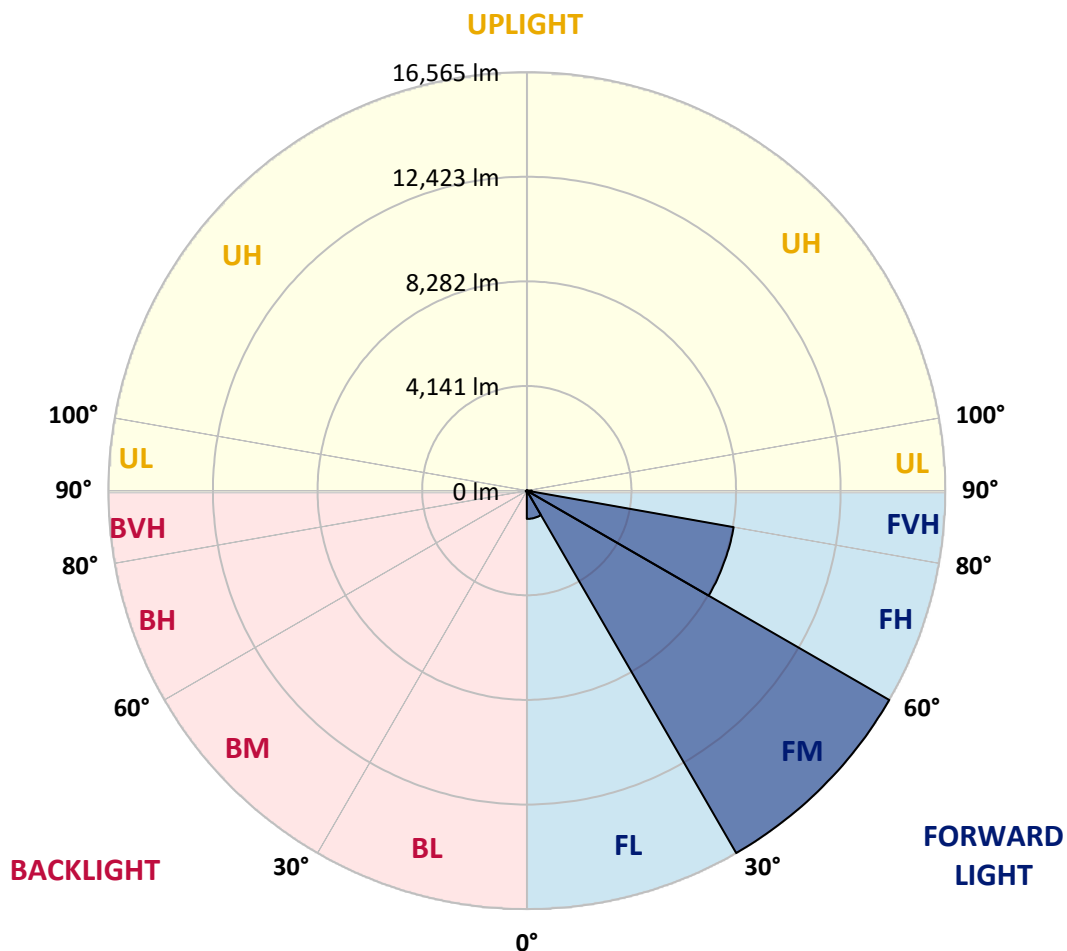



REPORT NUMBER: P1066114

CATALOG NUMBER: NVN-SA6B-760-U-T2BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	64°	65°	75°	85°
0°	173.8	173.8	173.8	173.8	173.8	173.8	173.8	173.8	173.8	173.8	173.8
2.5°	231.7	231.7	231.7	224.4	217.2	217.2	210.0	202.7	202.7	188.2	181.0
5°	354.8	354.8	340.3	325.8	304.1	275.1	246.2	224.4	224.4	202.7	188.2
7.5°	695.0	716.8	651.6	572.0	463.4	391.0	311.3	260.6	253.4	217.2	188.2
10°	1505.9	1491.5	1390.1	1194.6	941.2	680.6	434.4	318.6	304.1	231.7	188.2
12.5°	2266.1	2287.9	2179.3	1962.1	1658.0	1209.1	745.7	412.7	398.2	253.4	188.2
15°	2917.7	2917.7	2845.3	2736.7	2403.7	1933.1	1201.8	615.4	564.7	275.1	181.0
17.5°	3366.6	3359.4	3330.4	3301.5	3106.0	2620.9	1839.0	984.6	868.8	325.8	181.0
20°	3873.4	3851.7	3887.9	3830.0	3677.9	3294.2	2512.3	1462.5	1353.9	412.7	181.0
22.5°	4401.9	4423.7	4452.6	4394.7	4228.2	3895.1	3221.8	2077.9	1962.1	572.0	188.2
25°	5075.3	5060.8	5126.0	5075.3	4865.3	4474.4	3887.9	2751.2	2584.7	796.4	202.7
27.5°	5900.6	5871.7	5915.1	5784.8	5509.7	5111.5	4481.6	3439.0	3243.5	1143.9	231.7
30°	6993.9	7015.6	6820.1	6668.1	6277.1	5748.6	5140.4	4177.5	3974.8	1556.6	260.6
32.5°	8717.0	8565.0	8260.9	7645.5	7131.4	6458.1	5799.3	4821.9	4640.9	2085.1	304.1
35°	11403.1	11432.0	10766.0	9245.5	8130.6	7348.7	6523.3	5531.4	5401.1	2686.1	362.0
37.5°	14675.6	14595.9	14009.5	12090.9	9593.1	8456.4	7348.7	6306.1	6117.8	3337.7	434.4
40°	18382.5	18049.4	17709.2	16406.0	12641.1	9846.5	8391.2	7203.8	7059.0	4090.6	550.2
42.5°	21350.9	21264.0	21321.9	20778.9	17723.6	12214.0	9774.1	8304.3	8130.6	5024.6	753.0
45°	22813.4	22690.3	23037.8	23443.3	22661.4	17253.0	12004.0	9708.9	9477.2	6125.1	1064.3
47.5°	22422.4	22335.6	23081.3	23877.7	24920.2	23095.8	15645.7	11808.5	11410.3	7536.9	1527.7
50°	20496.6	20503.8	21727.4	23211.6	24862.3	26056.9	21039.6	14682.8	14183.3	9412.1	2251.7
52.5°	18621.4	18679.3	19975.3	22140.1	24000.8	26404.5	25774.6	18556.2	17745.4	11620.3	3106.0
55°	16695.6	16724.5	17868.4	20916.5	23595.3	25369.1	28207.2	23544.6	22683.1	14371.5	3938.6
57.5°	14842.1	14842.1	15269.3	17977.0	23153.7	25275.0	27917.6	28105.9	27403.6	17513.7	4554.0
60°	11149.7	11222.1	12286.4	14183.3	19968.1	25412.6	27179.1	29561.1	29561.1	21872.2	5024.6
62.5°	5632.8	5741.4	7066.3	8912.5	13698.2	23515.7	27295.0	28829.9	28945.7	25716.7	6096.1
65°	2642.6	2765.7	3475.2	4778.4	7370.4	16550.8	26093.1	28207.2	28171.0	24985.4	8355.0
67.5°	1896.9	1933.1	2172.0	2787.4	3967.5	7254.5	19917.4	26346.5	26361.0	21227.8	9607.5
70°	1701.4	1701.4	1759.3	1940.3	2389.2	3243.5	9679.9	21336.4	22371.8	16391.5	8905.3
72.5°	1679.7	1665.2	1650.7	1658.0	1614.5	1629.0	3323.2	12047.4	13524.4	11468.2	7102.5
75°	1636.3	1636.3	1621.8	1571.1	1288.7	1049.8	1143.9	4872.6	5632.8	7660.0	5270.8
77.5°	1296.0	1426.3	1578.3	1484.2	1180.1	789.2	666.1	1411.8	1781.1	4698.8	3822.7
80°	600.9	608.2	600.9	629.9	753.0	564.7	492.3	687.8	695.0	2606.4	2367.5
82.5°	434.4	441.6	419.9	376.5	333.0	304.1	405.4	506.8	543.0	1194.6	883.3
85°	130.3	123.1	144.8	195.5	231.7	267.9	340.3	427.2	448.9	441.6	130.3
87.5°	57.9	57.9	72.4	101.4	137.6	202.7	296.8	391.0	398.2	456.1	36.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1066114

CATALOG NUMBER: NVN-SA6B-760-U-T2BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	173.8	173.8	173.8	173.8	173.8	173.8	173.8	173.8	173.8	173.8	173.8
2.5°	181.0	173.8	166.5	159.3	152.0	144.8	137.6	137.6	144.8	144.8	144.8
5°	173.8	166.5	152.0	137.6	130.3	123.1	115.8	115.8	123.1	123.1	123.1
7.5°	173.8	159.3	144.8	130.3	115.8	108.6	101.4	101.4	101.4	108.6	108.6
10°	173.8	159.3	137.6	115.8	101.4	94.1	86.9	79.6	86.9	86.9	86.9
12.5°	166.5	152.0	130.3	108.6	86.9	72.4	65.2	65.2	65.2	65.2	65.2
15°	159.3	144.8	123.1	94.1	72.4	57.9	43.4	43.4	43.4	50.7	50.7
17.5°	152.0	137.6	108.6	72.4	50.7	36.2	29.0	29.0	29.0	36.2	36.2
20°	152.0	130.3	94.1	57.9	36.2	21.7	14.5	14.5	14.5	21.7	29.0
22.5°	152.0	130.3	86.9	43.4	21.7	14.5	7.2	7.2	7.2	7.2	7.2
25°	152.0	123.1	79.6	36.2	14.5	7.2	0.0	0.0	7.2	14.5	21.7
27.5°	152.0	115.8	65.2	21.7	14.5	7.2	0.0	7.2	14.5	14.5	14.5
30°	152.0	115.8	57.9	21.7	7.2	0.0	0.0	7.2	14.5	14.5	21.7
32.5°	159.3	108.6	50.7	14.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	166.5	101.4	43.4	14.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	181.0	101.4	29.0	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	202.7	108.6	29.0	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	253.4	115.8	21.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	354.8	144.8	21.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	521.3	217.2	21.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	760.2	296.8	14.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	934.0	296.8	14.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	926.7	188.2	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	709.5	130.3	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	600.9	94.1	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	724.0	72.4	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	1288.7	65.2	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	2070.7	65.2	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	2316.8	65.2	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	1810.0	57.9	7.2	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	991.9	50.7	7.2	7.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	499.6	36.2	14.5	7.2	7.2	0.0	0.0	0.0	0.0	0.0	0.0
80°	210.0	29.0	14.5	7.2	7.2	7.2	0.0	0.0	0.0	0.0	0.0
82.5°	72.4	29.0	14.5	14.5	7.2	7.2	0.0	0.0	0.0	0.0	0.0
85°	36.2	21.7	21.7	14.5	14.5	7.2	7.2	0.0	0.0	0.0	0.0
87.5°	21.7	21.7	21.7	14.5	14.5	7.2	7.2	0.0	0.0	0.0	7.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-7

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-757-U-5WQ


Data in this report applies to families of products including GSS-SB1A-757-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-7
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-757-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI
 5700K CCT 26 LEDS

Spectral Parameters

CCT (K):	5571	CRI (Ra):	69.9		
CIE u':	0.2033	R1:	68.8	R9:	-35.4
CIE v':	0.4806	R2:	72.5	R10:	36.7
Duv:	0.0041	R3:	76.8	R11:	73.9
CIE x:	0.3308	R4:	72.0	R12:	47.8
CIE y:	0.3476	R5:	70.9	R13:	68.0
CIE z:	0.3216	R6:	65.6	R14:	87.0
Peak Wavelength (nm):	442	R7:	75.5	R15:	59.8
Dominant Wavelength (nm):	544	R8:	56.8		
Purity:	3.635698				
Rf:	70.4				
Rg:	97.1				

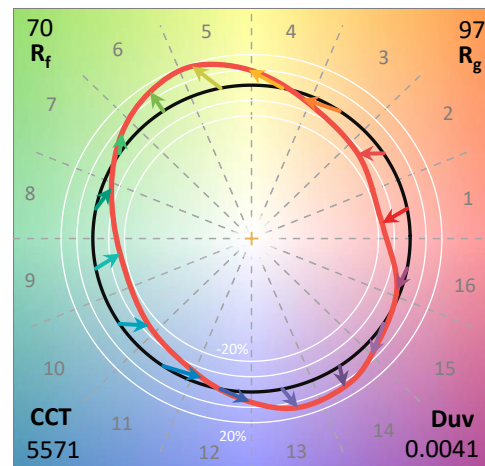

Test Conditions


Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-7

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-7

Photopic Flux vs. Wavelength

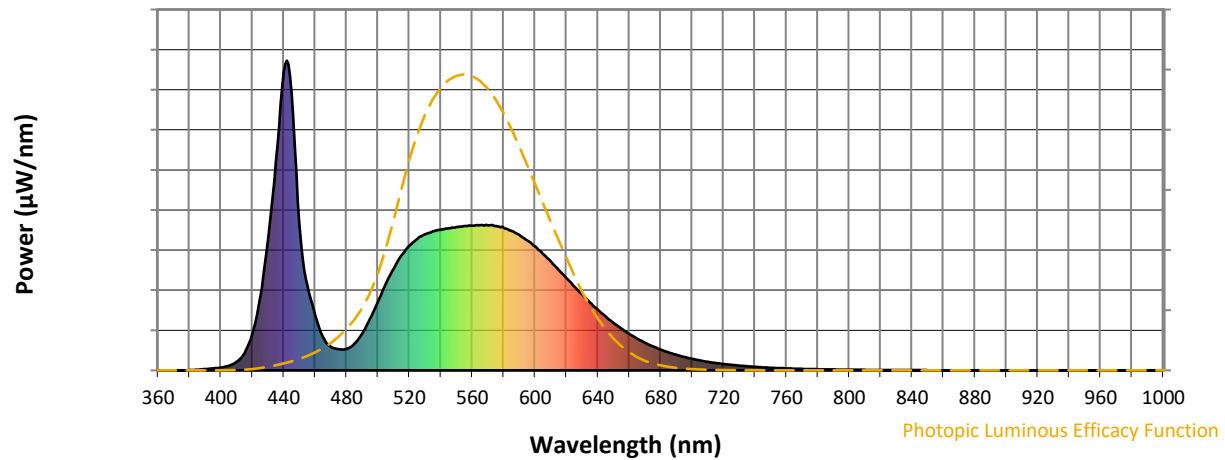


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Scotopic Flux vs. Wavelength

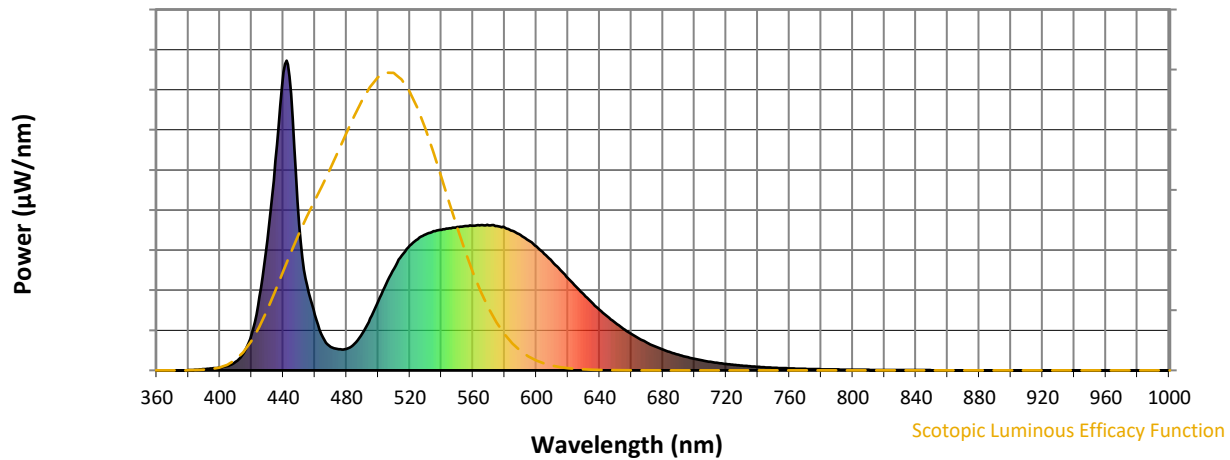


Scotopic Lumens: NR

S/P: 1.84

λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Melanopic Flux vs. Wavelength

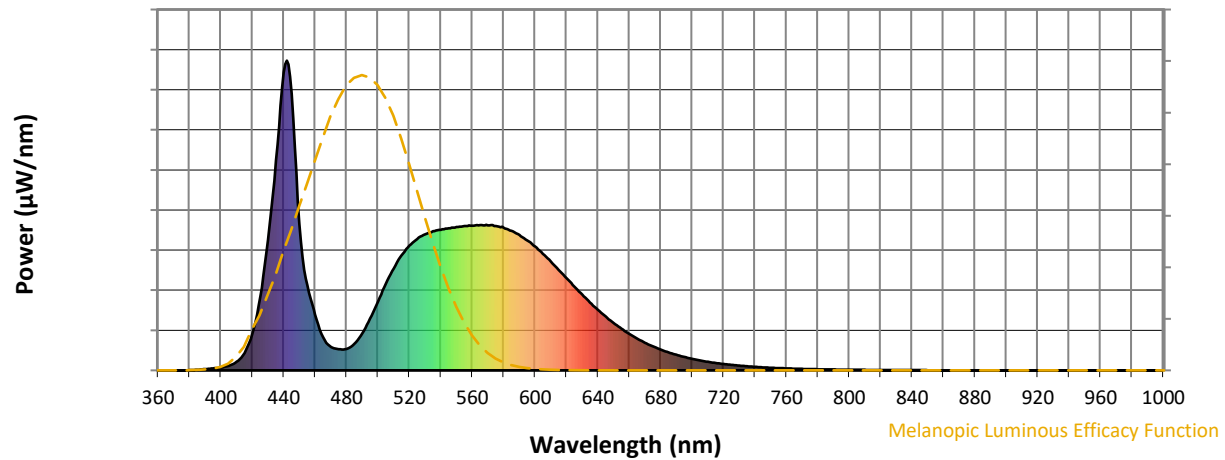

Melanopic Lumens: NR

M/P: 3.71


λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7





TM-30-18

Summary

$R_f = 70.4$
 $R_g = 97.1$
 $CIE R_a = 69.9$
 $R_g = -35.4$

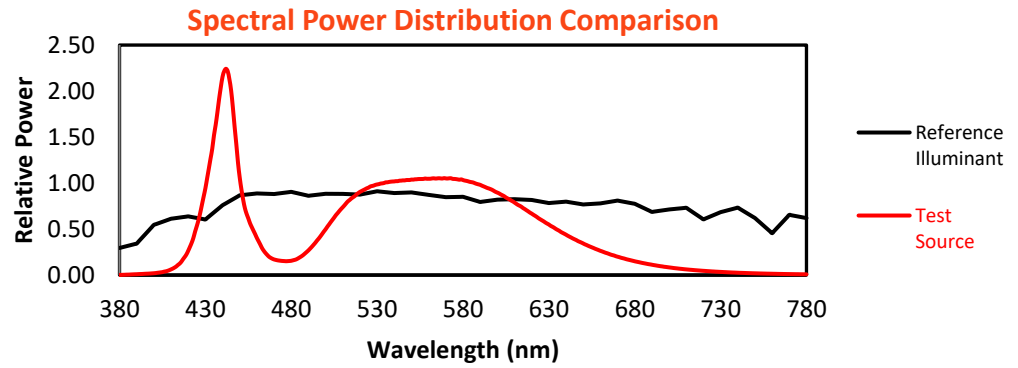





Color Vector Graphics

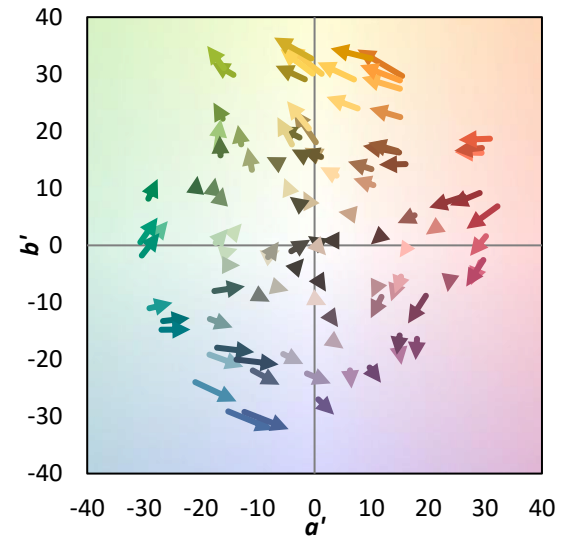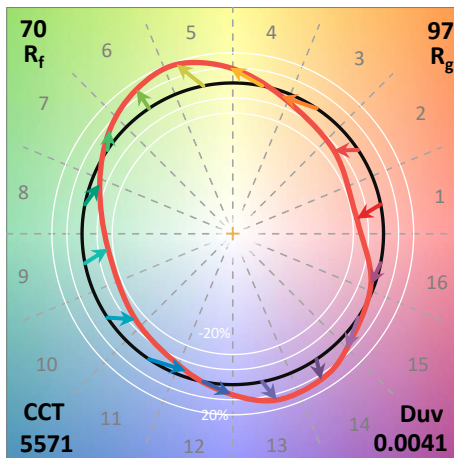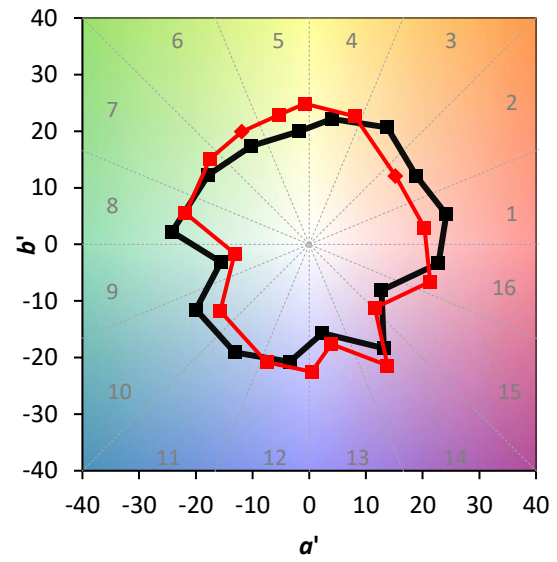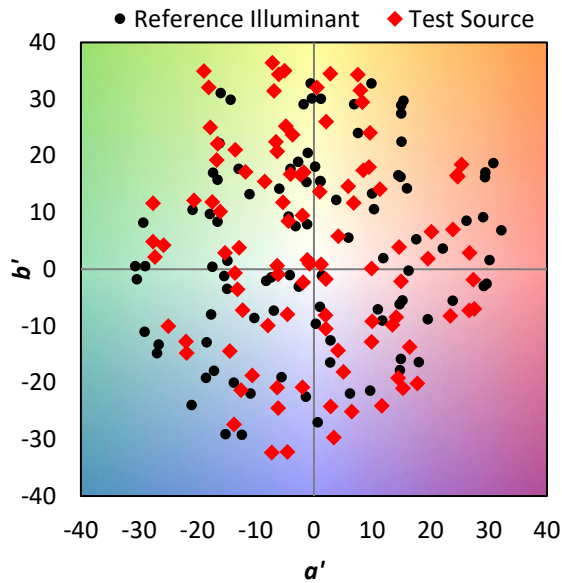



Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 85	CES26 = 52	CES51 = 87	CES76 = 40
CES02 = 59	CES27 = 77	CES52 = 88	CES77 = 62
CES03 = 30	CES28 = 76	CES53 = 74	CES78 = 43
CES04 = 68	CES29 = 46	CES54 = 79	CES79 = 72
CES05 = 45	CES30 = 54	CES55 = 78	CES80 = 68
CES06 = 49	CES31 = 52	CES56 = 67	CES81 = 70
CES07 = 38	CES32 = 49	CES57 = 64	CES82 = 87
CES08 = 37	CES33 = 59	CES58 = 66	CES83 = 81
CES09 = 29	CES34 = 61	CES59 = 87	CES84 = 87
CES10 = 72	CES35 = 78	CES60 = 91	CES85 = 83
CES11 = 55	CES36 = 88	CES61 = 88	CES86 = 75
CES12 = 61	CES37 = 71	CES62 = 77	CES87 = 74
CES13 = 41	CES38 = 64	CES63 = 74	CES88 = 76
CES14 = 74	CES39 = 90	CES64 = 71	CES89 = 75
CES15 = 70	CES40 = 81	CES65 = 63	CES90 = 73
CES16 = 46	CES41 = 82	CES66 = 66	CES91 = 93
CES17 = 48	CES42 = 69	CES67 = 63	CES92 = 69
CES18 = 55	CES43 = 67	CES68 = 71	CES93 = 82
CES19 = 70	CES44 = 98	CES69 = 81	CES94 = 58
CES20 = 63	CES45 = 77	CES70 = 57	CES95 = 72
CES21 = 85	CES46 = 76	CES71 = 54	CES96 = 78
CES22 = 77	CES47 = 73	CES72 = 84	CES97 = 82
CES23 = 91	CES48 = 65	CES73 = 45	CES98 = 70
CES24 = 90	CES49 = 77	CES74 = 92	CES99 = 59
CES25 = 71	CES50 = 85	CES75 = 49	

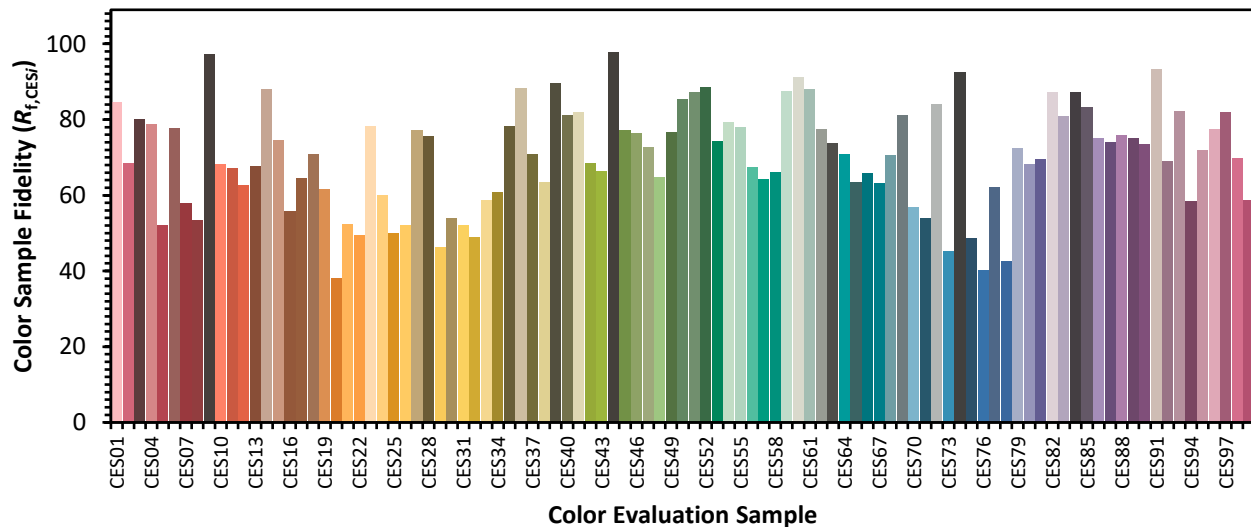

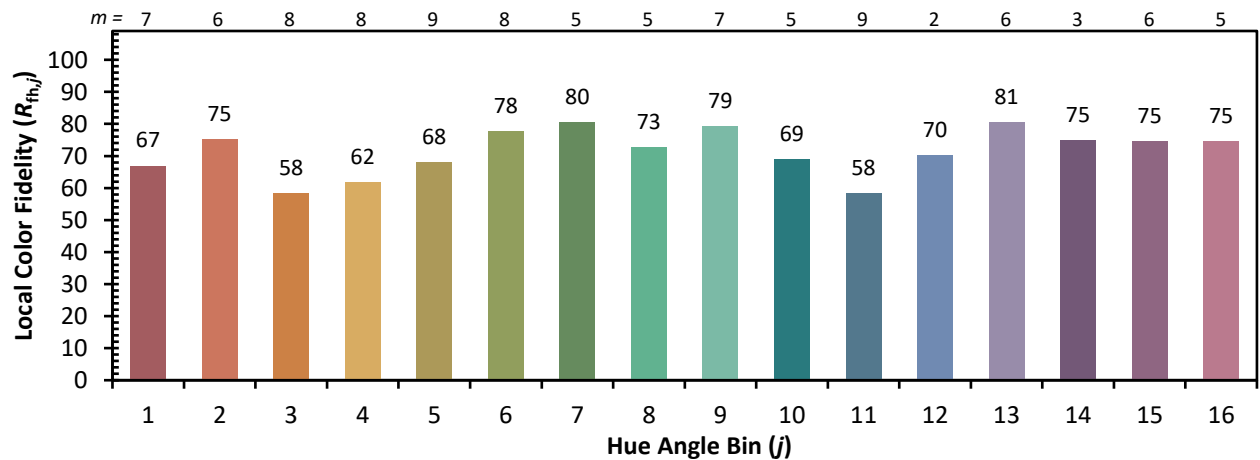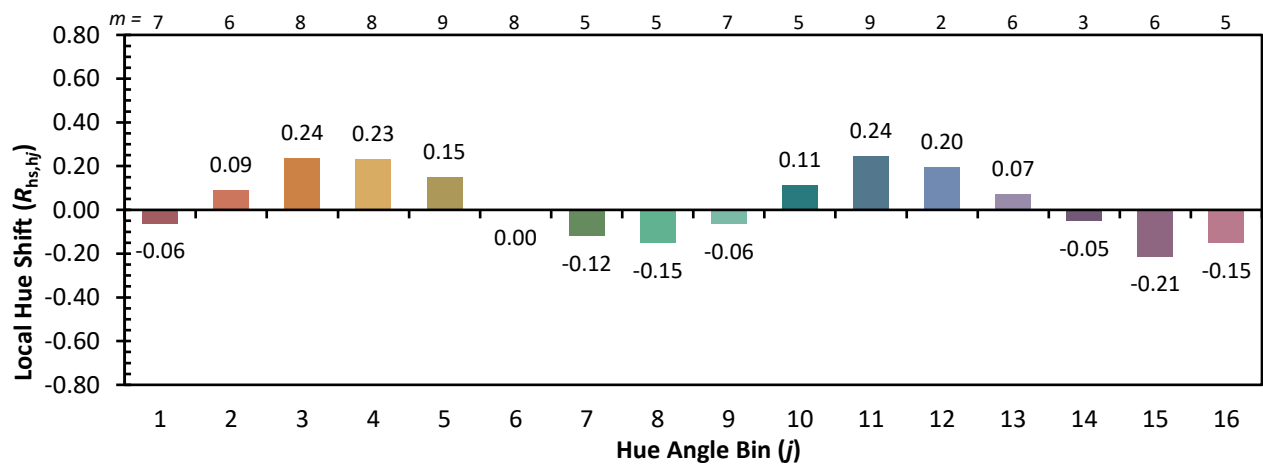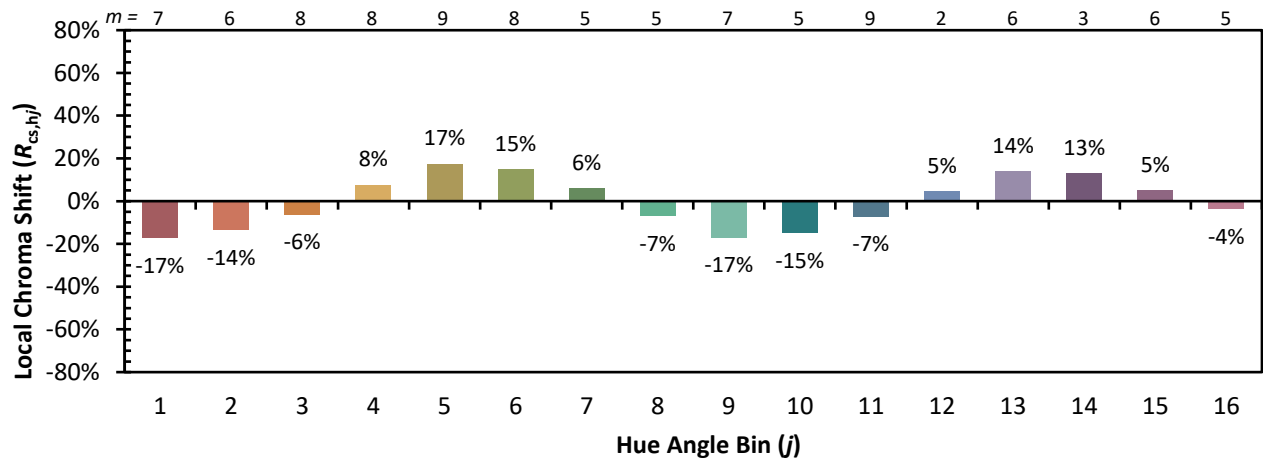Color Rendition by Hue-Angle Bin


Measure Comparisons

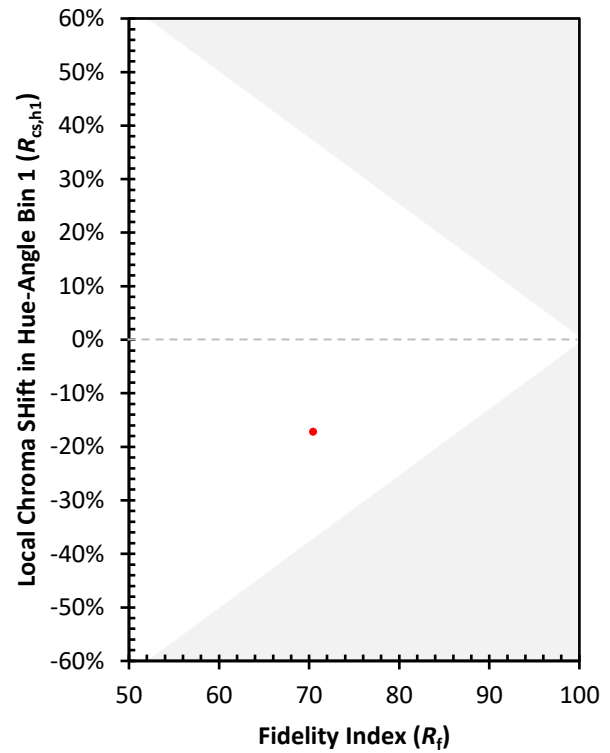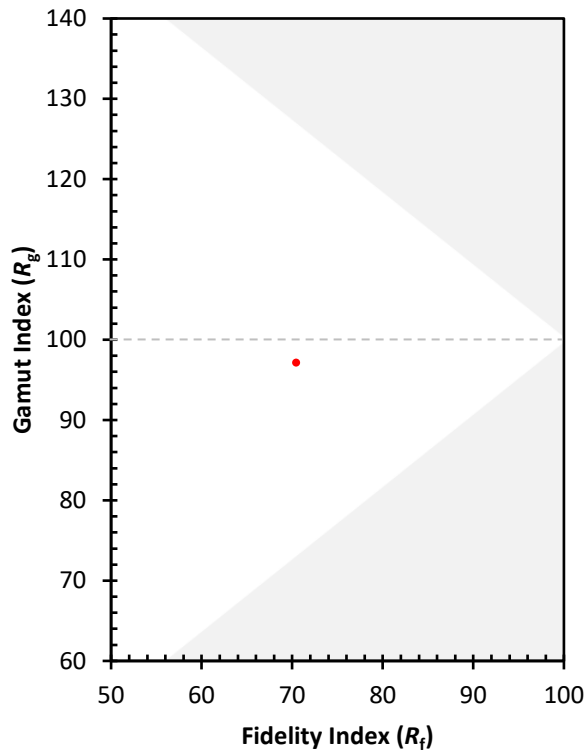

(END OF REPORT)