

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1066116

Luminaire Tested: **NVN-SA6D-760-U-T2BC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1066116
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: NVN-SA6D-760-U-T2BC
Description: Navion AREA AND ROADWAY LUMINAIRE 1200mA 6xLight Square PACKAGE
70CRI 5700K FIXTURE w/ TYPE II ANGLED BACKLIGHT CONTROL
Light Source: (84) 5700K CCT, 70 CRI LEDs
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 35980.8 lumens
Efficiency: N/A
Efficacy: 112.3 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B0 - U0 - G4

Input Watts (W): 320.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1066116

CATALOG NUMBER: NVN-SA6D-760-U-T2BC

Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd
 - - - 1/2 Max cd

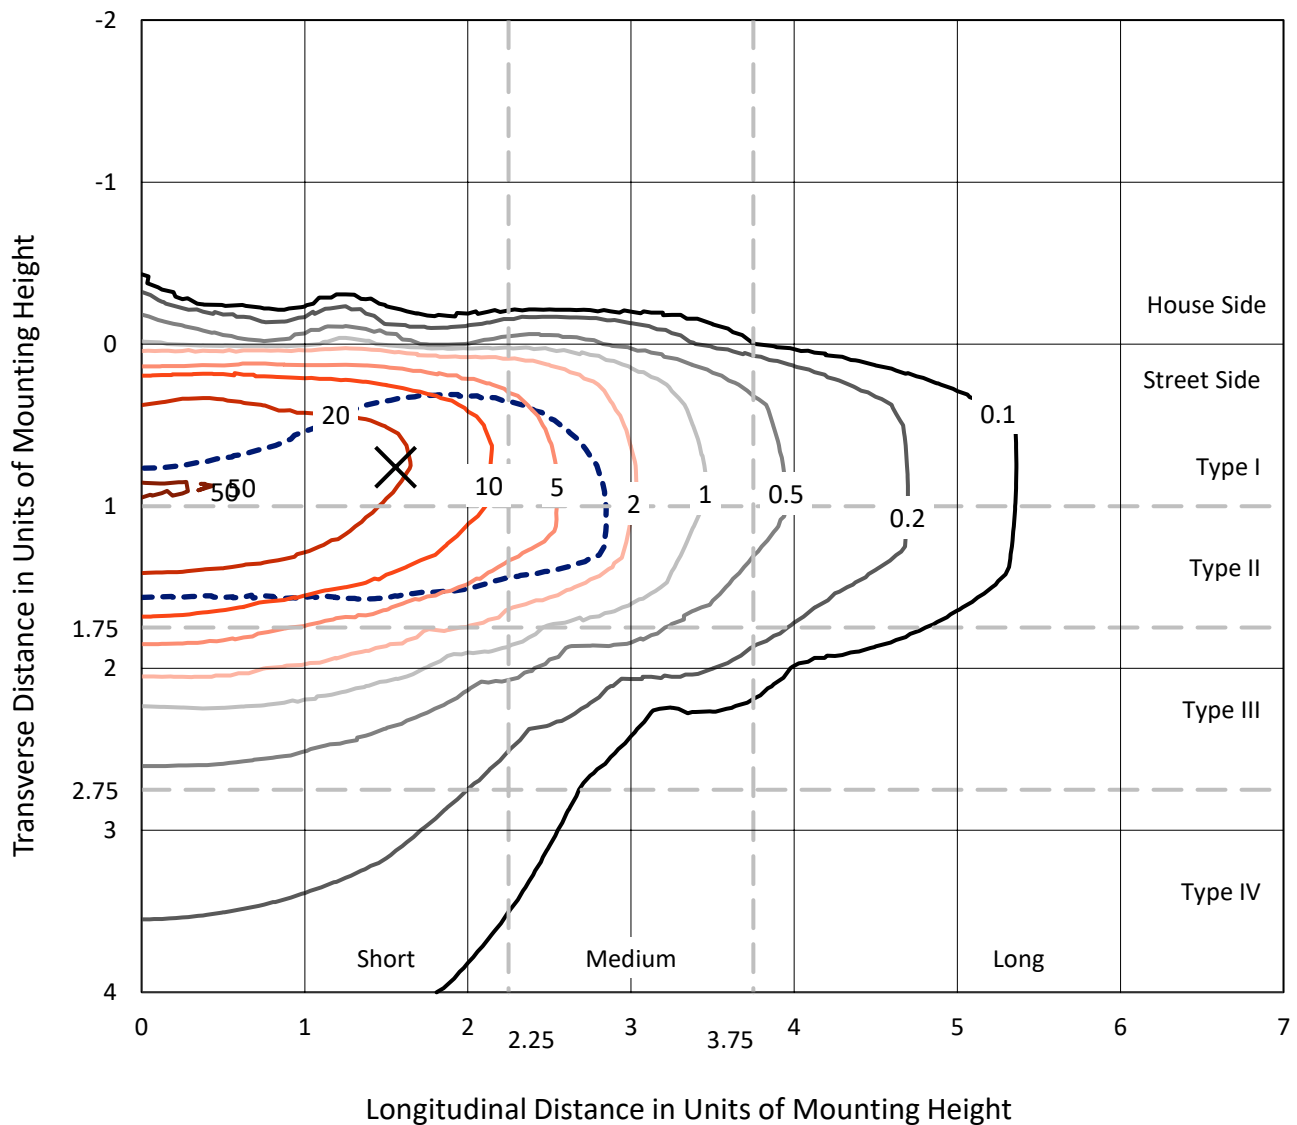


Based on 15 foot mounting height. Maximum calculated value = 51.6 fc
 Type II - Short - N/A

REPORT NUMBER: P1066116

CATALOG NUMBER: NVN-SA6D-760-U-T2BC

Luminous Intensity Polar Plot

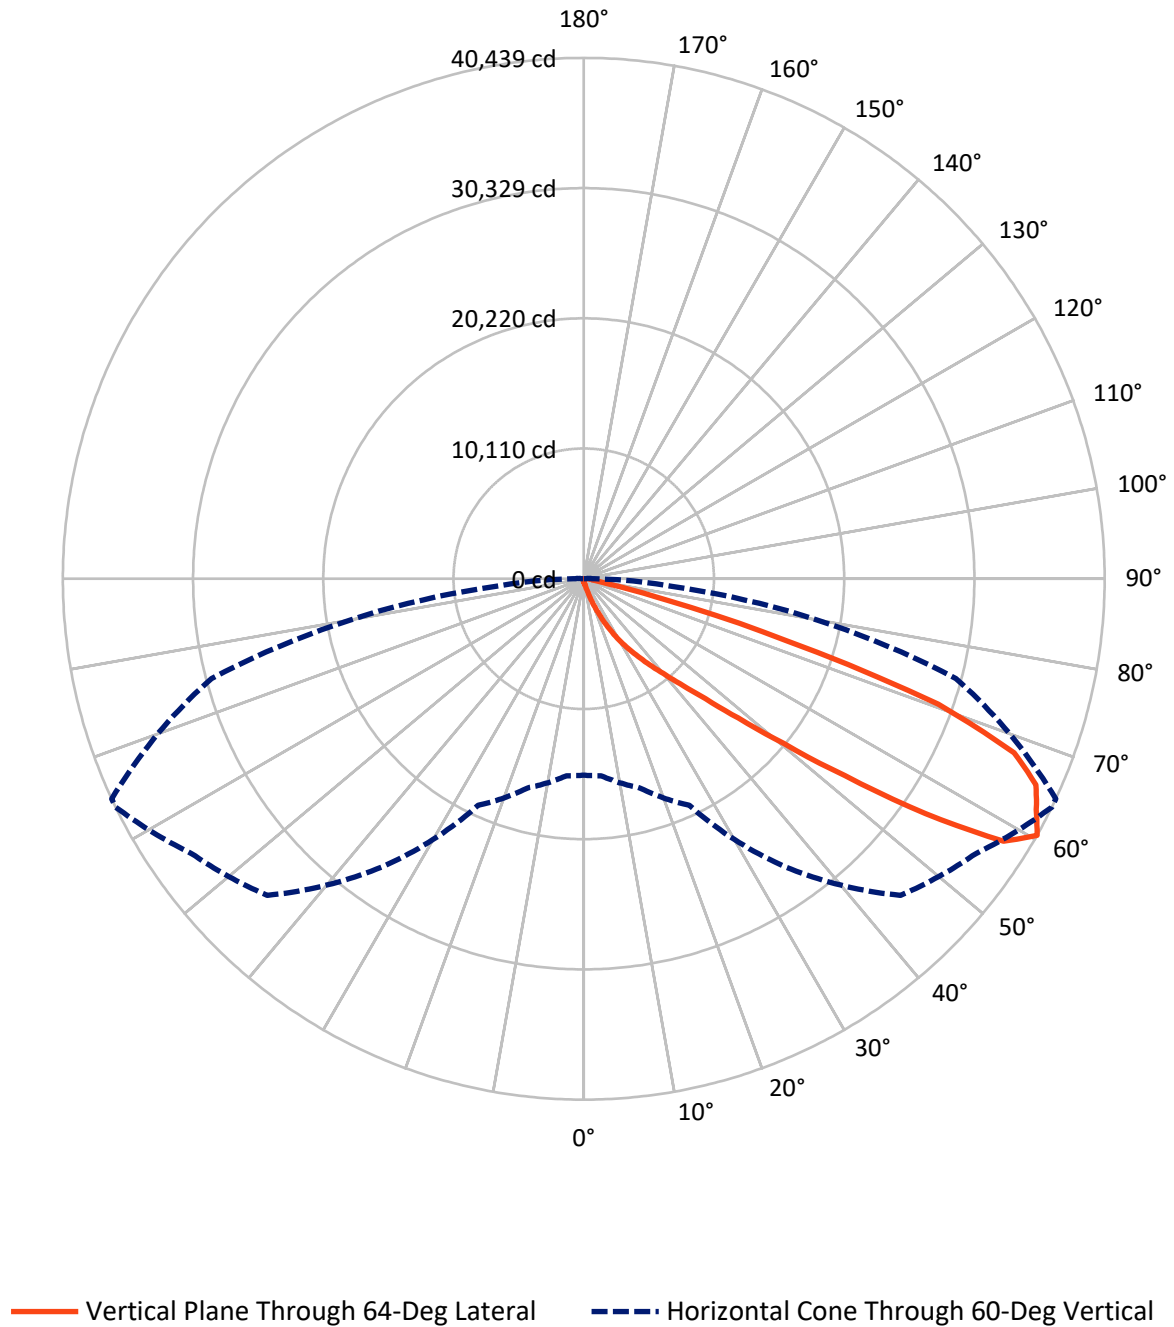

REPORT NUMBER: P1066116

CATALOG NUMBER: NVN-SA6D-760-U-T2BC


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	145.8	0.0	145.8
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	35834.9	0.0	35834.9
	% Fixture	99.6	0.0	99.6
Total	Lumens	35980.8	0.0	35980.8
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.8	0.1
10°-20°	353.6	1.0
20°-30°	1174.3	3.3
30°-40°	3133.5	8.7
40°-50°	7964.5	22.1
50°-60°	11610.5	32.3
60°-70°	8967.9	24.9
70°-80°	2462.8	6.8
80°-90°	278.0	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	35980.8	100.0
0°-180°	35980.8	100.0

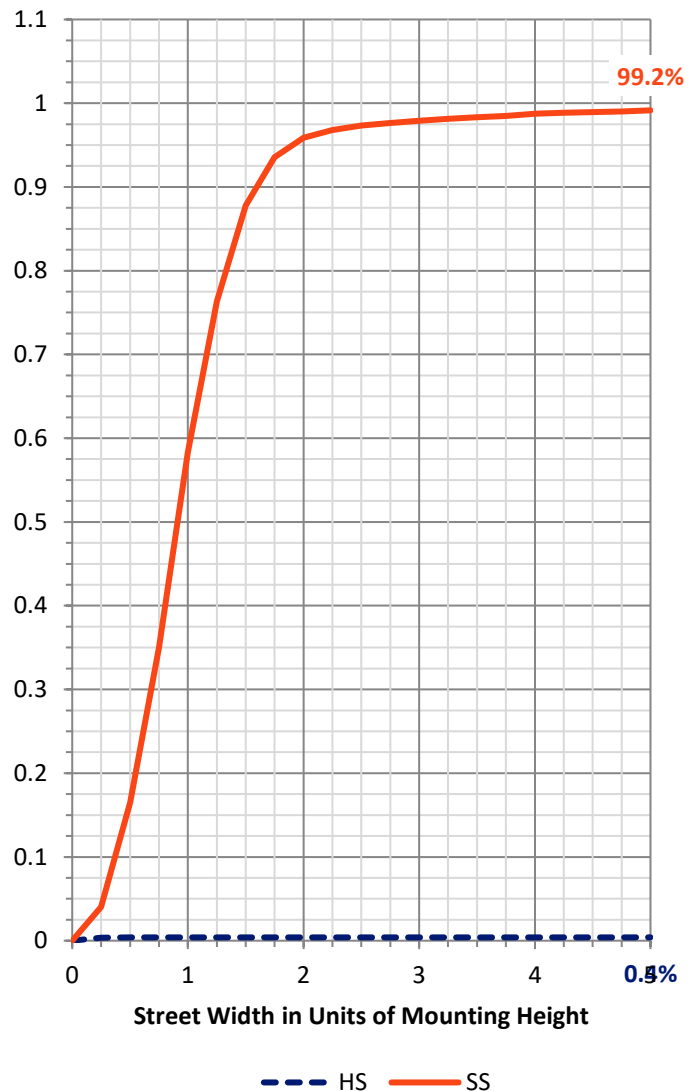

REPORT NUMBER: P1066116


CATALOG NUMBER: NVN-SA6D-760-U-T2BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1531.0	4.3			
FM	(30°-60°)	22660.0	63.0			
FH	(60°-80°)	11372.5	31.6			G4/12000
FVH	(80°-90°)	271.4	0.8			G3/500
BL	(0°-30°)	32.8	0.1	B0/110		
BM	(30°-60°)	48.3	0.1	B0/220		
BH	(60°-80°)	58.2	0.2	B0/110		G0/110
BVH	(80°-90°)	6.6	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G4

Type II Short

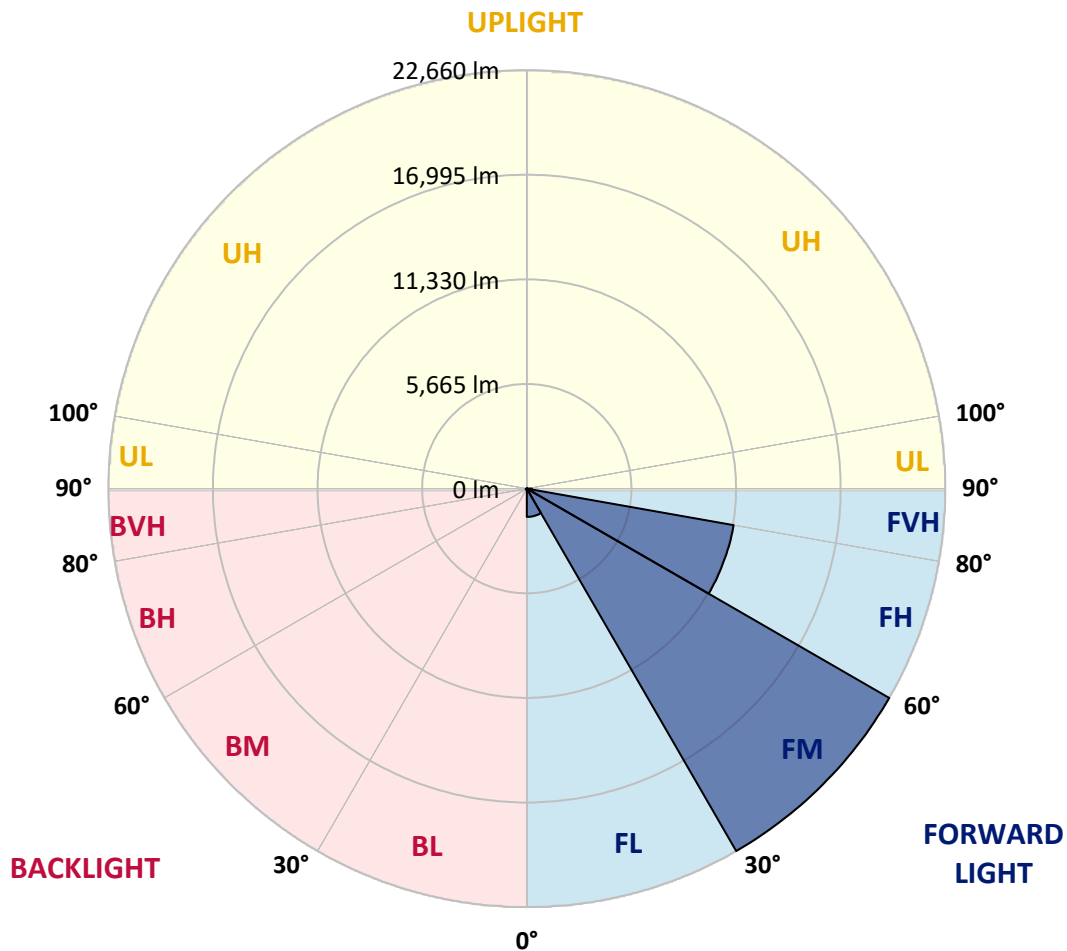

REPORT NUMBER: P1066116

CATALOG NUMBER: NVN-SA6D-760-U-T2BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	64°	65°	75°	85°
0°	237.7	237.7	237.7	237.7	237.7	237.7	237.7	237.7	237.7	237.7	237.7
2.5°	316.9	316.9	316.9	307.0	297.1	297.1	287.2	277.3	277.3	257.5	247.6
5°	485.3	485.3	465.5	445.7	416.0	376.4	336.7	307.0	307.0	277.3	257.5
7.5°	950.8	980.5	891.4	782.4	633.9	534.8	425.9	356.6	346.6	297.1	257.5
10°	2060.1	2040.3	1901.6	1634.2	1287.5	931.0	594.3	435.8	416.0	316.9	257.5
12.5°	3100.0	3129.7	2981.2	2684.0	2268.1	1654.0	1020.1	564.5	544.7	346.6	257.5
15°	3991.4	3991.4	3892.4	3743.8	3288.2	2644.4	1644.1	841.9	772.5	376.4	247.6
17.5°	4605.5	4595.6	4555.9	4516.3	4248.9	3585.3	2515.7	1347.0	1188.5	445.7	247.6
20°	5298.8	5269.0	5318.6	5239.3	5031.3	4506.4	3436.8	2000.7	1852.1	564.5	247.6
22.5°	6021.8	6051.5	6091.1	6011.9	5784.1	5328.5	4407.4	2842.5	2684.0	782.4	257.5
25°	6942.9	6923.1	7012.2	6942.9	6655.6	6120.8	5318.6	3763.6	3535.8	1089.5	277.3
27.5°	8071.9	8032.3	8091.8	7913.5	7537.1	6992.4	6130.7	4704.5	4437.1	1564.9	316.9
30°	9567.5	9597.2	9329.8	9121.8	8587.0	7864.0	7032.0	5714.7	5437.4	2129.4	356.6
32.5°	11924.7	11716.7	11300.7	10458.9	9755.7	8834.6	7933.3	6596.2	6348.6	2852.4	416.0
35°	15599.2	15638.8	14727.6	12647.7	11122.4	10052.8	8923.7	7566.8	7388.6	3674.5	495.2
37.5°	20075.9	19966.9	19164.7	16540.1	13123.1	11568.1	10052.8	8626.6	8369.1	4565.8	594.3
40°	25146.8	24691.2	24225.7	22443.0	17292.8	13469.7	11479.0	9854.7	9656.6	5595.9	752.7
42.5°	29207.6	29088.7	29167.9	28425.1	24245.5	16708.4	13370.7	11360.1	11122.4	6873.5	1030.0
45°	31208.2	31039.8	31515.2	32069.9	31000.2	23601.8	16421.2	13281.6	12964.6	8379.0	1455.9
47.5°	30673.4	30554.5	31574.7	32664.1	34090.3	31594.5	21403.0	16153.8	15609.1	10310.3	2089.8
50°	28038.9	28048.8	29722.6	31752.9	34011.1	35645.3	28781.7	20085.8	19402.4	12875.5	3080.2
52.5°	25473.7	25552.9	27325.8	30287.1	32832.5	36120.7	35259.0	25384.5	24275.3	15896.3	4248.9
55°	22839.1	22878.8	24443.6	28613.3	32277.9	34704.4	38586.9	32208.5	31029.9	19659.9	5387.9
57.5°	20303.7	20303.7	20888.0	24592.2	31673.7	34575.7	38190.7	38448.2	37487.5	23958.3	6229.8
60°	15252.5	15351.5	16807.5	19402.4	27315.9	34763.8	37180.5	40439.0	40439.0	29920.7	6873.5
62.5°	7705.5	7854.1	9666.5	12192.1	18738.8	32168.9	37338.9	39438.6	39597.1	35179.8	8339.4
65°	3615.0	3783.4	4754.0	6536.8	10082.5	22641.1	35694.8	38586.9	38537.3	34179.5	11429.5
67.5°	2594.9	2644.4	2971.3	3813.1	5427.5	9924.0	27246.5	36041.5	36061.3	29039.2	13142.9
70°	2327.5	2327.5	2406.7	2654.3	3268.4	4437.1	13241.9	29187.8	30604.1	22423.2	12182.2
72.5°	2297.8	2278.0	2258.2	2268.1	2208.6	2228.5	4546.0	16480.6	18501.1	15688.3	9716.0
75°	2238.4	2238.4	2218.5	2149.2	1763.0	1436.1	1564.9	6665.5	7705.5	10478.7	7210.3
77.5°	1772.9	1951.1	2159.1	2030.4	1614.4	1079.6	911.2	1931.3	2436.4	6427.8	5229.4
80°	822.1	832.0	822.1	861.7	1030.0	772.5	673.5	940.9	950.8	3565.5	3238.7
82.5°	594.3	604.2	574.4	515.0	455.6	416.0	554.6	693.3	742.8	1634.2	1208.3
85°	178.3	168.4	198.1	267.4	316.9	366.5	465.5	584.3	614.1	604.2	178.3
87.5°	79.2	79.2	99.0	138.7	188.2	277.3	406.1	534.8	544.7	624.0	49.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1066116

CATALOG NUMBER: NVN-SA6D-760-U-T2BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	237.7	237.7	237.7	237.7	237.7	237.7	237.7	237.7	237.7	237.7	237.7
2.5°	247.6	237.7	227.8	217.9	208.0	198.1	188.2	188.2	198.1	198.1	198.1
5°	237.7	227.8	208.0	188.2	178.3	168.4	158.5	158.5	168.4	168.4	168.4
7.5°	237.7	217.9	198.1	178.3	158.5	148.6	138.7	138.7	138.7	148.6	148.6
10°	237.7	217.9	188.2	158.5	138.7	128.8	118.9	108.9	118.9	118.9	118.9
12.5°	227.8	208.0	178.3	148.6	118.9	99.0	89.1	89.1	89.1	89.1	89.1
15°	217.9	198.1	168.4	128.8	99.0	79.2	59.4	59.4	59.4	69.3	69.3
17.5°	208.0	188.2	148.6	99.0	69.3	49.5	39.6	39.6	39.6	49.5	49.5
20°	208.0	178.3	128.8	79.2	49.5	29.7	19.8	19.8	19.8	29.7	39.6
22.5°	208.0	178.3	118.9	59.4	29.7	19.8	9.9	9.9	9.9	9.9	9.9
25°	208.0	168.4	108.9	49.5	19.8	9.9	0.0	0.0	9.9	19.8	29.7
27.5°	208.0	158.5	89.1	29.7	19.8	9.9	0.0	9.9	19.8	19.8	19.8
30°	208.0	158.5	79.2	29.7	9.9	0.0	0.0	9.9	19.8	19.8	29.7
32.5°	217.9	148.6	69.3	19.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	227.8	138.7	59.4	19.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	247.6	138.7	39.6	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	277.3	148.6	39.6	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	346.6	158.5	29.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	485.3	198.1	29.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	713.1	297.1	29.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	1039.9	406.1	19.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	1277.6	406.1	19.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	1267.7	257.5	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	970.6	178.3	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	822.1	128.8	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	990.4	99.0	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	1763.0	89.1	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	2832.6	89.1	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	3169.4	89.1	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	2476.1	79.2	9.9	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	1356.9	69.3	9.9	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	683.4	49.5	19.8	9.9	9.9	0.0	0.0	0.0	0.0	0.0	0.0
80°	287.2	39.6	19.8	9.9	9.9	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	99.0	39.6	19.8	19.8	9.9	0.0	0.0	0.0	0.0	0.0	0.0
85°	49.5	29.7	29.7	19.8	19.8	9.9	9.9	0.0	0.0	0.0	0.0
87.5°	29.7	29.7	29.7	19.8	19.8	9.9	9.9	0.0	0.0	0.0	9.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-7

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-757-U-5WQ


Data in this report applies to families of products including GSS-SB1A-757-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-7
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-757-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI
 5700K CCT 26 LEDS

Spectral Parameters

CCT (K):	5571	CRI (Ra):	69.9		
CIE u':	0.2033	R1:	68.8	R9:	-35.4
CIE v':	0.4806	R2:	72.5	R10:	36.7
Duv:	0.0041	R3:	76.8	R11:	73.9
CIE x:	0.3308	R4:	72.0	R12:	47.8
CIE y:	0.3476	R5:	70.9	R13:	68.0
CIE z:	0.3216	R6:	65.6	R14:	87.0
Peak Wavelength (nm):	442	R7:	75.5	R15:	59.8
Dominant Wavelength (nm):	544	R8:	56.8		
Purity:	3.635698				
Rf:	70.4				
Rg:	97.1				

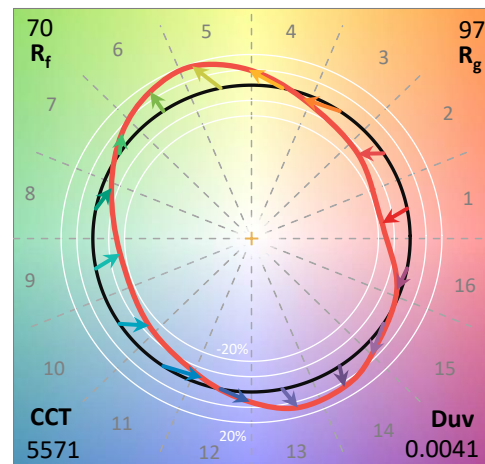

Test Conditions

Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-7

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-7

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5700K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-7

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.84

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Melanopic Flux vs. Wavelength


Melanopic Lumens: NR
M/P: 3.71

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7


TM-30-18

Summary

$R_f = 70.4$
 $R_g = 97.1$
 $CIE R_a = 69.9$
 $R_g = -35.4$




Color Vector Graphics



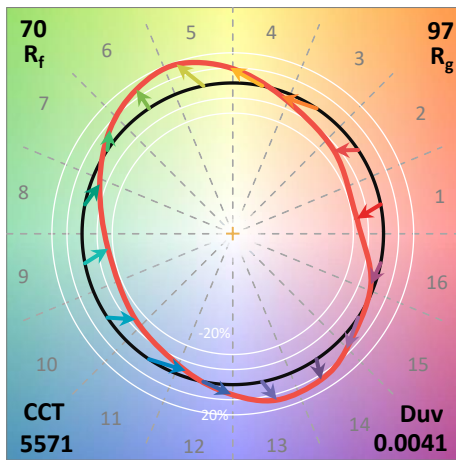


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 52	CES51 = 87	CES76 = 40
CES02 = 59	CES27 = 77	CES52 = 88	CES77 = 62
CES03 = 30	CES28 = 76	CES53 = 74	CES78 = 43
CES04 = 68	CES29 = 46	CES54 = 79	CES79 = 72
CES05 = 45	CES30 = 54	CES55 = 78	CES80 = 68
CES06 = 49	CES31 = 52	CES56 = 67	CES81 = 70
CES07 = 38	CES32 = 49	CES57 = 64	CES82 = 87
CES08 = 37	CES33 = 59	CES58 = 66	CES83 = 81
CES09 = 29	CES34 = 61	CES59 = 87	CES84 = 87
CES10 = 72	CES35 = 78	CES60 = 91	CES85 = 83
CES11 = 55	CES36 = 88	CES61 = 88	CES86 = 75
CES12 = 61	CES37 = 71	CES62 = 77	CES87 = 74
CES13 = 41	CES38 = 64	CES63 = 74	CES88 = 76
CES14 = 74	CES39 = 90	CES64 = 71	CES89 = 75
CES15 = 70	CES40 = 81	CES65 = 63	CES90 = 73
CES16 = 46	CES41 = 82	CES66 = 66	CES91 = 93
CES17 = 48	CES42 = 69	CES67 = 63	CES92 = 69
CES18 = 55	CES43 = 67	CES68 = 71	CES93 = 82
CES19 = 70	CES44 = 98	CES69 = 81	CES94 = 58
CES20 = 63	CES45 = 77	CES70 = 57	CES95 = 72
CES21 = 85	CES46 = 76	CES71 = 54	CES96 = 78
CES22 = 77	CES47 = 73	CES72 = 84	CES97 = 82
CES23 = 91	CES48 = 65	CES73 = 45	CES98 = 70
CES24 = 90	CES49 = 77	CES74 = 92	CES99 = 59
CES25 = 71	CES50 = 85	CES75 = 49	

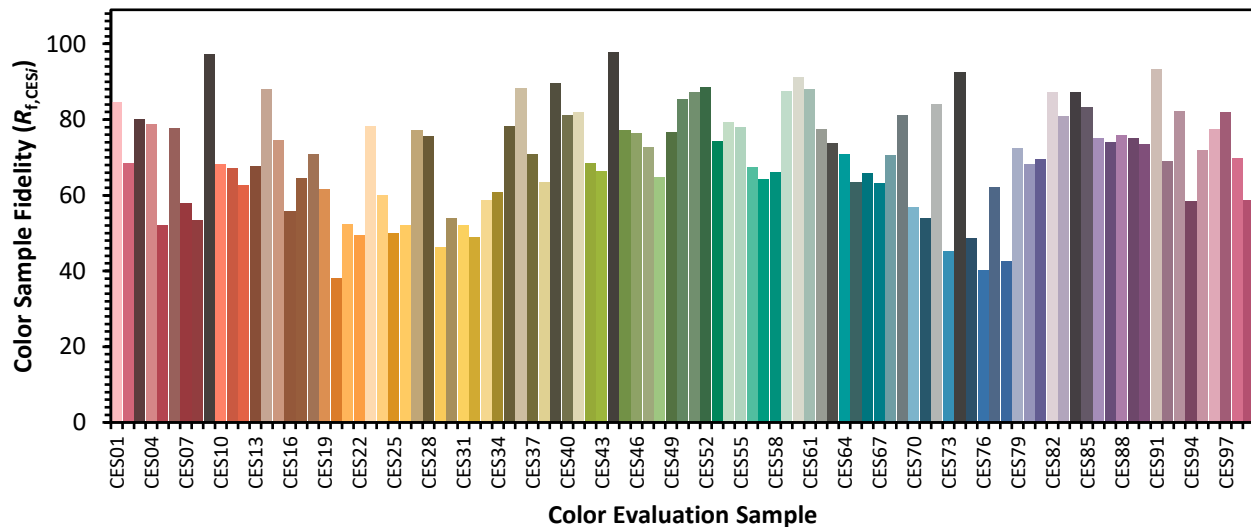

Color Rendition by Hue-Angle Bin

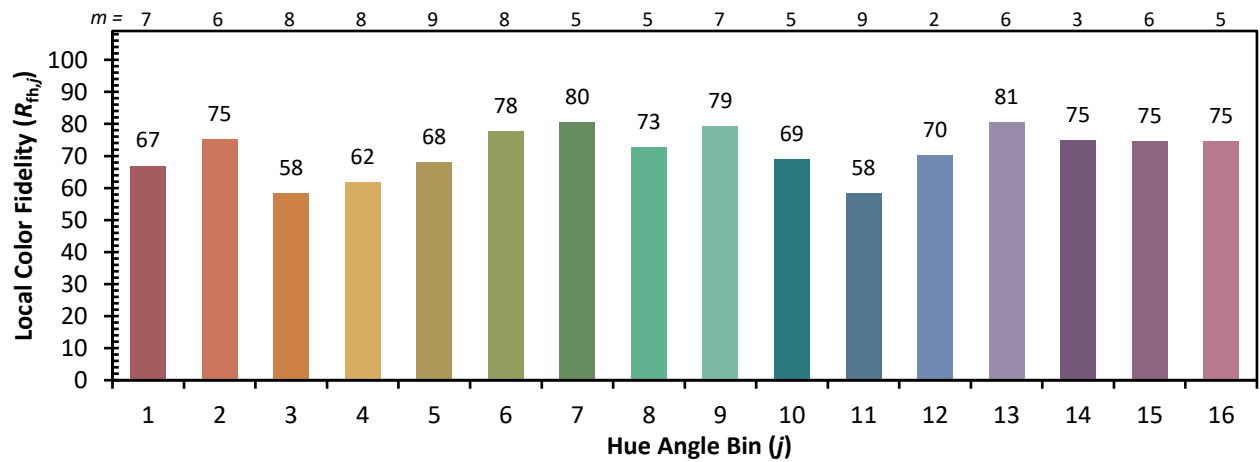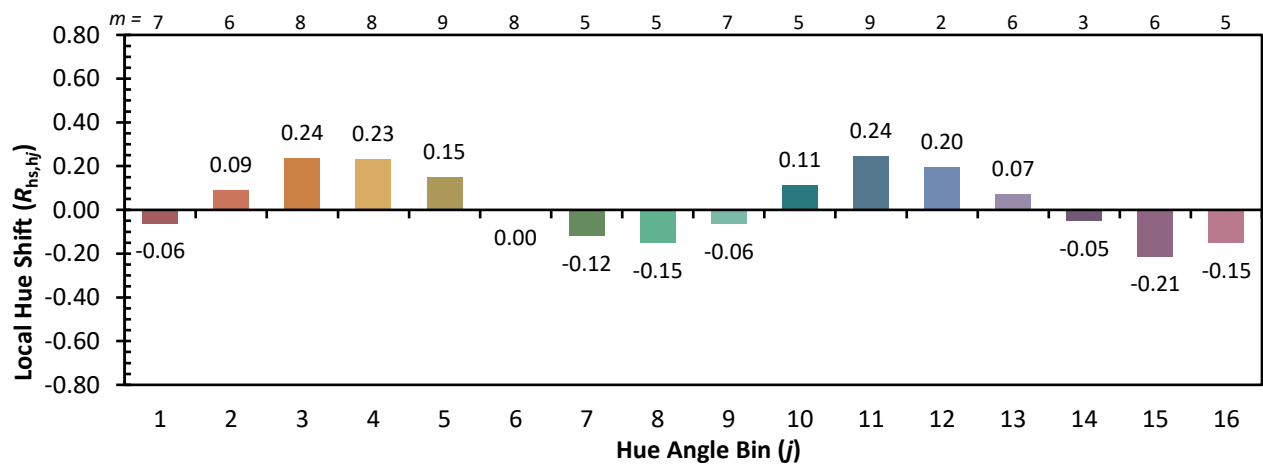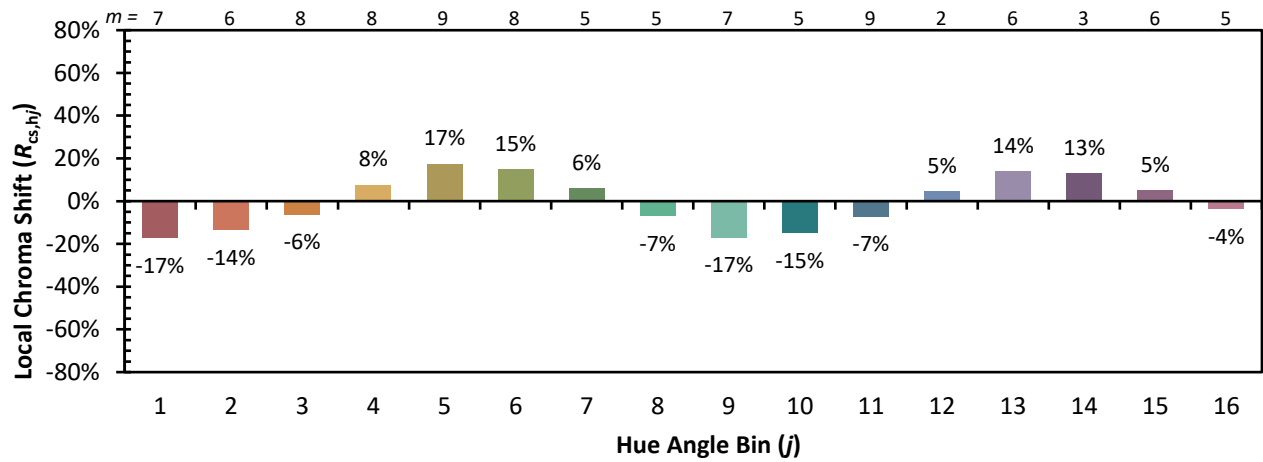

Measure Comparisons

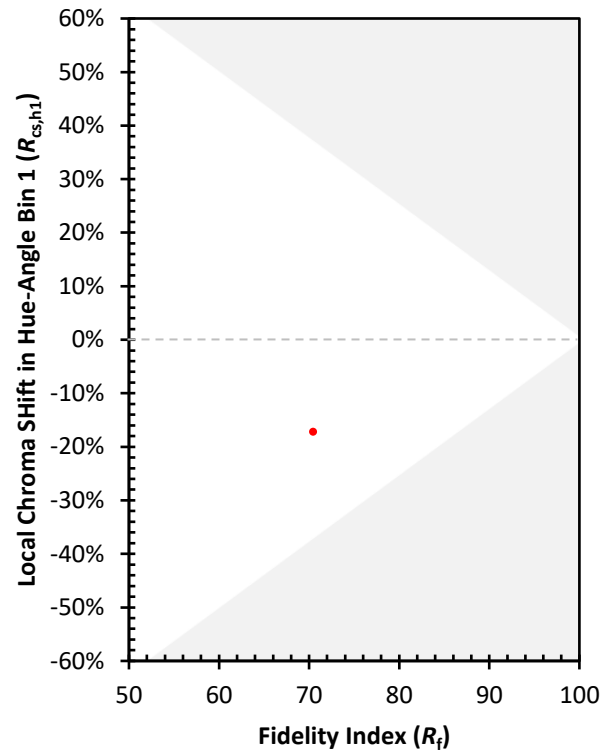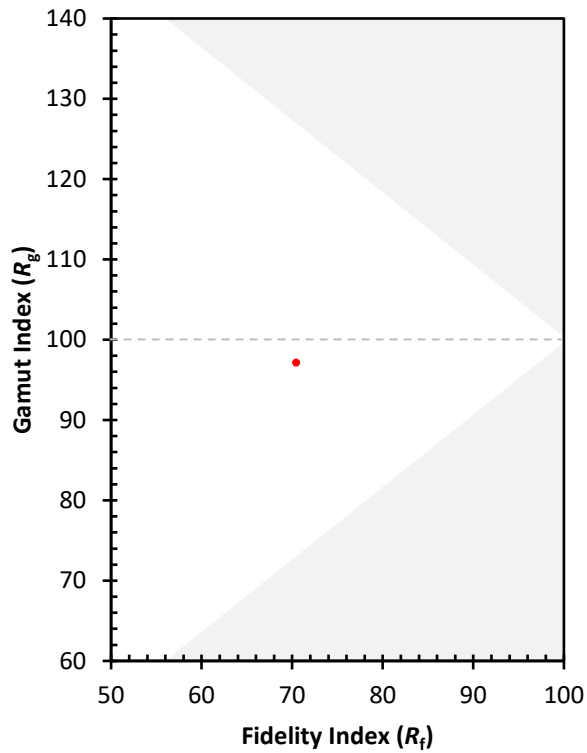

(END OF REPORT)