

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P960969

Luminaire Tested: **NVN-SB1D-760-U-SLR**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P960969
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: NVN-SB1D-760-U-SLR
Description: NAVION ROADWAY AND AREA HIGH DENSITY LED LUMINAIRE
(1) 70 CRI, 5700K, 900mA LIGHTSQUARE WITH 26 LEDS AND SPILL LIGHT
ELIMINATOR RIGHT OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10999.3 lumens
Efficiency: N/A
Efficacy: 138.2 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U0 - G3

Input Watts (W): 79.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
--- 1/2 Max cd

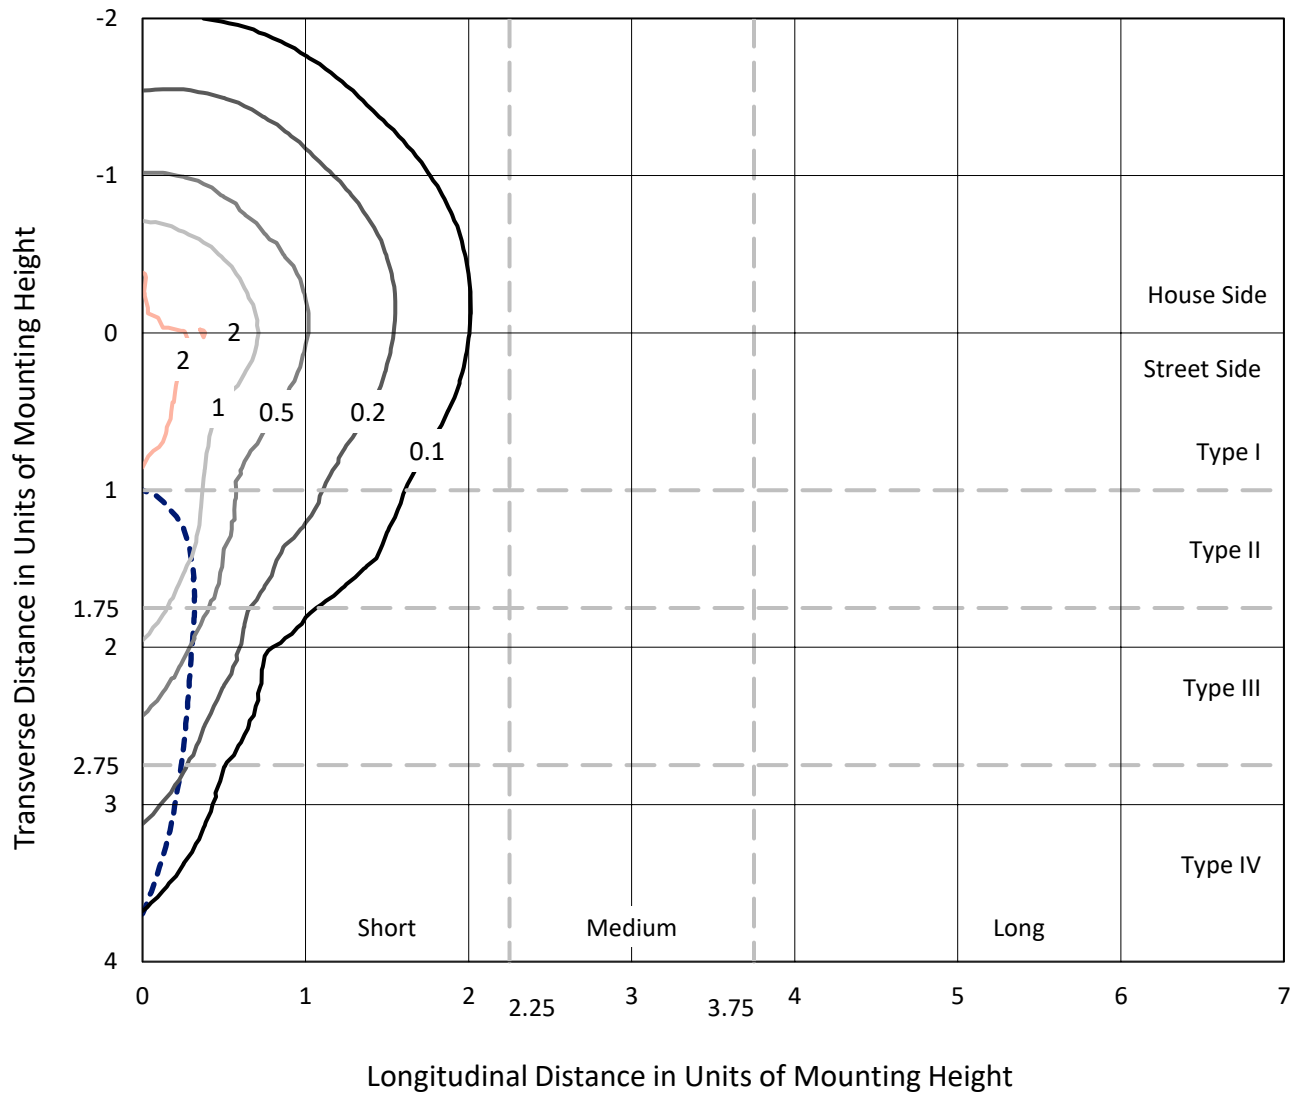


Based on 25 foot mounting height. Maximum calculated value = 3 fc
Type IV - Short - N/A

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

Luminous Intensity Polar Plot

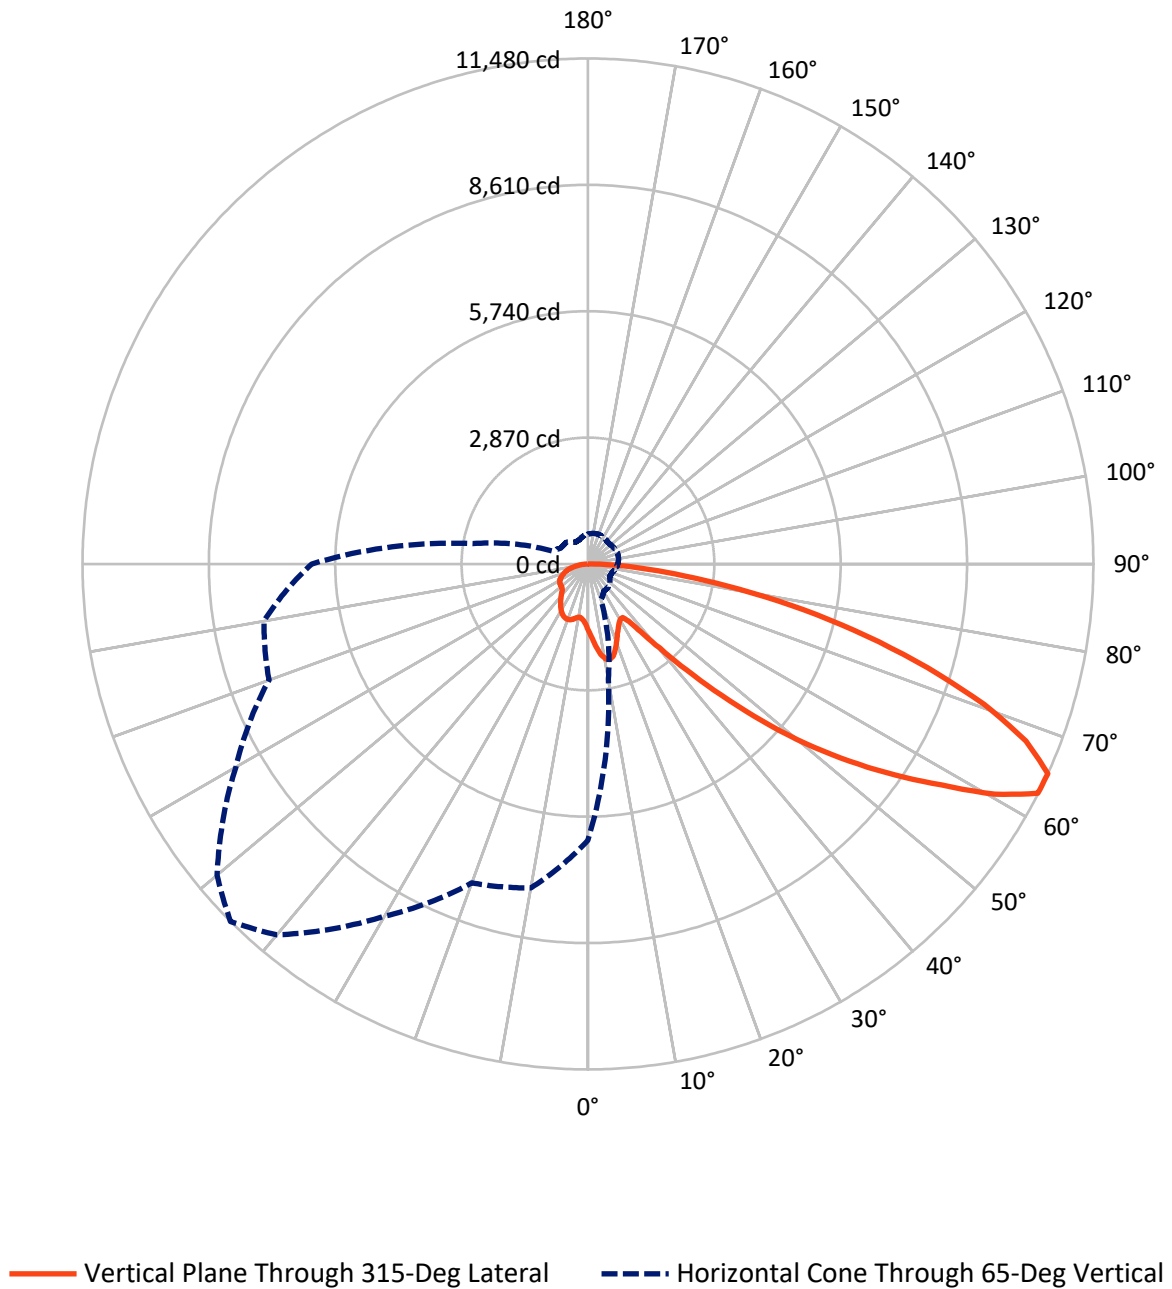

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2795.5	0.0	2795.5
	% Fixture	25.4	0.0	25.4
Street Side	Lumens	8203.8	0.0	8203.8
	% Fixture	74.6	0.0	74.6
Total	Lumens	10999.3	0.0	10999.3
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	150.0	1.4
10°-20°	471.0	4.3
20°-30°	727.5	6.6
30°-40°	922.0	8.4
40°-50°	1390.6	12.6
50°-60°	2246.7	20.4
60°-70°	2800.8	25.5
70°-80°	1836.6	16.7
80°-90°	454.1	4.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	10999.3	100.0
0°-180°	10999.3	100.0

Coefficient of Utilization



REPORT NUMBER: P960969


CATALOG NUMBER: NVN-SB1D-760-U-SLR

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	739.8	6.7			
FM	(30°-60°)	3208.3	29.2			
FH	(60°-80°)	3881.7	35.3			G2/5000
FVH	(80°-90°)	374.0	3.4			G3/500
BL	(0°-30°)	608.7	5.5	B2/1000		
BM	(30°-60°)	1350.9	12.3	B2/2500		
BH	(60°-80°)	755.8	6.9	B2/1000		G2/1000
BVH	(80°-90°)	80.0	0.7			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G3

Type IV Short

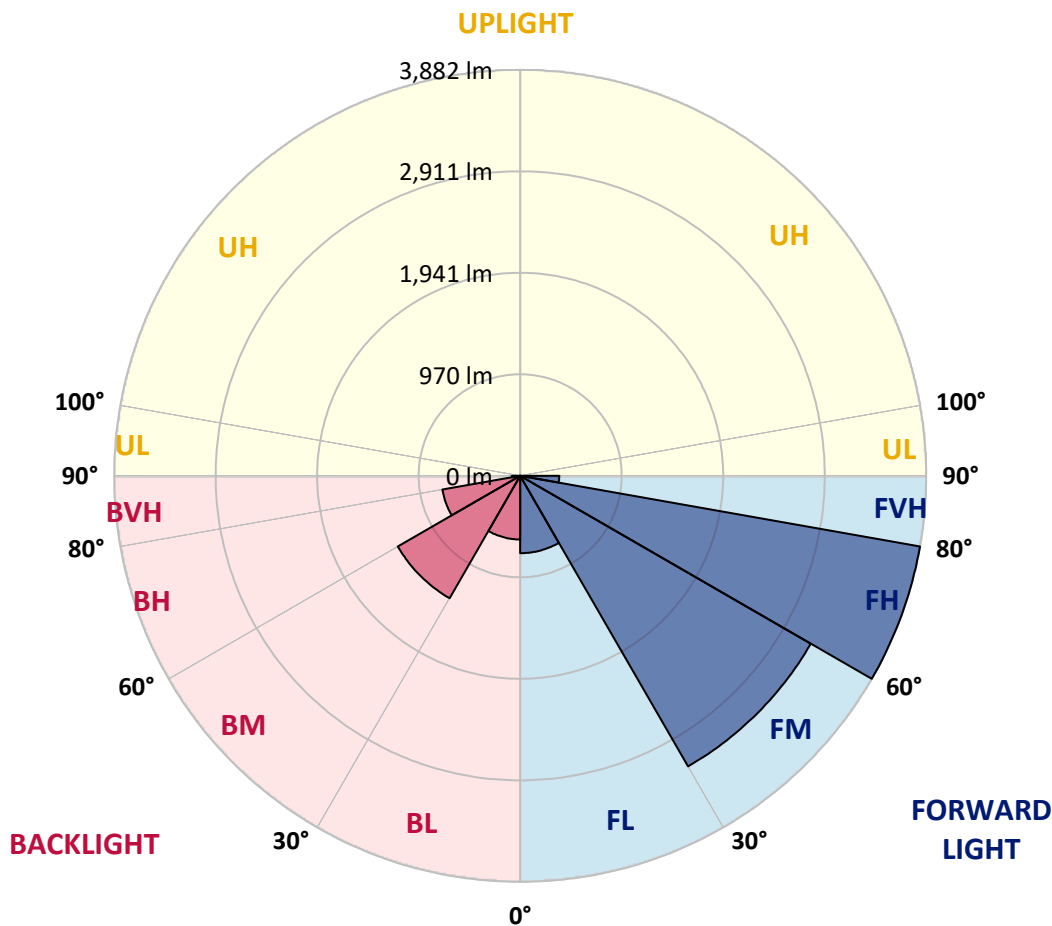

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5
2.5°	1626.6	1614.1	1601.6	1588.3	1575.0	1561.7	1548.4	1535.6	1522.8	1510.4	1496.7
5°	1749.0	1721.4	1693.9	1666.3	1638.9	1611.2	1583.6	1557.8	1532.0	1507.6	1483.5
7.5°	1872.1	1826.6	1781.1	1739.1	1697.1	1656.1	1615.2	1579.2	1543.1	1509.9	1478.8
10°	1966.4	1908.9	1851.4	1795.8	1740.3	1690.6	1640.9	1598.3	1555.5	1514.5	1481.0
12.5°	2024.1	1960.9	1897.8	1834.9	1771.9	1713.3	1654.7	1606.5	1558.2	1515.2	1483.9
15°	2059.2	1993.3	1927.5	1859.2	1791.0	1723.4	1656.0	1600.1	1544.3	1496.5	1471.6
17.5°	2078.9	2012.2	1945.3	1870.9	1796.4	1718.1	1639.7	1572.6	1505.4	1449.2	1433.9
20°	2100.7	2031.3	1961.8	1880.0	1798.2	1703.2	1608.2	1525.0	1441.8	1376.4	1372.4
22.5°	2126.0	2055.0	1984.1	1892.3	1800.5	1685.0	1569.5	1469.2	1369.0	1294.6	1302.5
25°	2158.4	2089.0	2019.5	1914.6	1809.6	1667.0	1524.4	1407.0	1289.7	1213.3	1234.8
27.5°	2202.6	2136.3	2070.0	1949.4	1828.8	1655.0	1481.1	1350.0	1218.9	1149.4	1175.6
30°	2262.1	2198.0	2133.9	1994.5	1855.0	1649.3	1443.5	1302.5	1161.3	1103.0	1123.5
32.5°	2332.3	2268.8	2205.5	2041.6	1877.7	1642.4	1407.0	1261.5	1115.8	1068.8	1077.9
35°	2417.6	2356.9	2296.1	2095.2	1894.3	1629.2	1364.4	1221.1	1077.8	1038.6	1034.8
37.5°	2561.3	2483.9	2406.4	2155.3	1904.1	1606.8	1309.4	1173.6	1037.7	1003.5	989.6
40°	2778.4	2665.5	2552.7	2231.5	1910.4	1575.8	1241.5	1116.9	992.5	961.4	940.2
42.5°	3066.2	2903.3	2740.4	2331.3	1922.2	1544.0	1165.9	1054.4	943.0	914.4	887.8
45°	3421.7	3202.0	2982.3	2462.6	1942.9	1514.3	1085.8	988.1	890.3	861.3	835.5
47.5°	3866.3	3557.1	3247.8	2602.5	1957.0	1489.8	1022.5	935.5	848.5	811.1	788.8
50°	4449.0	3982.8	3516.7	2732.2	1947.8	1463.1	978.5	900.7	822.9	773.7	747.8
52.5°	5117.8	4430.2	3742.4	2816.5	1890.6	1418.0	945.5	877.7	810.0	753.4	717.3
55°	5830.0	4826.6	3823.4	2797.9	1772.5	1343.3	914.0	861.0	808.0	755.4	701.0
57.5°	6477.7	5107.7	3737.6	2667.3	1596.9	1237.9	878.7	841.3	803.8	757.4	691.3
60°	6869.2	5177.9	3486.5	2424.0	1361.5	1101.0	840.5	811.1	781.7	751.0	682.0
62.5°	6670.4	4882.2	3094.0	2095.1	1096.2	937.3	778.2	758.6	739.1	735.3	671.4
65°	6272.6	4463.8	2655.0	1759.5	864.1	789.9	715.7	706.4	697.2	697.6	648.8
67.5°	5739.5	3965.8	2192.3	1430.8	669.3	648.2	627.1	632.3	637.3	636.1	608.7
70°	5099.0	3422.6	1746.1	1126.6	507.0	513.0	519.0	542.9	566.7	566.7	557.8
72.5°	4335.8	2833.6	1331.4	861.2	391.0	409.3	427.4	461.4	495.2	500.9	501.0
75°	3370.3	2158.4	946.5	625.0	303.7	320.1	336.6	374.5	412.6	438.8	436.5
77.5°	2408.0	1510.6	613.4	423.5	233.8	245.0	256.2	293.0	329.9	373.2	372.1
80°	1576.0	973.3	370.5	272.9	175.3	179.9	184.6	215.8	246.9	298.6	298.5
82.5°	916.1	563.3	210.5	167.9	125.3	126.1	127.0	150.0	172.9	217.1	219.5
85°	403.0	253.4	103.7	89.7	75.7	75.3	74.8	91.7	108.5	141.3	144.5
87.5°	124.7	83.0	41.2	37.2	33.2	32.8	32.4	39.3	46.1	59.8	63.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5
2.5°	1485.5	1474.5	1464.4	1454.5	1445.7	1436.9	1428.1	1419.3	1412.6	1405.7	1400.1
5°	1462.5	1441.4	1423.7	1406.2	1390.6	1375.0	1361.0	1346.7	1336.0	1325.0	1317.4
7.5°	1450.8	1422.8	1399.6	1376.4	1356.8	1337.2	1319.9	1302.7	1289.8	1276.8	1267.8
10°	1451.6	1422.1	1398.8	1375.7	1354.5	1333.4	1314.0	1294.6	1279.1	1263.6	1253.6
12.5°	1459.8	1435.7	1420.3	1405.0	1388.4	1372.0	1351.8	1331.7	1312.0	1292.2	1279.2
15°	1460.0	1448.5	1450.6	1452.7	1448.4	1444.1	1426.7	1409.2	1381.1	1353.0	1333.1
17.5°	1438.1	1442.3	1467.6	1492.9	1506.3	1519.8	1505.6	1491.6	1454.4	1417.2	1388.0
20°	1392.1	1411.8	1455.7	1499.7	1527.9	1556.1	1549.5	1542.9	1500.4	1458.0	1422.1
22.5°	1331.7	1360.9	1411.0	1461.3	1497.9	1534.5	1538.5	1542.4	1501.7	1461.1	1424.2
25°	1268.4	1302.1	1347.2	1392.4	1428.4	1464.4	1477.9	1491.3	1458.0	1424.7	1391.8
27.5°	1208.1	1240.6	1277.7	1314.7	1343.6	1372.5	1387.4	1402.5	1378.7	1355.0	1329.6
30°	1149.3	1175.2	1205.9	1236.7	1260.6	1284.7	1296.8	1309.0	1291.0	1272.9	1254.7
32.5°	1093.2	1108.4	1132.9	1157.6	1180.6	1203.7	1217.1	1230.7	1214.1	1197.5	1182.8
35°	1039.0	1043.2	1062.0	1080.7	1103.4	1126.3	1142.5	1158.8	1146.9	1135.1	1121.7
37.5°	985.0	980.4	993.8	1007.3	1029.9	1052.7	1072.8	1092.9	1087.4	1082.0	1069.6
40°	929.7	919.2	929.0	938.6	960.5	982.5	1005.6	1028.7	1030.1	1031.4	1020.8
42.5°	873.8	859.9	867.8	875.7	896.5	917.3	942.3	967.2	973.9	980.6	971.7
45°	821.8	808.4	815.0	821.7	841.4	861.2	887.0	913.0	922.5	932.1	924.1
47.5°	777.5	766.1	772.3	778.6	798.0	817.2	842.8	868.3	879.2	890.3	884.8
50°	737.7	727.6	737.5	747.2	765.5	783.6	806.5	829.3	843.6	857.7	857.3
52.5°	707.2	697.3	712.1	726.6	743.3	760.0	781.4	802.7	819.5	836.2	839.3
55°	685.2	669.5	690.3	711.0	729.1	747.1	765.8	784.4	802.2	820.0	824.2
57.5°	668.3	645.2	667.7	690.1	711.2	732.4	750.8	769.3	787.2	805.1	809.3
60°	652.3	622.5	642.2	661.7	686.0	710.3	729.0	747.8	765.8	783.8	788.4
62.5°	634.2	597.0	609.4	621.9	650.2	678.4	698.5	718.5	735.0	751.5	755.9
65°	609.3	569.7	574.5	579.2	609.6	639.9	659.1	678.1	692.7	707.2	711.8
67.5°	575.7	542.7	541.3	539.8	567.7	595.7	614.0	632.0	644.6	657.1	661.5
70°	534.3	510.9	505.6	500.4	525.0	549.6	565.3	581.0	592.2	603.6	607.9
72.5°	484.9	468.8	461.1	453.6	472.9	492.3	506.5	520.6	531.7	542.7	547.9
75°	424.2	411.7	404.5	397.1	411.5	425.9	438.7	451.5	461.7	471.7	477.0
77.5°	362.1	352.2	344.7	337.3	349.0	360.7	371.8	382.7	393.4	404.0	409.0
80°	290.2	281.8	275.5	269.3	279.0	288.7	298.1	307.3	315.4	323.4	330.0
82.5°	215.5	211.4	206.9	202.5	201.7	200.9	197.7	194.4	211.6	228.8	240.1
85°	140.1	135.8	130.9	126.0	121.8	117.6	108.5	99.5	115.6	131.7	145.7
87.5°	62.1	60.4	59.4	58.5	58.3	58.1	51.4	44.4	51.1	57.9	63.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5
2.5°	1394.7	1390.4	1386.1	1382.1	1378.1	1373.2	1378.1	1382.1	1386.1	1390.4	1394.7
5°	1309.8	1304.4	1299.0	1294.9	1290.8	1286.7	1290.8	1294.9	1299.0	1304.4	1309.8
7.5°	1258.7	1252.6	1246.4	1242.7	1239.0	1236.3	1239.0	1242.7	1246.4	1252.6	1258.7
10°	1243.3	1237.5	1231.5	1228.5	1225.3	1224.1	1225.3	1228.5	1231.5	1237.5	1243.3
12.5°	1266.1	1259.5	1253.1	1250.4	1247.7	1247.2	1247.7	1250.4	1253.1	1259.5	1266.1
15°	1313.3	1304.2	1295.2	1291.7	1288.2	1287.9	1288.2	1291.7	1295.2	1304.2	1313.3
17.5°	1358.7	1345.2	1331.7	1327.3	1322.9	1322.1	1322.9	1327.3	1331.7	1345.2	1358.7
20°	1386.2	1369.0	1351.8	1346.2	1340.7	1339.0	1340.7	1346.2	1351.8	1369.0	1386.2
22.5°	1387.2	1369.1	1350.8	1344.8	1338.6	1336.1	1338.6	1344.8	1350.8	1369.1	1387.2
25°	1359.1	1343.4	1327.7	1321.9	1316.2	1312.8	1316.2	1321.9	1327.7	1343.4	1359.1
27.5°	1304.1	1293.6	1283.0	1280.3	1277.8	1276.8	1277.8	1280.3	1283.0	1293.6	1304.1
30°	1236.4	1230.9	1225.5	1225.5	1225.5	1226.4	1225.5	1225.5	1225.5	1230.9	1236.4
32.5°	1168.3	1164.8	1161.2	1161.7	1162.2	1163.1	1162.2	1161.7	1161.2	1164.8	1168.3
35°	1108.2	1102.9	1097.5	1096.3	1095.2	1094.6	1095.2	1096.3	1097.5	1102.9	1108.2
37.5°	1057.2	1047.3	1037.6	1032.5	1027.3	1024.4	1027.3	1032.5	1037.6	1047.3	1057.2
40°	1010.3	996.1	982.0	972.3	962.8	957.0	962.8	972.3	982.0	996.1	1010.3
42.5°	962.9	945.2	927.4	913.5	899.4	890.3	899.4	913.5	927.4	945.2	962.9
45°	916.1	895.8	875.7	859.3	842.9	832.3	842.9	859.3	875.7	895.8	916.1
47.5°	879.1	861.2	843.2	828.0	812.8	802.7	812.8	828.0	843.2	861.2	879.1
50°	857.1	842.8	828.3	814.3	800.2	790.5	800.2	814.3	828.3	842.8	857.1
52.5°	842.2	830.6	818.8	806.3	793.7	784.6	793.7	806.3	818.8	830.6	842.2
55°	828.3	818.2	807.9	796.8	785.9	777.8	785.9	796.8	807.9	818.2	828.3
57.5°	813.5	803.3	792.9	782.0	771.0	762.6	771.0	782.0	792.9	803.3	813.5
60°	793.1	783.0	773.0	761.7	750.4	741.7	750.4	761.7	773.0	783.0	793.1
62.5°	760.4	751.3	742.2	730.3	718.5	708.1	718.5	730.3	742.2	751.3	760.4
65°	716.3	707.6	698.7	687.3	675.9	666.9	675.9	687.3	698.7	707.6	716.3
67.5°	666.0	657.9	650.0	639.2	628.5	620.4	628.5	639.2	650.0	657.9	666.0
70°	612.2	605.7	599.1	588.9	578.6	569.4	578.6	588.9	599.1	605.7	612.2
72.5°	553.0	547.6	542.1	532.3	522.6	513.6	522.6	532.3	542.1	547.6	553.0
75°	482.5	479.7	477.0	468.9	460.7	452.1	460.7	468.9	477.0	479.7	482.5
77.5°	413.9	410.2	406.4	398.1	389.9	383.0	389.9	398.1	406.4	410.2	413.9
80°	336.6	335.0	333.4	322.4	311.2	298.3	311.2	322.4	333.4	335.0	336.6
82.5°	251.3	250.6	249.9	240.5	231.1	222.8	231.1	240.5	249.9	250.6	251.3
85°	159.6	158.5	157.2	150.0	142.7	135.2	142.7	150.0	157.2	158.5	159.6
87.5°	69.2	67.8	66.3	62.5	58.7	55.1	58.7	62.5	66.3	67.8	69.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5
2.5°	1400.1	1405.7	1412.6	1419.3	1428.1	1436.9	1445.7	1454.5	1464.4	1474.5	1485.5
5°	1317.4	1325.0	1336.0	1346.7	1361.0	1375.0	1390.6	1406.2	1423.7	1441.4	1462.5
7.5°	1267.8	1276.8	1289.8	1302.7	1319.9	1337.2	1356.8	1376.4	1399.6	1422.8	1450.8
10°	1253.6	1263.6	1279.1	1294.6	1314.0	1333.4	1354.5	1375.7	1398.8	1422.1	1451.6
12.5°	1279.2	1292.2	1312.0	1331.7	1351.8	1372.0	1388.4	1405.0	1420.3	1435.7	1459.8
15°	1333.1	1353.0	1381.1	1409.2	1426.7	1444.1	1448.4	1452.7	1450.6	1448.5	1460.0
17.5°	1388.0	1417.2	1454.4	1491.6	1505.6	1519.8	1506.3	1492.9	1467.6	1442.3	1438.1
20°	1422.1	1458.0	1500.4	1542.9	1549.5	1556.1	1527.9	1499.7	1455.7	1411.8	1392.1
22.5°	1424.2	1461.1	1501.7	1542.4	1538.5	1534.5	1497.9	1461.3	1411.0	1360.9	1331.7
25°	1391.8	1424.7	1458.0	1491.3	1477.9	1464.4	1428.4	1392.4	1347.2	1302.1	1268.4
27.5°	1329.6	1355.0	1378.7	1402.5	1387.4	1372.5	1343.6	1314.7	1277.7	1240.6	1208.1
30°	1254.7	1272.9	1291.0	1309.0	1296.8	1284.7	1260.6	1236.7	1205.9	1175.2	1149.3
32.5°	1182.8	1197.5	1214.1	1230.7	1217.1	1203.7	1180.6	1157.6	1132.9	1108.4	1093.2
35°	1121.7	1135.1	1146.9	1158.8	1142.5	1126.3	1103.4	1080.7	1062.0	1043.2	1039.0
37.5°	1069.6	1082.0	1087.4	1092.9	1072.8	1052.7	1029.9	1007.3	993.8	980.4	985.0
40°	1020.8	1031.4	1030.1	1028.7	1005.6	982.5	960.5	938.6	929.0	919.2	929.7
42.5°	971.7	980.6	973.9	967.2	942.3	917.3	896.5	875.7	867.8	859.9	873.8
45°	924.1	932.1	922.5	913.0	887.0	861.2	841.4	821.7	815.0	808.4	821.8
47.5°	884.8	890.3	879.2	868.3	842.8	817.2	798.0	778.6	772.3	766.1	777.5
50°	857.3	857.7	843.6	829.3	806.5	783.6	765.5	747.2	737.5	727.6	737.7
52.5°	839.3	836.2	819.5	802.7	781.4	760.0	743.3	726.6	712.1	697.3	707.2
55°	824.2	820.0	802.2	784.4	765.8	747.1	729.1	711.0	690.3	669.5	685.2
57.5°	809.3	805.1	787.2	769.3	750.8	732.4	711.2	690.1	667.7	645.2	668.3
60°	788.4	783.8	765.8	747.8	729.0	710.3	686.0	661.7	642.2	622.5	652.3
62.5°	755.9	751.5	735.0	718.5	698.5	678.4	650.2	621.9	609.4	597.0	634.2
65°	711.8	707.2	692.7	678.1	659.1	639.9	609.6	579.2	574.5	569.7	609.3
67.5°	661.5	657.1	644.6	632.0	614.0	595.7	567.7	539.8	541.3	542.7	575.7
70°	607.9	603.6	592.2	581.0	565.3	549.6	525.0	500.4	505.6	510.9	534.3
72.5°	547.9	542.7	531.7	520.6	506.5	492.3	472.9	453.6	461.1	468.8	484.9
75°	477.0	471.7	461.7	451.5	438.7	425.9	411.5	397.1	404.5	411.7	424.2
77.5°	409.0	404.0	393.4	382.7	371.8	360.7	349.0	337.3	344.7	352.2	362.1
80°	330.0	323.4	315.4	307.3	298.1	288.7	279.0	269.3	275.5	281.8	290.2
82.5°	240.1	228.8	211.6	194.4	197.7	200.9	201.7	202.5	206.9	211.4	215.5
85°	145.7	131.7	115.6	99.5	108.5	117.6	121.8	126.0	130.9	135.8	140.1
87.5°	63.6	57.9	51.1	44.4	51.4	58.1	58.3	58.5	59.4	60.4	62.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5
2.5°	1496.7	1510.4	1522.8	1535.6	1548.4	1561.7	1575.0	1588.3	1601.6	1614.1	1626.6
5°	1483.5	1507.6	1532.0	1557.8	1583.6	1611.2	1638.9	1666.3	1693.9	1721.4	1749.0
7.5°	1478.8	1509.9	1543.1	1579.2	1615.2	1656.1	1697.1	1739.1	1781.1	1826.6	1872.1
10°	1481.0	1514.5	1555.5	1598.3	1640.9	1690.6	1740.3	1795.8	1851.4	1908.9	1966.4
12.5°	1483.9	1515.2	1558.2	1606.5	1654.7	1713.3	1771.9	1834.9	1897.8	1960.9	2024.1
15°	1471.6	1496.5	1544.3	1600.1	1656.0	1723.4	1791.0	1859.2	1927.5	1993.3	2059.2
17.5°	1433.9	1449.2	1505.4	1572.6	1639.7	1718.1	1796.4	1870.9	1945.3	2012.2	2078.9
20°	1372.4	1376.4	1441.8	1525.0	1608.2	1703.2	1798.2	1880.0	1961.8	2031.3	2100.7
22.5°	1302.5	1294.6	1369.0	1469.2	1569.5	1685.0	1800.5	1892.3	1984.1	2055.0	2126.0
25°	1234.8	1213.3	1289.7	1407.0	1524.4	1667.0	1809.6	1914.6	2019.5	2089.0	2158.4
27.5°	1175.6	1149.4	1218.9	1350.0	1481.1	1655.0	1828.8	1949.4	2070.0	2136.3	2202.6
30°	1123.5	1103.0	1161.3	1302.5	1443.5	1649.3	1855.0	1994.5	2133.9	2198.0	2262.1
32.5°	1077.9	1068.8	1115.8	1261.5	1407.0	1642.4	1877.7	2041.6	2205.5	2268.8	2332.3
35°	1034.8	1038.6	1077.8	1221.1	1364.4	1629.2	1894.3	2095.2	2296.1	2356.9	2417.6
37.5°	989.6	1003.5	1037.7	1173.6	1309.4	1606.8	1904.1	2155.3	2406.4	2483.9	2561.3
40°	940.2	961.4	992.5	1116.9	1241.5	1575.8	1910.4	2231.5	2552.7	2665.5	2778.4
42.5°	887.8	914.4	943.0	1054.4	1165.9	1544.0	1922.2	2331.3	2740.4	2903.3	3066.2
45°	835.5	861.3	890.3	988.1	1085.8	1514.3	1942.9	2462.6	2982.3	3202.0	3421.7
47.5°	788.8	811.1	848.5	935.5	1022.5	1489.8	1957.0	2602.5	3247.8	3557.1	3866.3
50°	747.8	773.7	822.9	900.7	978.5	1463.1	1947.8	2732.2	3516.7	3982.8	4449.0
52.5°	717.3	753.4	810.0	877.7	945.5	1418.0	1890.6	2816.5	3742.4	4430.2	5117.8
55°	701.0	755.4	808.0	861.0	914.0	1343.3	1772.5	2797.9	3823.4	4826.6	5830.0
57.5°	691.3	757.4	803.8	841.3	878.7	1237.9	1596.9	2667.3	3737.6	5107.7	6477.7
60°	682.0	751.0	781.7	811.1	840.5	1101.0	1361.5	2424.0	3486.5	5177.9	6869.2
62.5°	671.4	735.3	739.1	758.6	778.2	937.3	1096.2	2095.1	3094.0	4882.2	6670.4
65°	648.8	697.6	697.2	706.4	715.7	789.9	864.1	1759.5	2655.0	4463.8	6272.6
67.5°	608.7	636.1	637.3	632.3	627.1	648.2	669.3	1430.8	2192.3	3965.8	5739.5
70°	557.8	566.7	566.7	542.9	519.0	513.0	507.0	1126.6	1746.1	3422.6	5099.0
72.5°	501.0	500.9	495.2	461.4	427.4	409.3	391.0	861.2	1331.4	2833.6	4335.8
75°	436.5	438.8	412.6	374.5	336.6	320.1	303.7	625.0	946.5	2158.4	3370.3
77.5°	372.1	373.2	329.9	293.0	256.2	245.0	233.8	423.5	613.4	1510.6	2408.0
80°	298.5	298.6	246.9	215.8	184.6	179.9	175.3	272.9	370.5	973.3	1576.0
82.5°	219.5	217.1	172.9	150.0	127.0	126.1	125.3	167.9	210.5	563.3	916.1
85°	144.5	141.3	108.5	91.7	74.8	75.3	75.7	89.7	103.7	253.4	403.0
87.5°	63.9	59.8	46.1	39.3	32.4	32.8	33.2	37.2	41.2	83.0	124.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5
2.5°	1632.7	1638.9	1647.7	1656.4	1661.6	1666.9	1669.5	1672.1	1671.0	1672.1	1669.5
5°	1770.6	1792.1	1813.5	1834.9	1846.5	1858.1	1865.1	1872.3	1877.6	1872.3	1865.1
7.5°	1907.1	1942.1	1973.6	2005.1	2024.1	2043.1	2053.4	2063.5	2068.6	2063.5	2053.4
10°	2007.8	2049.3	2086.2	2123.2	2145.6	2167.9	2177.8	2187.8	2191.6	2187.8	2177.8
12.5°	2069.1	2113.9	2147.4	2180.7	2196.9	2213.2	2218.6	2224.0	2224.7	2224.0	2218.6
15°	2098.0	2136.7	2157.6	2178.6	2179.3	2179.9	2174.0	2168.2	2161.4	2168.2	2174.0
17.5°	2105.1	2131.3	2131.7	2132.1	2108.5	2085.1	2063.5	2041.9	2026.7	2041.9	2063.5
20°	2109.9	2119.0	2091.4	2063.8	2012.0	1960.1	1922.3	1884.6	1861.3	1884.6	1922.3
22.5°	2114.0	2102.1	2045.0	1987.9	1911.5	1835.2	1787.9	1740.7	1715.0	1740.7	1787.9
25°	2120.7	2083.0	1996.3	1909.6	1816.9	1724.3	1674.5	1624.9	1600.7	1624.9	1674.5
27.5°	2135.2	2067.6	1952.7	1837.9	1735.2	1632.5	1583.6	1534.8	1511.9	1534.8	1583.6
30°	2161.5	2061.0	1919.6	1778.2	1671.2	1564.1	1518.8	1473.5	1452.1	1473.5	1518.8
32.5°	2194.5	2056.9	1897.0	1737.0	1636.4	1535.9	1500.3	1464.6	1449.2	1464.6	1500.3
35°	2249.1	2080.5	1913.9	1747.2	1677.4	1607.6	1599.3	1591.0	1589.7	1591.0	1599.3
37.5°	2363.0	2164.7	2013.3	1861.8	1857.2	1852.7	1890.7	1928.6	1948.3	1928.6	1890.7
40°	2562.7	2347.0	2234.4	2121.8	2201.3	2280.8	2373.1	2465.3	2511.4	2465.3	2373.1
42.5°	2852.3	2638.4	2573.5	2508.6	2682.0	2855.4	3023.2	3191.1	3289.6	3191.1	3023.2
45°	3229.6	3037.3	3008.7	2980.0	3257.9	3535.7	3811.6	4087.4	4254.9	4087.4	3811.6
47.5°	3679.3	3492.3	3486.5	3480.7	3881.6	4282.2	4686.0	5089.7	5326.8	5089.7	4686.0
50°	4218.1	3987.1	3988.2	3989.1	4505.7	5022.2	5555.2	6088.2	6410.5	6088.2	5555.2
52.5°	4838.2	4558.7	4530.4	4502.1	5119.1	5736.1	6395.6	7055.0	7441.2	7055.0	6395.6
55°	5553.8	5277.5	5167.2	5057.0	5743.8	6430.4	7216.5	8002.7	8462.1	8002.7	7216.5
57.5°	6327.3	6176.8	5955.8	5734.7	6428.1	7121.5	8011.9	8902.3	9471.9	8902.3	8011.9
60°	7102.8	7336.5	7062.0	6787.6	7443.8	8100.0	9053.3	10006.6	10622.3	10006.6	9053.3
62.5°	7308.9	7947.4	7916.5	7885.4	8486.6	9087.8	9994.8	10901.7	11470.8	10901.7	9994.8
65°	6871.8	7471.0	7589.6	7708.1	8472.0	9236.1	10115.5	10995.0	11479.5	10995.0	10115.5
67.5°	6309.4	6879.4	6934.9	6990.5	7786.4	8582.3	9465.7	10348.9	10728.5	10348.9	9465.7
70°	5718.9	6338.9	6363.7	6388.6	7100.4	7812.1	8572.3	9332.4	9543.4	9332.4	8572.3
72.5°	5047.2	5758.7	5776.5	5794.3	6351.2	6908.1	7477.4	8046.7	8068.0	8046.7	7477.4
75°	4106.6	4842.9	4909.0	4975.1	5408.3	5841.6	6242.4	6643.1	6535.8	6643.1	6242.4
77.5°	3095.3	3782.7	3877.3	3971.9	4301.3	4630.6	4914.9	5199.1	5014.6	5199.1	4914.9
80°	2154.2	2732.4	2850.0	2967.7	3216.4	3465.0	3614.4	3763.5	3466.7	3763.5	3614.4
82.5°	1311.5	1706.8	1838.1	1969.5	2140.8	2312.0	2374.2	2436.4	2203.1	2436.4	2374.2
85°	612.8	822.7	934.4	1046.1	1186.8	1327.5	1362.8	1398.2	1211.2	1398.2	1362.8
87.5°	195.3	265.8	328.1	390.5	460.8	531.2	534.2	537.1	451.0	537.1	534.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P960969

CATALOG NUMBER: NVN-SB1D-760-U-SLR

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5	1512.5
2.5°	1666.9	1661.6	1656.4	1647.7	1638.9	1632.7	1626.6
5°	1858.1	1846.5	1834.9	1813.5	1792.1	1770.6	1749.0
7.5°	2043.1	2024.1	2005.1	1973.6	1942.1	1907.1	1872.1
10°	2167.9	2145.6	2123.2	2086.2	2049.3	2007.8	1966.4
12.5°	2213.2	2196.9	2180.7	2147.4	2113.9	2069.1	2024.1
15°	2179.9	2179.3	2178.6	2157.6	2136.7	2098.0	2059.2
17.5°	2085.1	2108.5	2132.1	2131.7	2131.3	2105.1	2078.9
20°	1960.1	2012.0	2063.8	2091.4	2119.0	2109.9	2100.7
22.5°	1835.2	1911.5	1987.9	2045.0	2102.1	2114.0	2126.0
25°	1724.3	1816.9	1909.6	1996.3	2083.0	2120.7	2158.4
27.5°	1632.5	1735.2	1837.9	1952.7	2067.6	2135.2	2202.6
30°	1564.1	1671.2	1778.2	1919.6	2061.0	2161.5	2262.1
32.5°	1535.9	1636.4	1737.0	1897.0	2056.9	2194.5	2332.3
35°	1607.6	1677.4	1747.2	1913.9	2080.5	2249.1	2417.6
37.5°	1852.7	1857.2	1861.8	2013.3	2164.7	2363.0	2561.3
40°	2280.8	2201.3	2121.8	2234.4	2347.0	2562.7	2778.4
42.5°	2855.4	2682.0	2508.6	2573.5	2638.4	2852.3	3066.2
45°	3535.7	3257.9	2980.0	3008.7	3037.3	3229.6	3421.7
47.5°	4282.2	3881.6	3480.7	3486.5	3492.3	3679.3	3866.3
50°	5022.2	4505.7	3989.1	3988.2	3987.1	4218.1	4449.0
52.5°	5736.1	5119.1	4502.1	4530.4	4558.7	4838.2	5117.8
55°	6430.4	5743.8	5057.0	5167.2	5277.5	5553.8	5830.0
57.5°	7121.5	6428.1	5734.7	5955.8	6176.8	6327.3	6477.7
60°	8100.0	7443.8	6787.6	7062.0	7336.5	7102.8	6869.2
62.5°	9087.8	8486.6	7885.4	7916.5	7947.4	7308.9	6670.4
65°	9236.1	8472.0	7708.1	7589.6	7471.0	6871.8	6272.6
67.5°	8582.3	7786.4	6990.5	6934.9	6879.4	6309.4	5739.5
70°	7812.1	7100.4	6388.6	6363.7	6338.9	5718.9	5099.0
72.5°	6908.1	6351.2	5794.3	5776.5	5758.7	5047.2	4335.8
75°	5841.6	5408.3	4975.1	4909.0	4842.9	4106.6	3370.3
77.5°	4630.6	4301.3	3971.9	3877.3	3782.7	3095.3	2408.0
80°	3465.0	3216.4	2967.7	2850.0	2732.4	2154.2	1576.0
82.5°	2312.0	2140.8	1969.5	1838.1	1706.8	1311.5	916.1
85°	1327.5	1186.8	1046.1	934.4	822.7	612.8	403.0
87.5°	531.2	460.8	390.5	328.1	265.8	195.3	124.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)