

Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: STREETWORKS

Report Number: P1208536

Luminaire Tested: UPW-SA1-070-730-U-SLR

Issue Date: 11/4/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1208536  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2303-947-1)  
Test Lab: INNOVATIONS CENTER  
Issue Date: 2/20/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: STREETWORKS  
Catalog Number: UPW-SA1-070-730-U-SLR  
Description: UNDERPASS WALL MOUNT LUMINAIRE  
(1) 70 CRI, 3000K, 1200mA LIGHTSQUARE WITH 16 LEDS AND SPILL LIGHT ELIMINATOR RIGH OPTICS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7248 lumens  
Efficiency: N/A  
Efficacy: 108.2 lumens/watt  
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')  
IES Classification: Type III - Short  
BUG Rating: B1 - U0 - G2

Input Watts (W): 67  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT




REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

### Iso-Footcandle Lines of Horizontal Illumination

× Max cd  
 - - - 1/2 Max cd

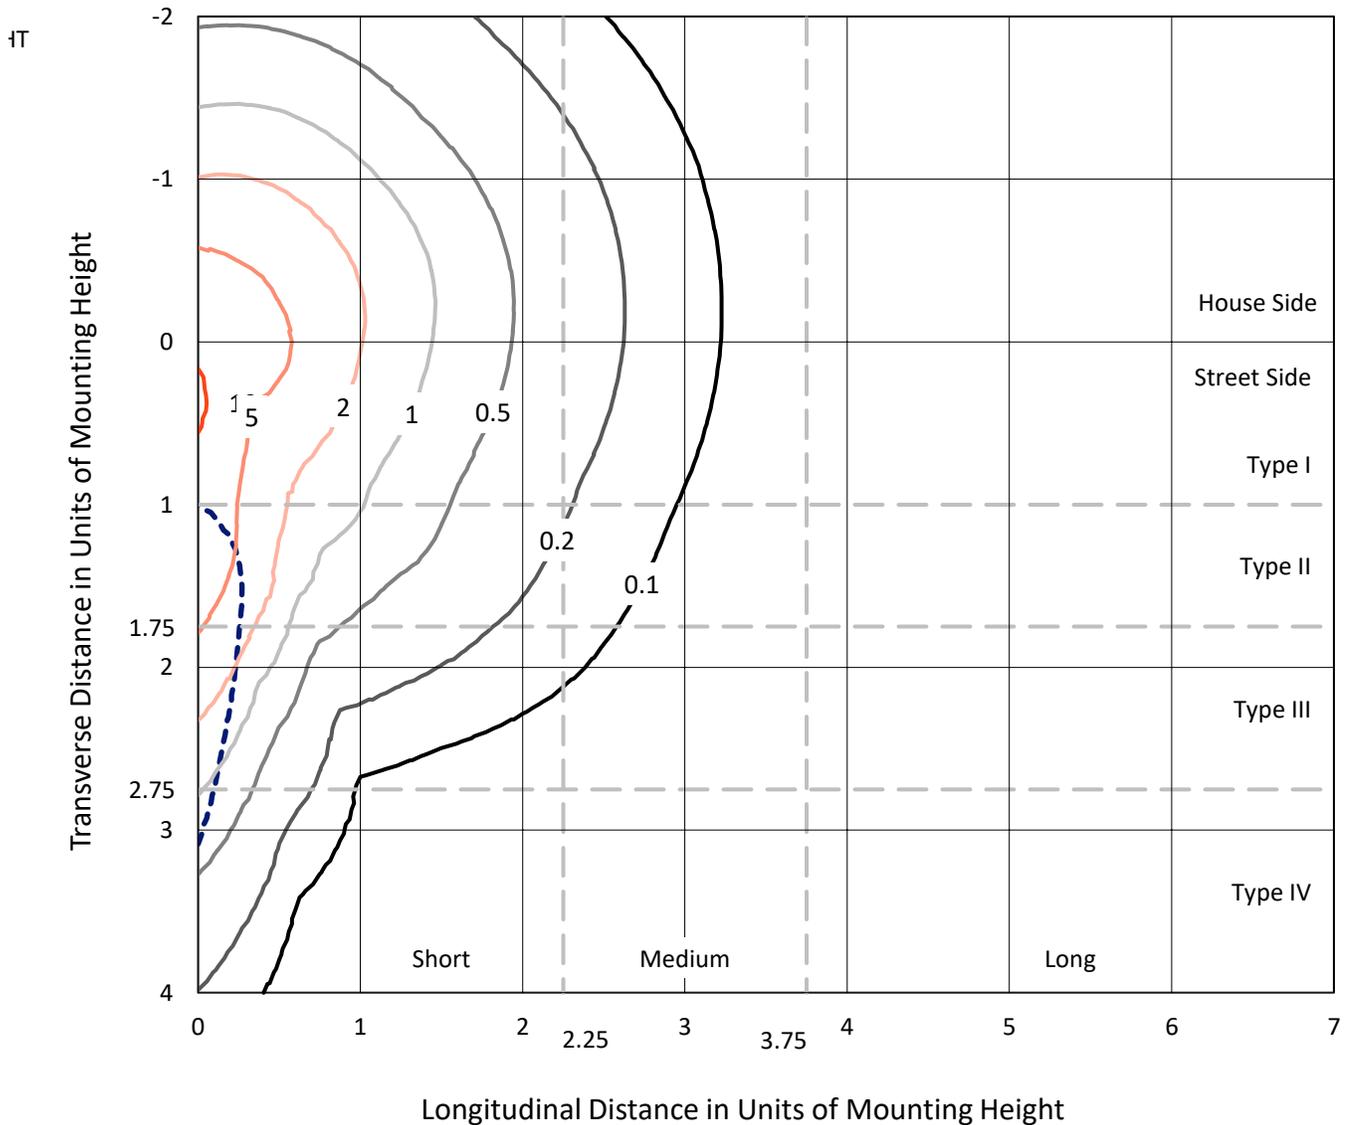


Based on 10 foot mounting height. Maximum calculated value = 11 fc  
 Type III - Short - N/A

REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

### Luminous Intensity Polar Plot

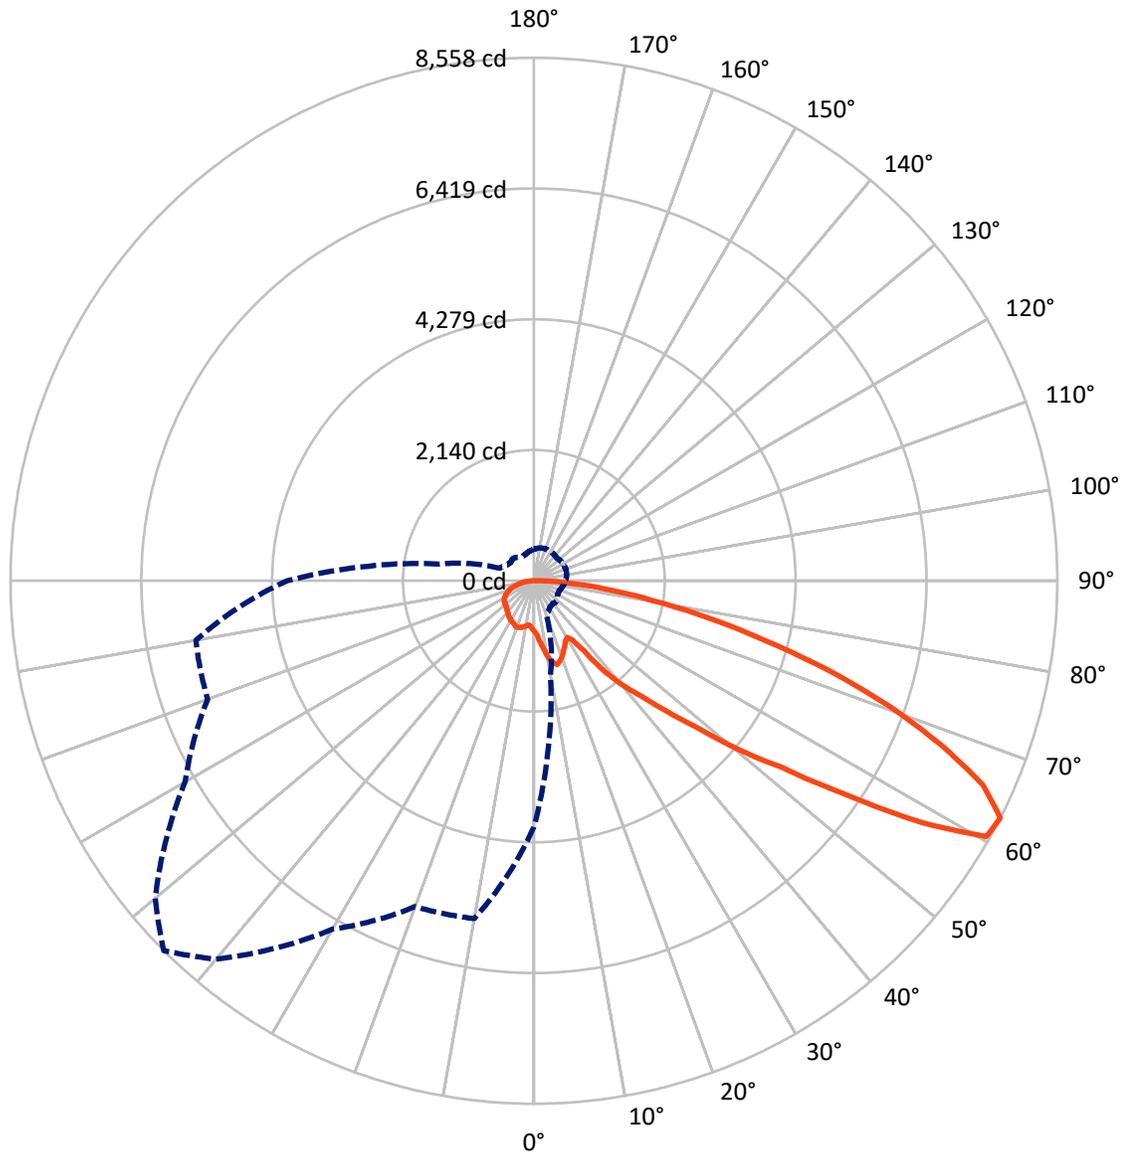

— Vertical Plane Through 315-Deg Lateral    - - - Horizontal Cone Through 62.5-Deg Vertical

REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	1776.3	0.0	1776.3
	% Fixture	24.5	0.0	24.5
<b>Street Side</b>	Lumens	5471.8	0.0	5471.8
	% Fixture	75.5	0.0	75.5
<b>Total</b>	Lumens	7248.0	0.0	7248.0
	% Fixture	100.0	0.0	100.0

**Coefficient of Utilization**

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	82.4	1.1
10°-20°	278.1	3.8
20°-30°	452.3	6.2
30°-40°	616.8	8.5
40°-50°	934.0	12.9
50°-60°	1606.1	22.2
60°-70°	1883.6	26.0
70°-80°	1123.4	15.5
80°-90°	271.4	3.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	7248.0	100.0
0°-180°	7248.0	100.0



REPORT NUMBER: P1208536


CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	459.4	6.3			
FM	(30°-60°)	2285.2	31.5			
FH	(60°-80°)	2517.5	34.7			G2/5000
FVH	(80°-90°)	209.7	2.9			G2/225
BL	(0°-30°)	353.3	4.9	B1/500		
BM	(30°-60°)	871.8	12.0	B1/1000		
BH	(60°-80°)	489.5	6.8	B1/500		G1/500
BVH	(80°-90°)	61.7	0.9			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B1-U0-G2**

Type III Short

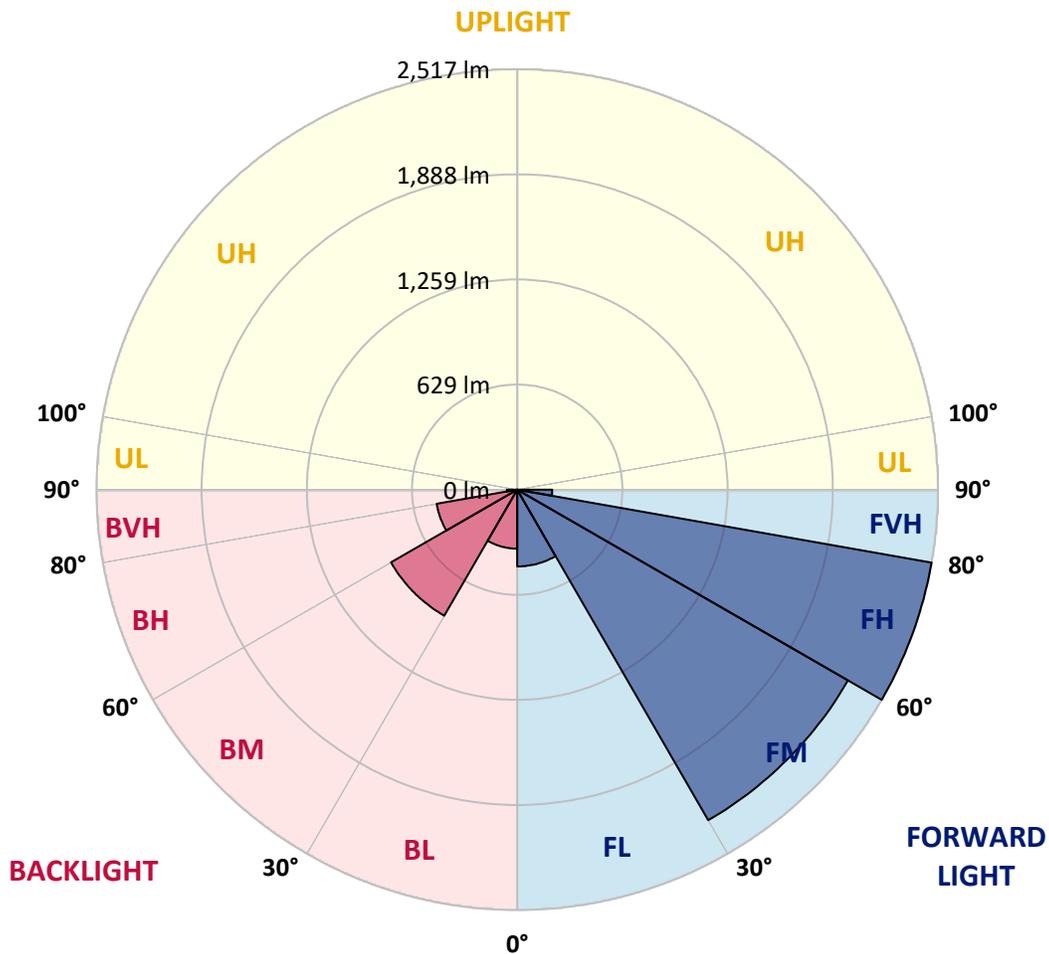



REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4
2.5°	860.2	857.9	857.1	854.1	851.1	845.7	840.4	836.6	832.7	828.2	821.2
5°	920.2	913.4	904.1	890.9	877.6	865.2	852.8	842.3	831.9	822.5	813.9
7.5°	1001.6	971.1	945.4	924.3	903.1	883.1	863.0	847.7	832.3	817.7	803.3
10°	1060.7	1035.5	1005.6	969.6	933.8	905.7	877.9	860.7	843.6	830.2	807.6
12.5°	1132.4	1093.6	1051.4	1008.0	964.5	929.2	894.1	869.2	844.4	825.8	816.3
15°	1203.2	1156.0	1102.8	1045.6	988.4	943.6	898.9	870.4	842.0	822.5	817.1
17.5°	1281.4	1212.3	1144.1	1076.4	1008.6	950.4	892.2	858.8	825.4	806.3	815.2
20°	1336.9	1267.2	1193.3	1111.1	1028.9	955.6	882.2	841.9	801.5	782.9	786.8
22.5°	1377.8	1305.0	1225.5	1130.3	1035.2	948.3	861.4	815.7	770.1	751.7	767.6
25°	1433.3	1346.1	1253.2	1142.5	1031.8	932.8	833.9	787.3	740.7	725.3	741.5
27.5°	1468.9	1390.4	1300.8	1176.2	1051.5	936.7	821.7	770.1	718.5	701.9	717.5
30°	1520.8	1440.0	1344.6	1204.9	1065.1	938.9	812.6	758.3	704.0	686.1	691.2
32.5°	1573.0	1485.9	1382.0	1223.5	1065.0	928.1	791.2	740.3	689.3	673.1	678.1
35°	1615.9	1530.4	1420.7	1240.6	1060.4	912.8	765.0	718.4	671.6	659.3	657.8
37.5°	1691.3	1589.0	1458.8	1253.9	1048.9	890.0	731.0	686.5	641.9	633.0	629.6
40°	1796.2	1683.7	1527.0	1284.0	1041.0	868.0	695.0	652.0	609.0	605.9	603.4
42.5°	1942.4	1787.4	1590.2	1312.7	1035.2	849.7	664.2	623.0	581.7	575.9	569.4
45°	2193.1	1955.0	1677.9	1352.0	1026.1	835.0	643.9	602.5	560.9	543.9	543.7
47.5°	2612.6	2235.7	1819.1	1414.6	1010.2	819.8	629.4	591.8	554.2	527.3	517.3
50°	3167.5	2637.3	2045.1	1525.4	1005.8	814.2	622.7	588.2	553.9	514.3	495.4
52.5°	3677.8	2987.7	2227.9	1610.3	992.6	800.2	607.7	581.1	554.4	515.2	489.5
55°	4120.4	3223.0	2302.6	1632.5	962.3	771.3	580.4	570.6	560.7	537.4	492.5
57.5°	4439.6	3257.2	2164.9	1528.5	892.2	728.1	563.9	557.8	551.6	552.0	501.2
60°	4384.9	3054.6	1862.3	1302.3	742.1	647.2	552.3	533.7	515.2	533.0	503.0
62.5°	4028.5	2719.5	1564.3	1082.2	600.2	555.2	510.1	495.3	480.5	501.4	490.7
65°	3585.4	2347.4	1284.0	880.5	476.9	468.0	459.1	455.9	452.6	458.1	464.1
67.5°	3075.9	1955.9	1024.0	692.7	361.4	369.4	377.5	393.2	408.9	411.1	425.2
70°	2637.7	1602.7	787.5	538.2	288.8	299.7	310.6	333.9	357.2	368.5	381.3
72.5°	2114.9	1236.7	576.7	406.0	235.3	244.8	254.3	280.7	307.0	331.7	345.4
75°	1556.0	890.0	406.6	300.2	193.7	200.8	207.8	232.1	256.6	288.0	302.2
77.5°	1078.9	613.0	283.7	221.1	158.6	162.0	165.4	187.6	209.8	246.6	261.5
80°	594.9	352.8	183.1	152.7	122.3	124.7	127.0	145.5	164.0	196.8	214.1
82.5°	294.4	188.2	115.2	102.8	90.3	91.6	93.0	107.0	121.1	144.6	163.1
85°	115.8	85.0	64.6	61.2	57.9	58.6	59.3	68.1	76.9	91.5	110.3
87.5°	41.7	32.4	26.9	25.8	24.5	23.7	22.8	27.4	31.8	39.7	62.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4
2.5°	817.6	814.0	810.6	807.2	803.9	800.7	798.2	795.8	791.0	786.3	783.7
5°	804.2	794.4	786.0	777.6	772.3	767.1	761.4	755.7	751.3	747.0	743.6
7.5°	791.9	780.4	771.1	761.8	754.2	746.6	741.2	735.9	734.8	733.9	731.6
10°	795.5	783.4	774.4	765.3	758.3	751.5	747.7	744.0	742.8	741.5	741.5
12.5°	810.7	805.1	798.6	792.0	785.0	778.2	778.5	778.8	772.9	767.1	765.5
15°	819.0	820.9	823.0	825.2	823.4	821.5	814.8	808.0	801.0	794.0	791.7
17.5°	821.7	828.0	837.7	847.4	851.5	855.5	847.6	839.6	828.3	817.1	811.8
20°	801.9	816.9	835.2	853.6	860.3	867.1	859.4	851.7	839.2	826.6	818.3
22.5°	786.1	804.5	823.7	842.8	848.8	854.7	850.4	846.0	832.5	818.9	809.9
25°	759.7	777.8	796.2	814.7	823.0	831.5	830.4	829.4	815.3	801.2	791.4
27.5°	732.7	748.0	764.2	780.4	789.8	799.3	800.6	801.9	791.4	780.8	771.6
30°	701.7	712.1	726.4	740.5	750.2	759.9	763.3	766.7	759.9	753.3	747.0
32.5°	682.5	686.9	697.0	707.1	716.4	725.6	730.7	735.9	734.7	733.7	731.3
35°	657.6	657.3	661.8	666.5	674.8	683.2	693.2	703.1	704.4	705.7	706.6
37.5°	626.8	623.9	626.9	629.8	637.1	644.3	654.6	665.0	672.4	679.7	683.1
40°	599.4	595.3	595.7	596.0	602.6	609.1	618.8	628.6	642.2	655.9	663.5
42.5°	567.5	565.5	564.5	563.3	568.9	574.4	589.2	603.8	619.2	634.4	641.1
45°	539.3	535.0	536.5	538.0	545.0	552.0	564.7	577.5	595.0	612.5	620.9
47.5°	515.0	512.7	515.2	517.6	524.7	531.8	547.4	562.9	580.0	597.1	606.0
50°	494.0	492.6	499.6	506.4	514.5	522.6	536.1	549.6	567.8	586.0	598.2
52.5°	485.9	482.3	492.5	502.6	508.8	515.0	527.6	540.3	560.2	580.1	591.9
55°	480.9	469.4	481.8	494.1	501.5	509.1	523.1	537.0	554.8	572.5	583.8
57.5°	479.2	457.2	469.4	481.5	494.5	507.5	521.6	535.8	554.0	572.0	581.7
60°	477.4	451.8	458.9	465.9	484.5	503.0	516.4	529.7	546.6	563.3	570.1
62.5°	469.0	447.3	446.5	445.7	465.6	485.3	500.7	516.0	531.3	546.6	551.3
65°	450.0	435.8	429.5	423.2	440.7	458.3	474.6	490.9	503.5	516.1	522.0
67.5°	417.5	409.7	404.8	400.0	417.1	434.2	446.7	459.3	471.8	484.4	489.2
70°	382.3	383.3	379.7	376.0	388.6	401.1	417.2	433.3	440.3	447.3	450.0
72.5°	345.4	345.5	343.8	342.0	354.4	366.8	377.4	388.0	394.5	401.1	404.2
75°	303.6	305.0	303.8	302.8	313.4	324.0	333.7	343.4	350.6	357.6	359.5
77.5°	264.8	268.1	266.8	265.5	272.0	278.5	282.6	286.7	294.8	302.9	304.5
80°	218.9	223.7	223.4	222.9	226.0	229.1	230.1	231.3	237.2	243.2	244.8
82.5°	170.7	178.2	183.7	189.1	191.2	193.2	184.3	175.4	180.1	184.8	188.6
85°	124.3	138.1	148.2	158.4	152.4	146.4	123.4	100.4	109.5	118.7	124.7
87.5°	76.7	90.9	96.1	101.2	93.2	85.2	68.4	51.4	58.8	66.3	72.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4
2.5°	781.0	780.1	779.2	781.2	783.1	785.7	783.1	781.2	779.2	780.1	781.0
5°	740.2	738.7	737.3	737.7	738.1	737.9	738.1	737.7	737.3	738.7	740.2
7.5°	729.4	729.2	729.0	729.6	730.2	727.4	730.2	729.6	729.0	729.2	729.4
10°	741.3	743.6	745.8	747.7	749.6	748.4	749.6	747.7	745.8	743.6	741.3
12.5°	764.0	766.9	769.7	770.7	771.8	769.5	771.8	770.7	769.7	766.9	764.0
15°	789.3	789.1	788.9	788.0	786.9	785.7	786.9	788.0	788.9	789.1	789.3
17.5°	806.6	804.2	801.9	800.8	799.6	801.1	799.6	800.8	801.9	804.2	806.6
20°	810.0	808.8	807.6	807.5	807.4	806.8	807.4	807.5	807.6	808.8	810.0
22.5°	800.9	797.1	793.4	795.0	796.6	801.9	796.6	795.0	793.4	797.1	800.9
25°	781.5	779.6	777.8	777.3	776.8	774.4	776.8	777.3	777.8	779.6	781.5
27.5°	762.4	760.7	759.1	761.2	763.2	764.6	763.2	761.2	759.1	760.7	762.4
30°	740.7	741.1	741.3	744.5	747.6	753.3	747.6	744.5	741.3	741.1	740.7
32.5°	728.8	725.6	722.4	723.4	724.5	729.0	724.5	723.4	722.4	725.6	728.8
35°	707.5	707.5	707.5	710.2	712.8	718.5	712.8	710.2	707.5	707.5	707.5
37.5°	686.5	689.1	691.7	692.9	694.0	694.2	694.0	692.9	691.7	689.1	686.5
40°	671.1	671.4	671.6	670.0	668.4	669.1	668.4	670.0	671.6	671.4	671.1
42.5°	647.8	650.7	653.7	654.4	655.1	656.9	655.1	654.4	653.7	650.7	647.8
45°	629.2	630.7	632.2	631.8	631.4	629.4	631.4	631.8	632.2	630.7	629.2
47.5°	614.8	616.1	617.4	618.4	619.5	621.3	619.5	618.4	617.4	616.1	614.8
50°	610.3	609.9	609.5	606.3	603.0	601.8	603.0	606.3	609.5	609.9	610.3
52.5°	603.6	604.7	605.7	603.8	602.0	602.6	602.0	603.8	605.7	604.7	603.6
55°	595.2	596.3	597.6	594.0	590.5	588.1	590.5	594.0	597.6	596.3	595.2
57.5°	591.5	589.3	587.1	584.3	581.6	582.4	581.6	584.3	587.1	589.3	591.5
60°	576.7	574.1	571.4	565.5	559.5	554.8	559.5	565.5	571.4	574.1	576.7
62.5°	556.1	553.5	551.0	544.2	537.4	528.9	537.4	544.2	551.0	553.5	556.1
65°	527.7	523.6	519.4	512.6	505.8	501.4	505.8	512.6	519.4	523.6	527.7
67.5°	493.9	489.3	484.8	475.9	467.0	460.1	467.0	475.9	484.8	489.3	493.9
70°	452.6	448.2	443.9	438.2	432.5	427.7	432.5	438.2	443.9	448.2	452.6
72.5°	407.3	402.4	397.5	389.9	382.3	377.5	382.3	389.9	397.5	402.4	407.3
75°	361.3	355.2	349.1	341.2	333.3	326.4	333.3	341.2	349.1	355.2	361.3
77.5°	306.0	301.4	296.9	289.5	282.0	275.4	282.0	289.5	296.9	301.4	306.0
80°	246.4	244.2	242.0	235.9	229.9	221.1	229.9	235.9	242.0	244.2	246.4
82.5°	192.1	191.2	190.2	185.1	180.0	172.5	180.0	185.1	190.2	191.2	192.1
85°	130.8	131.9	132.8	129.3	125.7	119.9	125.7	129.3	132.8	131.9	130.8
87.5°	78.4	74.4	70.5	62.4	54.3	45.4	54.3	62.4	70.5	74.4	78.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4
2.5°	783.7	786.3	791.0	795.8	798.2	800.7	803.9	807.2	810.6	814.0	817.6
5°	743.6	747.0	751.3	755.7	761.4	767.1	772.3	777.6	786.0	794.4	804.2
7.5°	731.6	733.9	734.8	735.9	741.2	746.6	754.2	761.8	771.1	780.4	791.9
10°	741.5	741.5	742.8	744.0	747.7	751.5	758.3	765.3	774.4	783.4	795.5
12.5°	765.5	767.1	772.9	778.8	778.5	778.2	785.0	792.0	798.6	805.1	810.7
15°	791.7	794.0	801.0	808.0	814.8	821.5	823.4	825.2	823.0	820.9	819.0
17.5°	811.8	817.1	828.3	839.6	847.6	855.5	851.5	847.4	837.7	828.0	821.7
20°	818.3	826.6	839.2	851.7	859.4	867.1	860.3	853.6	835.2	816.9	801.9
22.5°	809.9	818.9	832.5	846.0	850.4	854.7	848.8	842.8	823.7	804.5	786.1
25°	791.4	801.2	815.3	829.4	830.4	831.5	823.0	814.7	796.2	777.8	759.7
27.5°	771.6	780.8	791.4	801.9	800.6	799.3	789.8	780.4	764.2	748.0	732.7
30°	747.0	753.3	759.9	766.7	763.3	759.9	750.2	740.5	726.4	712.1	701.7
32.5°	731.3	733.7	734.7	735.9	730.7	725.6	716.4	707.1	697.0	686.9	682.5
35°	706.6	705.7	704.4	703.1	693.2	683.2	674.8	666.5	661.8	657.3	657.6
37.5°	683.1	679.7	672.4	665.0	654.6	644.3	637.1	629.8	626.9	623.9	626.8
40°	663.5	655.9	642.2	628.6	618.8	609.1	602.6	596.0	595.7	595.3	599.4
42.5°	641.1	634.4	619.2	603.8	589.2	574.4	568.9	563.3	564.5	565.5	567.5
45°	620.9	612.5	595.0	577.5	564.7	552.0	545.0	538.0	536.5	535.0	539.3
47.5°	606.0	597.1	580.0	562.9	547.4	531.8	524.7	517.6	515.2	512.7	515.0
50°	598.2	586.0	567.8	549.6	536.1	522.6	514.5	506.4	499.6	492.6	494.0
52.5°	591.9	580.1	560.2	540.3	527.6	515.0	508.8	502.6	492.5	482.3	485.9
55°	583.8	572.5	554.8	537.0	523.1	509.1	501.5	494.1	481.8	469.4	480.9
57.5°	581.7	572.0	554.0	535.8	521.6	507.5	494.5	481.5	469.4	457.2	479.2
60°	570.1	563.3	546.6	529.7	516.4	503.0	484.5	465.9	458.9	451.8	477.4
62.5°	551.3	546.6	531.3	516.0	500.7	485.3	465.6	445.7	446.5	447.3	469.0
65°	522.0	516.1	503.5	490.9	474.6	458.3	440.7	423.2	429.5	435.8	450.0
67.5°	489.2	484.4	471.8	459.3	446.7	434.2	417.1	400.0	404.8	409.7	417.5
70°	450.0	447.3	440.3	433.3	417.2	401.1	388.6	376.0	379.7	383.3	382.3
72.5°	404.2	401.1	394.5	388.0	377.4	366.8	354.4	342.0	343.8	345.5	345.4
75°	359.5	357.6	350.6	343.4	333.7	324.0	313.4	302.8	303.8	305.0	303.6
77.5°	304.5	302.9	294.8	286.7	282.6	278.5	272.0	265.5	266.8	268.1	264.8
80°	244.8	243.2	237.2	231.3	230.1	229.1	226.0	222.9	223.4	223.7	218.9
82.5°	188.6	184.8	180.1	175.4	184.3	193.2	191.2	189.1	183.7	178.2	170.7
85°	124.7	118.7	109.5	100.4	123.4	146.4	152.4	158.4	148.2	138.1	124.3
87.5°	72.3	66.3	58.8	51.4	68.4	85.2	93.2	101.2	96.1	90.9	76.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4
2.5°	821.2	828.2	832.7	836.6	840.4	845.7	851.1	854.1	857.1	857.9	860.2
5°	813.9	822.5	831.9	842.3	852.8	865.2	877.6	890.9	904.1	913.4	920.2
7.5°	803.3	817.7	832.3	847.7	863.0	883.1	903.1	924.3	945.4	971.1	1001.6
10°	807.6	830.2	843.6	860.7	877.9	905.7	933.8	969.6	1005.6	1035.5	1060.7
12.5°	816.3	825.8	844.4	869.2	894.1	929.2	964.5	1008.0	1051.4	1093.6	1132.4
15°	817.1	822.5	842.0	870.4	898.9	943.6	988.4	1045.6	1102.8	1156.0	1203.2
17.5°	815.2	806.3	825.4	858.8	892.2	950.4	1008.6	1076.4	1144.1	1212.3	1281.4
20°	786.8	782.9	801.5	841.9	882.2	955.6	1028.9	1111.1	1193.3	1267.2	1336.9
22.5°	767.6	751.7	770.1	815.7	861.4	948.3	1035.2	1130.3	1225.5	1305.0	1377.8
25°	741.5	725.3	740.7	787.3	833.9	932.8	1031.8	1142.5	1253.2	1346.1	1433.3
27.5°	717.5	701.9	718.5	770.1	821.7	936.7	1051.5	1176.2	1300.8	1390.4	1468.9
30°	691.2	686.1	704.0	758.3	812.6	938.9	1065.1	1204.9	1344.6	1440.0	1520.8
32.5°	678.1	673.1	689.3	740.3	791.2	928.1	1065.0	1223.5	1382.0	1485.9	1573.0
35°	657.8	659.3	671.6	718.4	765.0	912.8	1060.4	1240.6	1420.7	1530.4	1615.9
37.5°	629.6	633.0	641.9	686.5	731.0	890.0	1048.9	1253.9	1458.8	1589.0	1691.3
40°	603.4	605.9	609.0	652.0	695.0	868.0	1041.0	1284.0	1527.0	1683.7	1796.2
42.5°	569.4	575.9	581.7	623.0	664.2	849.7	1035.2	1312.7	1590.2	1787.4	1942.4
45°	543.7	543.9	560.9	602.5	643.9	835.0	1026.1	1352.0	1677.9	1955.0	2193.1
47.5°	517.3	527.3	554.2	591.8	629.4	819.8	1010.2	1414.6	1819.1	2235.7	2612.6
50°	495.4	514.3	553.9	588.2	622.7	814.2	1005.8	1525.4	2045.1	2637.3	3167.5
52.5°	489.5	515.2	554.4	581.1	607.7	800.2	992.6	1610.3	2227.9	2987.7	3677.8
55°	492.5	537.4	560.7	570.6	580.4	771.3	962.3	1632.5	2302.6	3223.0	4120.4
57.5°	501.2	552.0	551.6	557.8	563.9	728.1	892.2	1528.5	2164.9	3257.2	4439.6
60°	503.0	533.0	515.2	533.7	552.3	647.2	742.1	1302.3	1862.3	3054.6	4384.9
62.5°	490.7	501.4	480.5	495.3	510.1	555.2	600.2	1082.2	1564.3	2719.5	4028.5
65°	464.1	458.1	452.6	455.9	459.1	468.0	476.9	880.5	1284.0	2347.4	3585.4
67.5°	425.2	411.1	408.9	393.2	377.5	369.4	361.4	692.7	1024.0	1955.9	3075.9
70°	381.3	368.5	357.2	333.9	310.6	299.7	288.8	538.2	787.5	1602.7	2637.7
72.5°	345.4	331.7	307.0	280.7	254.3	244.8	235.3	406.0	576.7	1236.7	2114.9
75°	302.2	288.0	256.6	232.1	207.8	200.8	193.7	300.2	406.6	890.0	1556.0
77.5°	261.5	246.6	209.8	187.6	165.4	162.0	158.6	221.1	283.7	613.0	1078.9
80°	214.1	196.8	164.0	145.5	127.0	124.7	122.3	152.7	183.1	352.8	594.9
82.5°	163.1	144.6	121.1	107.0	93.0	91.6	90.3	102.8	115.2	188.2	294.4
85°	110.3	91.5	76.9	68.1	59.3	58.6	57.9	61.2	64.6	85.0	115.8
87.5°	62.5	39.7	31.8	27.4	22.8	23.7	24.5	25.8	26.9	32.4	41.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4	825.4
2.5°	863.9	867.5	869.0	870.6	872.0	873.6	874.7	875.9	873.2	875.9	874.7
5°	931.5	942.8	952.6	962.4	969.9	977.3	980.9	984.6	990.6	984.6	980.9
7.5°	1017.0	1032.6	1053.9	1075.3	1089.8	1104.2	1110.5	1116.8	1118.6	1116.8	1110.5
10°	1100.4	1140.1	1163.6	1187.3	1204.5	1221.9	1236.7	1251.6	1268.4	1251.6	1236.7
12.5°	1177.6	1222.7	1256.7	1290.7	1312.6	1334.5	1349.1	1363.9	1368.9	1363.9	1349.1
15°	1252.6	1301.8	1333.7	1365.6	1382.7	1399.7	1407.0	1414.2	1423.2	1414.2	1407.0
17.5°	1318.3	1355.3	1376.3	1397.4	1398.1	1398.9	1389.7	1380.5	1378.6	1380.5	1389.7
20°	1367.4	1398.0	1398.4	1398.9	1380.6	1362.4	1346.5	1330.7	1323.5	1330.7	1346.5
22.5°	1398.8	1419.8	1398.1	1376.6	1336.1	1295.6	1272.6	1249.6	1243.3	1249.6	1272.6
25°	1436.5	1439.8	1395.8	1351.9	1295.3	1238.9	1209.4	1179.8	1172.9	1179.8	1209.4
27.5°	1458.7	1448.4	1381.8	1315.0	1248.7	1182.4	1148.8	1115.2	1105.6	1115.2	1148.8
30°	1483.7	1446.6	1360.7	1274.8	1208.0	1141.3	1113.2	1085.1	1076.5	1085.1	1113.2
32.5°	1511.3	1449.5	1357.4	1265.2	1218.7	1172.2	1164.6	1156.9	1151.0	1156.9	1164.6
35°	1546.6	1477.3	1407.8	1338.5	1345.6	1352.7	1377.6	1402.7	1402.1	1402.7	1377.6
37.5°	1620.3	1549.4	1537.8	1526.4	1615.9	1705.4	1777.3	1849.0	1886.5	1849.0	1777.3
40°	1746.3	1696.5	1738.1	1779.6	1904.0	2028.4	2113.4	2198.5	2260.7	2198.5	2113.4
42.5°	1914.0	1885.7	1937.6	1989.5	2126.1	2262.5	2378.5	2494.3	2581.4	2494.3	2378.5
45°	2163.8	2134.5	2159.3	2183.9	2354.8	2525.7	2707.3	2888.9	3042.3	2888.9	2707.3
47.5°	2544.6	2476.5	2455.8	2435.0	2665.3	2895.6	3160.9	3426.4	3584.2	3426.4	3160.9
50°	3061.1	2954.8	2857.8	2760.9	3085.7	3410.7	3797.2	4183.8	4346.4	4183.8	3797.2
52.5°	3580.2	3482.6	3312.1	3141.6	3526.1	3910.6	4412.6	4914.5	5070.5	4914.5	4412.6
55°	4161.2	4202.1	3971.4	3740.7	4167.3	4593.9	5236.9	5879.9	6155.1	5879.9	5236.9
57.5°	4802.6	5165.7	4919.2	4672.7	5070.9	5469.1	6233.4	6997.8	7458.4	6997.8	6233.4
60°	5112.6	5840.2	5730.8	5621.3	5961.5	6301.7	7131.0	7960.4	8498.4	7960.4	7131.0
62.5°	4820.4	5612.4	5643.3	5674.2	6128.5	6582.8	7332.5	8082.3	8558.4	8082.3	7332.5
65°	4330.9	5076.2	5122.0	5167.7	5693.0	6218.3	6953.7	7689.1	8073.2	7689.1	6953.7
67.5°	3851.1	4626.3	4653.9	4681.6	5161.7	5641.8	6303.7	6965.6	7186.2	6965.6	6303.7
70°	3376.1	4114.6	4175.1	4235.6	4654.9	5073.9	5564.1	6054.2	6180.2	6054.2	5564.1
72.5°	2857.6	3600.2	3692.7	3785.3	4092.4	4399.5	4742.2	5084.8	5073.0	5084.8	4742.2
75°	2251.9	2948.0	3075.9	3203.9	3392.2	3580.6	3761.5	3942.6	3891.2	3942.6	3761.5
77.5°	1641.8	2204.6	2340.1	2475.7	2608.6	2741.4	2869.0	2996.6	2916.0	2996.6	2869.0
80°	996.0	1397.1	1549.6	1702.2	1841.0	1979.8	2045.6	2111.4	1975.6	2111.4	2045.6
82.5°	518.4	742.4	894.1	1045.9	1186.6	1327.2	1368.4	1409.5	1279.8	1409.5	1368.4
85°	228.3	340.6	453.9	567.2	678.0	788.8	793.0	797.3	703.9	797.3	793.0
87.5°	87.6	133.6	192.0	250.3	309.8	369.4	367.3	365.1	301.3	365.1	367.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1208536

CATALOG NUMBER: UPW-SA1-070-730-U-SLR

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	825.4	825.4	825.4	825.4	825.4	825.4	825.4
2.5°	873.6	872.0	870.6	869.0	867.5	863.9	860.2
5°	977.3	969.9	962.4	952.6	942.8	931.5	920.2
7.5°	1104.2	1089.8	1075.3	1053.9	1032.6	1017.0	1001.6
10°	1221.9	1204.5	1187.3	1163.6	1140.1	1100.4	1060.7
12.5°	1334.5	1312.6	1290.7	1256.7	1222.7	1177.6	1132.4
15°	1399.7	1382.7	1365.6	1333.7	1301.8	1252.6	1203.2
17.5°	1398.9	1398.1	1397.4	1376.3	1355.3	1318.3	1281.4
20°	1362.4	1380.6	1398.9	1398.4	1398.0	1367.4	1336.9
22.5°	1295.6	1336.1	1376.6	1398.1	1419.8	1398.8	1377.8
25°	1238.9	1295.3	1351.9	1395.8	1439.8	1436.5	1433.3
27.5°	1182.4	1248.7	1315.0	1381.8	1448.4	1458.7	1468.9
30°	1141.3	1208.0	1274.8	1360.7	1446.6	1483.7	1520.8
32.5°	1172.2	1218.7	1265.2	1357.4	1449.5	1511.3	1573.0
35°	1352.7	1345.6	1338.5	1407.8	1477.3	1546.6	1615.9
37.5°	1705.4	1615.9	1526.4	1537.8	1549.4	1620.3	1691.3
40°	2028.4	1904.0	1779.6	1738.1	1696.5	1746.3	1796.2
42.5°	2262.5	2126.1	1989.5	1937.6	1885.7	1914.0	1942.4
45°	2525.7	2354.8	2183.9	2159.3	2134.5	2163.8	2193.1
47.5°	2895.6	2665.3	2435.0	2455.8	2476.5	2544.6	2612.6
50°	3410.7	3085.7	2760.9	2857.8	2954.8	3061.1	3167.5
52.5°	3910.6	3526.1	3141.6	3312.1	3482.6	3580.2	3677.8
55°	4593.9	4167.3	3740.7	3971.4	4202.1	4161.2	4120.4
57.5°	5469.1	5070.9	4672.7	4919.2	5165.7	4802.6	4439.6
60°	6301.7	5961.5	5621.3	5730.8	5840.2	5112.6	4384.9
62.5°	6582.8	6128.5	5674.2	5643.3	5612.4	4820.4	4028.5
65°	6218.3	5693.0	5167.7	5122.0	5076.2	4330.9	3585.4
67.5°	5641.8	5161.7	4681.6	4653.9	4626.3	3851.1	3075.9
70°	5073.9	4654.9	4235.6	4175.1	4114.6	3376.1	2637.7
72.5°	4399.5	4092.4	3785.3	3692.7	3600.2	2857.6	2114.9
75°	3580.6	3392.2	3203.9	3075.9	2948.0	2251.9	1556.0
77.5°	2741.4	2608.6	2475.7	2340.1	2204.6	1641.8	1078.9
80°	1979.8	1841.0	1702.2	1549.6	1397.1	996.0	594.9
82.5°	1327.2	1186.6	1045.9	894.1	742.4	518.4	294.4
85°	788.8	678.0	567.2	453.9	340.6	228.3	115.8
87.5°	369.4	309.8	250.3	192.0	133.6	87.6	41.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)