

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: METALUX

Report Number: P982612

Luminaire Tested: 14CZ-LD5-29-UNV-L835-RDP-CD1-U

Issue Date: 04/23/2025

**Test Information**

Test Method: LM-79-2019  
Report Number: P982612  
Test Lab: INNOVATION CENTER(P3)  
Issue Date: 04/23/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: METALUX  
Catalog Number: 14CZ-LD5-29-UNV-L835-RDP-CD1-U  
Description: METALUX CRUZE 1x4 2900LM PACKAGE 80CRI 3500K TROFFER LENS WITH RDP FILM INSERT  
Light Source: 3500K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1833.8 lumens  
Efficiency: N/A  
Efficacy: 89.5 lumens/watt  
Spacing Criteria (0/90/45): 1.25 / 1.28 / 1.4  
Luminous Opening: Rectangular (W 1' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 20.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT

TEST NUMBER: P982612

CATALOG NUMBER: 14CZ-LD5-29-UNV-L835-RDP-CD1-U

### Luminous Intensity Polar Plot

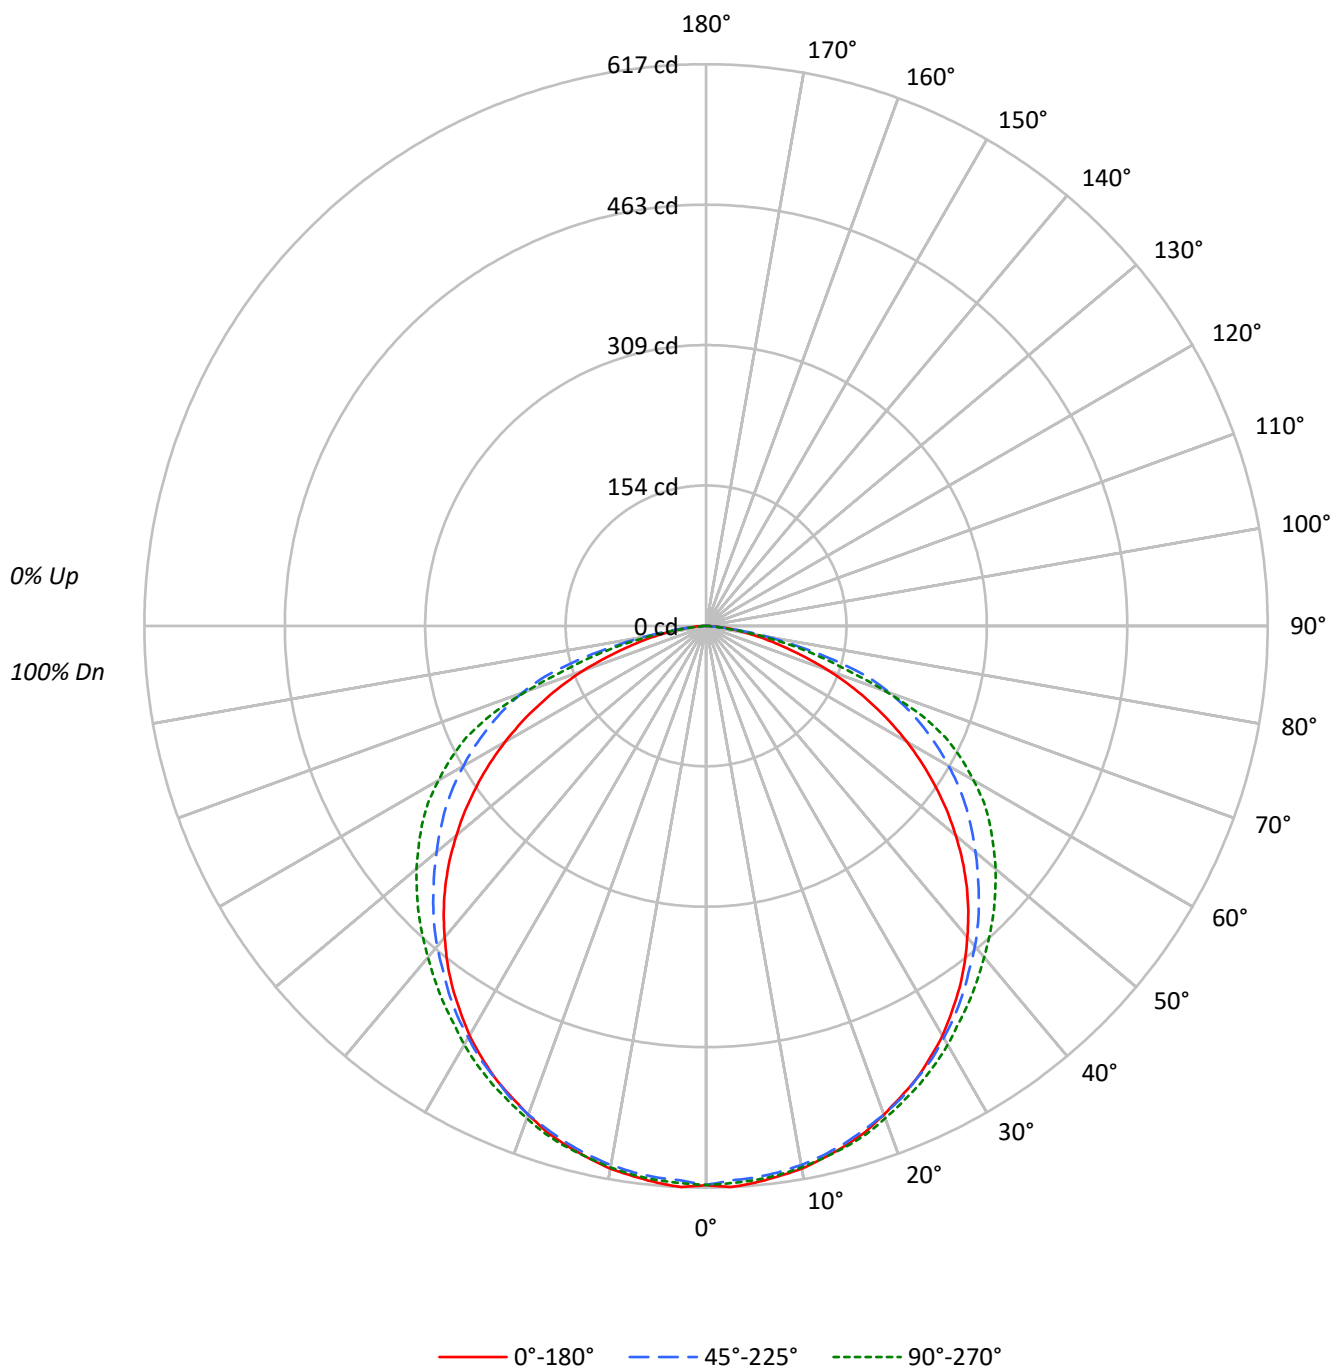

TEST NUMBER: P982612

CATALOG NUMBER: 14CZ-LD5-29-UNV-L835-RDP-CD1-U

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  |  | 106 | 106 | 106 |  | 102 |
| 1   | 109 | 104 | 100 | 96  | 106 | 102 | 98  | 94  | 97  | 94  | 91  |  |  | 93  | 91  | 88  |  | 90  |
| 2   | 99  | 90  | 83  | 77  | 96  | 88  | 82  | 76  | 85  | 79  | 75  |  |  | 81  | 77  | 73  |  | 78  |
| 3   | 90  | 79  | 71  | 64  | 87  | 77  | 70  | 63  | 74  | 68  | 62  |  |  | 71  | 66  | 61  |  | 69  |
| 4   | 82  | 70  | 61  | 54  | 80  | 68  | 60  | 53  | 66  | 58  | 53  |  |  | 63  | 57  | 52  |  | 61  |
| 5   | 75  | 62  | 53  | 46  | 73  | 61  | 52  | 46  | 59  | 51  | 45  |  |  | 57  | 50  | 45  |  | 55  |
| 6   | 69  | 56  | 47  | 40  | 67  | 55  | 46  | 40  | 53  | 45  | 40  |  |  | 51  | 44  | 39  |  | 50  |
| 7   | 64  | 50  | 42  | 35  | 62  | 50  | 41  | 35  | 48  | 40  | 35  |  |  | 47  | 40  | 35  |  | 45  |
| 8   | 60  | 46  | 37  | 31  | 58  | 45  | 37  | 31  | 44  | 36  | 31  |  |  | 43  | 36  | 31  |  | 41  |
| 9   | 56  | 42  | 34  | 28  | 54  | 42  | 34  | 28  | 40  | 33  | 28  |  |  | 39  | 33  | 28  |  | 38  |
| 10  | 52  | 39  | 31  | 25  | 51  | 38  | 31  | 25  | 37  | 30  | 25  |  |  | 36  | 30  | 25  |  | 35  |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°   | 45°  | 90°  |
|-----|------|------|------|
| 0°  | 1653 | 1653 | 1653 |
| 5°  | 1659 | 1643 | 1651 |
| 10° | 1655 | 1643 | 1651 |
| 15° | 1647 | 1639 | 1651 |
| 20° | 1636 | 1636 | 1648 |
| 25° | 1628 | 1628 | 1649 |
| 30° | 1615 | 1624 | 1651 |
| 35° | 1595 | 1618 | 1656 |
| 40° | 1569 | 1614 | 1670 |
| 45° | 1542 | 1613 | 1700 |
| 50° | 1499 | 1618 | 1738 |
| 55° | 1444 | 1639 | 1787 |
| 60° | 1371 | 1657 | 1827 |
| 65° | 1267 | 1677 | 1851 |
| 70° | 1126 | 1689 | 1655 |
| 75° | 908  | 1518 | 1325 |
| 80° | 710  | 1065 | 865  |
| 85° | 485  | 312  | 222  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°

Vertical Angle: 65°

Luminance: 1851 cd/sqm

TEST NUMBER: P982612

CATALOG NUMBER: 14CZ-LD5-29-UNV-L835-RDP-CD1-U

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 58.1   | 3.2       |
| 10°-20°   | 166.8  | 9.1       |
| 20°-30°   | 254.0  | 13.8      |
| 30°-40°   | 309.3  | 16.9      |
| 40°-50°   | 328.2  | 17.9      |
| 50°-60°   | 309.7  | 16.9      |
| 60°-70°   | 250.1  | 13.6      |
| 70°-80°   | 135.7  | 7.4       |
| 80°-90°   | 22.0   | 1.2       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 478.9  | 26.1      |
| 0°-40°    | 788.2  | 43.0      |
| 0°-60°    | 1426.1 | 77.8      |
| 0°-90°    | 1833.8 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1833.8 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | 22.5° | 45° | 67.5° | 90° | Flux |
|-----|-----|-------|-----|-------|-----|------|
| 0°  | 614 | 614   | 614 | 614   | 614 |      |
| 5°  | 614 | 613   | 608 | 613   | 611 | 58   |
| 15° | 591 | 590   | 588 | 593   | 593 | 167  |
| 25° | 548 | 547   | 548 | 554   | 555 | 252  |
| 35° | 485 | 488   | 492 | 502   | 504 | 303  |
| 45° | 405 | 411   | 424 | 440   | 447 | 312  |
| 55° | 308 | 321   | 349 | 372   | 381 | 275  |
| 65° | 199 | 223   | 263 | 285   | 291 | 197  |
| 75° | 87  | 127   | 146 | 132   | 127 | 95   |
| 85° | 16  | 17    | 10  | 8     | 7   | 20   |
| 90° | 0   | 0     | 0   | 0     | 0   |      |

TEST NUMBER: P982612

CATALOG NUMBER: 14CZ-LD5-29-UNV-L835-RDP-CD1-U

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    | 22.5° | 45°   | 67.5° | 90°   |
|-------|-------|-------|-------|-------|-------|
| 0°    | 614.2 | 614.2 | 614.2 | 614.2 | 614.2 |
| 2.5°  | 617.1 | 614.2 | 609.9 | 614.2 | 612.8 |
| 5°    | 614.2 | 612.8 | 608.4 | 612.8 | 611.3 |
| 7.5°  | 609.9 | 609.9 | 605.6 | 608.4 | 608.4 |
| 10°   | 605.6 | 604.1 | 601.4 | 605.6 | 604.1 |
| 12.5° | 598.5 | 596.9 | 595.6 | 599.8 | 598.5 |
| 15°   | 591.3 | 589.8 | 588.4 | 592.7 | 592.7 |
| 17.5° | 582.7 | 581.2 | 579.8 | 585.5 | 585.5 |
| 20°   | 571.2 | 571.2 | 571.2 | 577.0 | 575.6 |
| 22.5° | 559.7 | 559.7 | 561.2 | 566.9 | 565.5 |
| 25°   | 548.3 | 546.9 | 548.3 | 554.1 | 555.4 |
| 27.5° | 534.1 | 535.4 | 536.8 | 542.6 | 544.0 |
| 30°   | 519.7 | 521.1 | 522.5 | 529.7 | 531.2 |
| 32.5° | 502.5 | 505.4 | 508.3 | 516.8 | 516.8 |
| 35°   | 485.4 | 488.1 | 492.4 | 502.5 | 504.0 |
| 37.5° | 466.8 | 469.5 | 475.3 | 486.8 | 489.7 |
| 40°   | 446.6 | 450.9 | 459.6 | 471.0 | 475.3 |
| 42.5° | 426.6 | 432.3 | 442.4 | 455.3 | 461.0 |
| 45°   | 405.1 | 410.9 | 423.8 | 439.5 | 446.6 |
| 47.5° | 382.2 | 389.4 | 405.1 | 425.1 | 430.9 |
| 50°   | 358.0 | 367.9 | 386.5 | 408.0 | 415.2 |
| 52.5° | 333.6 | 345.0 | 367.9 | 390.8 | 398.0 |
| 55°   | 307.8 | 320.7 | 349.3 | 372.2 | 380.9 |
| 57.5° | 282.0 | 296.3 | 329.3 | 353.6 | 362.2 |
| 60°   | 254.8 | 272.1 | 307.8 | 332.2 | 339.4 |
| 62.5° | 227.7 | 247.7 | 286.3 | 310.7 | 316.3 |
| 65°   | 199.0 | 223.4 | 263.4 | 284.9 | 290.7 |
| 67.5° | 171.8 | 200.5 | 240.5 | 256.2 | 256.2 |
| 70°   | 143.1 | 174.7 | 214.7 | 219.0 | 210.4 |
| 72.5° | 114.6 | 150.3 | 186.2 | 170.3 | 163.3 |
| 75°   | 87.3  | 127.4 | 146.0 | 131.7 | 127.4 |
| 77.5° | 65.9  | 103.1 | 103.1 | 94.5  | 91.6  |
| 80°   | 45.8  | 78.7  | 68.7  | 60.1  | 55.8  |
| 82.5° | 30.1  | 44.4  | 35.9  | 28.7  | 24.3  |
| 85°   | 15.7  | 17.2  | 10.1  | 8.5   | 7.2   |
| 87.5° | 5.8   | 2.9   | 1.4   | 2.9   | 1.4   |
| 90°   | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP3-2508-516-6

Test Date: 09/03/2025

Luminaire Tested: 24CZ-LD5-65-S-UNV-L935-CD1-U

Data in this report applies to families of products including 24CZ-LD5-65-S-UNV-L935-CD1-U

### Test Information

Test Method: LM-79-2019  
 Report Number: SP3-2508-516-6  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP3 - 3M SPHERE  
 Measurement Geometry:  $4\pi$   
 Issue Date: 09/05/2025  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Metalux  
 Catalog Number: **24CZ-LD5-65-S-UNV-L935-CD1-U**  
 Description: 2X4 CRUZE SB 6500LM 935 SMOOTH LENS

### Spectral Parameters

CCT (K): 3412  
 CIE  $u'$ : 0.2386  
 CIE  $v'$ : 0.5111  
 Duv: -0.0015  
 CIE x: 0.4087  
 CIE y: 0.3890  
 CIE z: 0.2023  
 Peak Wavelength (nm): 630  
 Dominant Wavelength (nm): 581  
 Purity: 39.41044  
 R<sub>f</sub>: 92.6  
 R<sub>g</sub>: 102

CRI (Ra): 96.3  
 R1: 99.2  
 R2: 97.9  
 R3: 94.7  
 R4: 96.6  
 R5: 98.4  
 R6: 96.1  
 R7: 95.6  
 R8: 92.0  
 R9: 78.4  
 R10: 93.0  
 R11: 94.5  
 R12: 81.5  
 R13: 99.0  
 R14: 95.8  
 R15: 96.7



### Test Conditions

Stabilization Time: 20M  
 Operation Time: 1H 20M  
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP3-2508-516-6

| Measurement and Test Equipment |                       |                  |                      |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument                     | Identification Number | Calibration Date | Calibration Due Date |
| Photometer                     | 3M SPHERE IN02505     | 7/1/2025         | 1/1/2026             |
| Power Meter                    | XITRON INXT2011006    | 1/20/2025        | 1/20/2026            |
| AC Power Source                | CHROMA 61604 IN6064A  | 10/22/2024       | 10/22/2025           |
| DC Power Source                | EYSIGHT N5770A IN0534 | 10/22/2024       | 10/22/2025           |
| Sphere Thermometer             | TANDD IN4036E         | 10/22/2024       | 10/22/2025           |
|                                |                       |                  |                      |

REPORT NUMBER: SP3-2508-516-6

**CIE 1931 Chromaticity Diagram**



**CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles**



Point lies inside the ANSI 3500K 4-step quadrangle

REPORT NUMBER: SP3-2508-516-6

### Photopic Flux vs. Wavelength



### Photopic Lumens: NR

| λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) |
|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|
| 360       | 0                           | NR               | 490       | 112                         | NR               | 620       | 281                         | NR               | 750       | 6                           | NR               | 880       | 0                           | NR               |
| 365       | 0                           | NR               | 495       | 134                         | NR               | 625       | 286                         | NR               | 755       | 5                           | NR               | 885       | 0                           | NR               |
| 370       | 0                           | NR               | 500       | 157                         | NR               | 630       | 1000                        | NR               | 760       | 4                           | NR               | 890       | 0                           | NR               |
| 375       | 0                           | NR               | 505       | 178                         | NR               | 635       | 695                         | NR               | 765       | 4                           | NR               | 895       | 0                           | NR               |
| 380       | 0                           | NR               | 510       | 193                         | NR               | 640       | 181                         | NR               | 770       | 3                           | NR               | 900       | 0                           | NR               |
| 385       | 0                           | NR               | 515       | 206                         | NR               | 645       | 175                         | NR               | 775       | 3                           | NR               | 905       | 0                           | NR               |
| 390       | 0                           | NR               | 520       | 213                         | NR               | 650       | 156                         | NR               | 780       | 2                           | NR               | 910       | 0                           | NR               |
| 395       | 1                           | NR               | 525       | 219                         | NR               | 655       | 127                         | NR               | 785       | 2                           | NR               | 915       | 0                           | NR               |
| 400       | 2                           | NR               | 530       | 223                         | NR               | 660       | 108                         | NR               | 790       | 2                           | NR               | 920       | 0                           | NR               |
| 405       | 2                           | NR               | 535       | 226                         | NR               | 665       | 89                          | NR               | 795       | 2                           | NR               | 925       | 0                           | NR               |
| 410       | 4                           | NR               | 540       | 230                         | NR               | 670       | 84                          | NR               | 800       | 1                           | NR               | 930       | 0                           | NR               |
| 415       | 6                           | NR               | 545       | 235                         | NR               | 675       | 67                          | NR               | 805       | 1                           | NR               | 935       | 0                           | NR               |
| 420       | 11                          | NR               | 550       | 239                         | NR               | 680       | 57                          | NR               | 810       | 1                           | NR               | 940       | 0                           | NR               |
| 425       | 19                          | NR               | 555       | 243                         | NR               | 685       | 50                          | NR               | 815       | 1                           | NR               | 945       | 0                           | NR               |
| 430       | 34                          | NR               | 560       | 248                         | NR               | 690       | 42                          | NR               | 820       | 1                           | NR               | 950       | 0                           | NR               |
| 435       | 60                          | NR               | 565       | 253                         | NR               | 695       | 36                          | NR               | 825       | 1                           | NR               | 955       | 0                           | NR               |
| 440       | 106                         | NR               | 570       | 256                         | NR               | 700       | 31                          | NR               | 830       | 0                           | NR               | 960       | 0                           | NR               |
| 445       | 193                         | NR               | 575       | 260                         | NR               | 705       | 26                          | NR               | 835       | 0                           | NR               | 965       | 0                           | NR               |
| 450       | 283                         | NR               | 580       | 263                         | NR               | 710       | 22                          | NR               | 840       | 0                           | NR               | 970       | 0                           | NR               |
| 455       | 234                         | NR               | 585       | 266                         | NR               | 715       | 19                          | NR               | 845       | 0                           | NR               | 975       | 0                           | NR               |
| 460       | 157                         | NR               | 590       | 267                         | NR               | 720       | 16                          | NR               | 850       | 0                           | NR               | 980       | 0                           | NR               |
| 465       | 134                         | NR               | 595       | 266                         | NR               | 725       | 14                          | NR               | 855       | 0                           | NR               | 985       | 0                           | NR               |
| 470       | 107                         | NR               | 600       | 268                         | NR               | 730       | 12                          | NR               | 860       | 0                           | NR               | 990       | 0                           | NR               |
| 475       | 85                          | NR               | 605       | 269                         | NR               | 735       | 10                          | NR               | 865       | 0                           | NR               | 995       | 0                           | NR               |
| 480       | 85                          | NR               | 610       | 309                         | NR               | 740       | 8                           | NR               | 870       | 0                           | NR               | 1000      | 0                           | NR               |
| 485       | 96                          | NR               | 615       | 345                         | NR               | 745       | 7                           | NR               | 875       | 0                           | NR               |           |                             |                  |

REPORT NUMBER: SP3-2508-516-6

### Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.61

| λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360    | 0                        | NR            | 490    | 112                      | NR            | 620    | 281                      | NR            | 750    | 6                        | NR            | 880    | 0                        | NR            |
| 365    | 0                        | NR            | 495    | 134                      | NR            | 625    | 286                      | NR            | 755    | 5                        | NR            | 885    | 0                        | NR            |
| 370    | 0                        | NR            | 500    | 157                      | NR            | 630    | 1000                     | NR            | 760    | 4                        | NR            | 890    | 0                        | NR            |
| 375    | 0                        | NR            | 505    | 178                      | NR            | 635    | 695                      | NR            | 765    | 4                        | NR            | 895    | 0                        | NR            |
| 380    | 0                        | NR            | 510    | 193                      | NR            | 640    | 181                      | NR            | 770    | 3                        | NR            | 900    | 0                        | NR            |
| 385    | 0                        | NR            | 515    | 206                      | NR            | 645    | 175                      | NR            | 775    | 3                        | NR            | 905    | 0                        | NR            |
| 390    | 0                        | NR            | 520    | 213                      | NR            | 650    | 156                      | NR            | 780    | 2                        | NR            | 910    | 0                        | NR            |
| 395    | 1                        | NR            | 525    | 219                      | NR            | 655    | 127                      | NR            | 785    | 2                        | NR            | 915    | 0                        | NR            |
| 400    | 2                        | NR            | 530    | 223                      | NR            | 660    | 108                      | NR            | 790    | 2                        | NR            | 920    | 0                        | NR            |
| 405    | 2                        | NR            | 535    | 226                      | NR            | 665    | 89                       | NR            | 795    | 2                        | NR            | 925    | 0                        | NR            |
| 410    | 4                        | NR            | 540    | 230                      | NR            | 670    | 84                       | NR            | 800    | 1                        | NR            | 930    | 0                        | NR            |
| 415    | 6                        | NR            | 545    | 235                      | NR            | 675    | 67                       | NR            | 805    | 1                        | NR            | 935    | 0                        | NR            |
| 420    | 11                       | NR            | 550    | 239                      | NR            | 680    | 57                       | NR            | 810    | 1                        | NR            | 940    | 0                        | NR            |
| 425    | 19                       | NR            | 555    | 243                      | NR            | 685    | 50                       | NR            | 815    | 1                        | NR            | 945    | 0                        | NR            |
| 430    | 34                       | NR            | 560    | 248                      | NR            | 690    | 42                       | NR            | 820    | 1                        | NR            | 950    | 0                        | NR            |
| 435    | 60                       | NR            | 565    | 253                      | NR            | 695    | 36                       | NR            | 825    | 1                        | NR            | 955    | 0                        | NR            |
| 440    | 106                      | NR            | 570    | 256                      | NR            | 700    | 31                       | NR            | 830    | 0                        | NR            | 960    | 0                        | NR            |
| 445    | 193                      | NR            | 575    | 260                      | NR            | 705    | 26                       | NR            | 835    | 0                        | NR            | 965    | 0                        | NR            |
| 450    | 283                      | NR            | 580    | 263                      | NR            | 710    | 22                       | NR            | 840    | 0                        | NR            | 970    | 0                        | NR            |
| 455    | 234                      | NR            | 585    | 266                      | NR            | 715    | 19                       | NR            | 845    | 0                        | NR            | 975    | 0                        | NR            |
| 460    | 157                      | NR            | 590    | 267                      | NR            | 720    | 16                       | NR            | 850    | 0                        | NR            | 980    | 0                        | NR            |
| 465    | 134                      | NR            | 595    | 266                      | NR            | 725    | 14                       | NR            | 855    | 0                        | NR            | 985    | 0                        | NR            |
| 470    | 107                      | NR            | 600    | 268                      | NR            | 730    | 12                       | NR            | 860    | 0                        | NR            | 990    | 0                        | NR            |
| 475    | 85                       | NR            | 605    | 269                      | NR            | 735    | 10                       | NR            | 865    | 0                        | NR            | 995    | 0                        | NR            |
| 480    | 85                       | NR            | 610    | 309                      | NR            | 740    | 8                        | NR            | 870    | 0                        | NR            | 1000   | 0                        | NR            |
| 485    | 96                       | NR            | 615    | 345                      | NR            | 745    | 7                        | NR            | 875    | 0                        | NR            |        |                          |               |

REPORT NUMBER: SP3-2508-516-6

### Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.24

| λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(φ/nm) |
|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|
| 360       | 0                           | NR               | 490       | 112                         | NR               | 620       | 281                         | NR               | 750       | 6                           | NR               | 880       | 0                           | NR               |
| 365       | 0                           | NR               | 495       | 134                         | NR               | 625       | 286                         | NR               | 755       | 5                           | NR               | 885       | 0                           | NR               |
| 370       | 0                           | NR               | 500       | 157                         | NR               | 630       | 1000                        | NR               | 760       | 4                           | NR               | 890       | 0                           | NR               |
| 375       | 0                           | NR               | 505       | 178                         | NR               | 635       | 695                         | NR               | 765       | 4                           | NR               | 895       | 0                           | NR               |
| 380       | 0                           | NR               | 510       | 193                         | NR               | 640       | 181                         | NR               | 770       | 3                           | NR               | 900       | 0                           | NR               |
| 385       | 0                           | NR               | 515       | 206                         | NR               | 645       | 175                         | NR               | 775       | 3                           | NR               | 905       | 0                           | NR               |
| 390       | 0                           | NR               | 520       | 213                         | NR               | 650       | 156                         | NR               | 780       | 2                           | NR               | 910       | 0                           | NR               |
| 395       | 1                           | NR               | 525       | 219                         | NR               | 655       | 127                         | NR               | 785       | 2                           | NR               | 915       | 0                           | NR               |
| 400       | 2                           | NR               | 530       | 223                         | NR               | 660       | 108                         | NR               | 790       | 2                           | NR               | 920       | 0                           | NR               |
| 405       | 2                           | NR               | 535       | 226                         | NR               | 665       | 89                          | NR               | 795       | 2                           | NR               | 925       | 0                           | NR               |
| 410       | 4                           | NR               | 540       | 230                         | NR               | 670       | 84                          | NR               | 800       | 1                           | NR               | 930       | 0                           | NR               |
| 415       | 6                           | NR               | 545       | 235                         | NR               | 675       | 67                          | NR               | 805       | 1                           | NR               | 935       | 0                           | NR               |
| 420       | 11                          | NR               | 550       | 239                         | NR               | 680       | 57                          | NR               | 810       | 1                           | NR               | 940       | 0                           | NR               |
| 425       | 19                          | NR               | 555       | 243                         | NR               | 685       | 50                          | NR               | 815       | 1                           | NR               | 945       | 0                           | NR               |
| 430       | 34                          | NR               | 560       | 248                         | NR               | 690       | 42                          | NR               | 820       | 1                           | NR               | 950       | 0                           | NR               |
| 435       | 60                          | NR               | 565       | 253                         | NR               | 695       | 36                          | NR               | 825       | 1                           | NR               | 955       | 0                           | NR               |
| 440       | 106                         | NR               | 570       | 256                         | NR               | 700       | 31                          | NR               | 830       | 0                           | NR               | 960       | 0                           | NR               |
| 445       | 193                         | NR               | 575       | 260                         | NR               | 705       | 26                          | NR               | 835       | 0                           | NR               | 965       | 0                           | NR               |
| 450       | 283                         | NR               | 580       | 263                         | NR               | 710       | 22                          | NR               | 840       | 0                           | NR               | 970       | 0                           | NR               |
| 455       | 234                         | NR               | 585       | 266                         | NR               | 715       | 19                          | NR               | 845       | 0                           | NR               | 975       | 0                           | NR               |
| 460       | 157                         | NR               | 590       | 267                         | NR               | 720       | 16                          | NR               | 850       | 0                           | NR               | 980       | 0                           | NR               |
| 465       | 134                         | NR               | 595       | 266                         | NR               | 725       | 14                          | NR               | 855       | 0                           | NR               | 985       | 0                           | NR               |
| 470       | 107                         | NR               | 600       | 268                         | NR               | 730       | 12                          | NR               | 860       | 0                           | NR               | 990       | 0                           | NR               |
| 475       | 85                          | NR               | 605       | 269                         | NR               | 735       | 10                          | NR               | 865       | 0                           | NR               | 995       | 0                           | NR               |
| 480       | 85                          | NR               | 610       | 309                         | NR               | 740       | 8                           | NR               | 870       | 0                           | NR               | 1000      | 0                           | NR               |
| 485       | 96                          | NR               | 615       | 345                         | NR               | 745       | 7                           | NR               | 875       | 0                           | NR               |           |                             |                  |

REPORT NUMBER: SP3-2508-516-6

TM-30-18

### Summary

$R_f = 92.6$   
 $R_g = 102$   
 $CIE\ R_a = 96.3$   
 $R_g = 78.4$



### Color Vector Graphics



**Individual Sample Fidelity Index ( $R_{fi}$ )**

|            |            |             |            |
|------------|------------|-------------|------------|
| CES01 = 86 | CES26 = 94 | CES51 = 97  | CES76 = 88 |
| CES02 = 63 | CES27 = 93 | CES52 = 96  | CES77 = 88 |
| CES03 = 32 | CES28 = 96 | CES53 = 95  | CES78 = 84 |
| CES04 = 70 | CES29 = 95 | CES54 = 95  | CES79 = 92 |
| CES05 = 50 | CES30 = 96 | CES55 = 95  | CES80 = 92 |
| CES06 = 51 | CES31 = 95 | CES56 = 98  | CES81 = 77 |
| CES07 = 43 | CES32 = 87 | CES57 = 98  | CES82 = 96 |
| CES08 = 42 | CES33 = 97 | CES58 = 98  | CES83 = 95 |
| CES09 = 29 | CES34 = 93 | CES59 = 100 | CES84 = 95 |
| CES10 = 75 | CES35 = 96 | CES60 = 94  | CES85 = 82 |
| CES11 = 58 | CES36 = 84 | CES61 = 95  | CES86 = 84 |
| CES12 = 64 | CES37 = 93 | CES62 = 90  | CES87 = 92 |
| CES13 = 44 | CES38 = 91 | CES63 = 95  | CES88 = 99 |
| CES14 = 74 | CES39 = 98 | CES64 = 95  | CES89 = 86 |
| CES15 = 72 | CES40 = 96 | CES65 = 92  | CES90 = 98 |
| CES16 = 48 | CES41 = 97 | CES66 = 93  | CES91 = 77 |
| CES17 = 49 | CES42 = 90 | CES67 = 92  | CES92 = 81 |
| CES18 = 56 | CES43 = 91 | CES68 = 91  | CES93 = 88 |
| CES19 = 71 | CES44 = 99 | CES69 = 92  | CES94 = 78 |
| CES20 = 67 | CES45 = 94 | CES70 = 89  | CES95 = 86 |
| CES21 = 86 | CES46 = 95 | CES71 = 85  | CES96 = 93 |
| CES22 = 78 | CES47 = 90 | CES72 = 95  | CES97 = 93 |
| CES23 = 91 | CES48 = 96 | CES73 = 84  | CES98 = 96 |
| CES24 = 90 | CES49 = 93 | CES74 = 91  | CES99 = 97 |
| CES25 = 71 | CES50 = 97 | CES75 = 86  |            |



**Color Rendition by Hue-Angle Bin**


**Measure Comparisons**



(END OF REPORT)