

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: METALUX

Report Number: P982863

Luminaire Tested: 24CZ-LD5-65SE-UNV-L830-CD1-U

Issue Date: 04/23/2025

**Test Information**

Test Method: LM-79-2019  
Report Number: P982863  
Test Lab: INNOVATION CENTER(P3)  
Issue Date: 04/23/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: METALUX  
Catalog Number: 24CZ-LD5-65SE-UNV-L830-CD1-U  
Description: METALUX CRUZE 2x4 6500LM STANDARD EFFICACY PACKAGE 80CRI 3000K TROFFER STANDARD  
Light Source: 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5939.0 lumens  
Efficiency: N/A  
Efficacy: 118.5 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.26 / 1.35  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 50.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT

TEST NUMBER: P982863

CATALOG NUMBER: 24CZ-LD5-65SE-UNV-L830-CD1-U

### Luminous Intensity Polar Plot

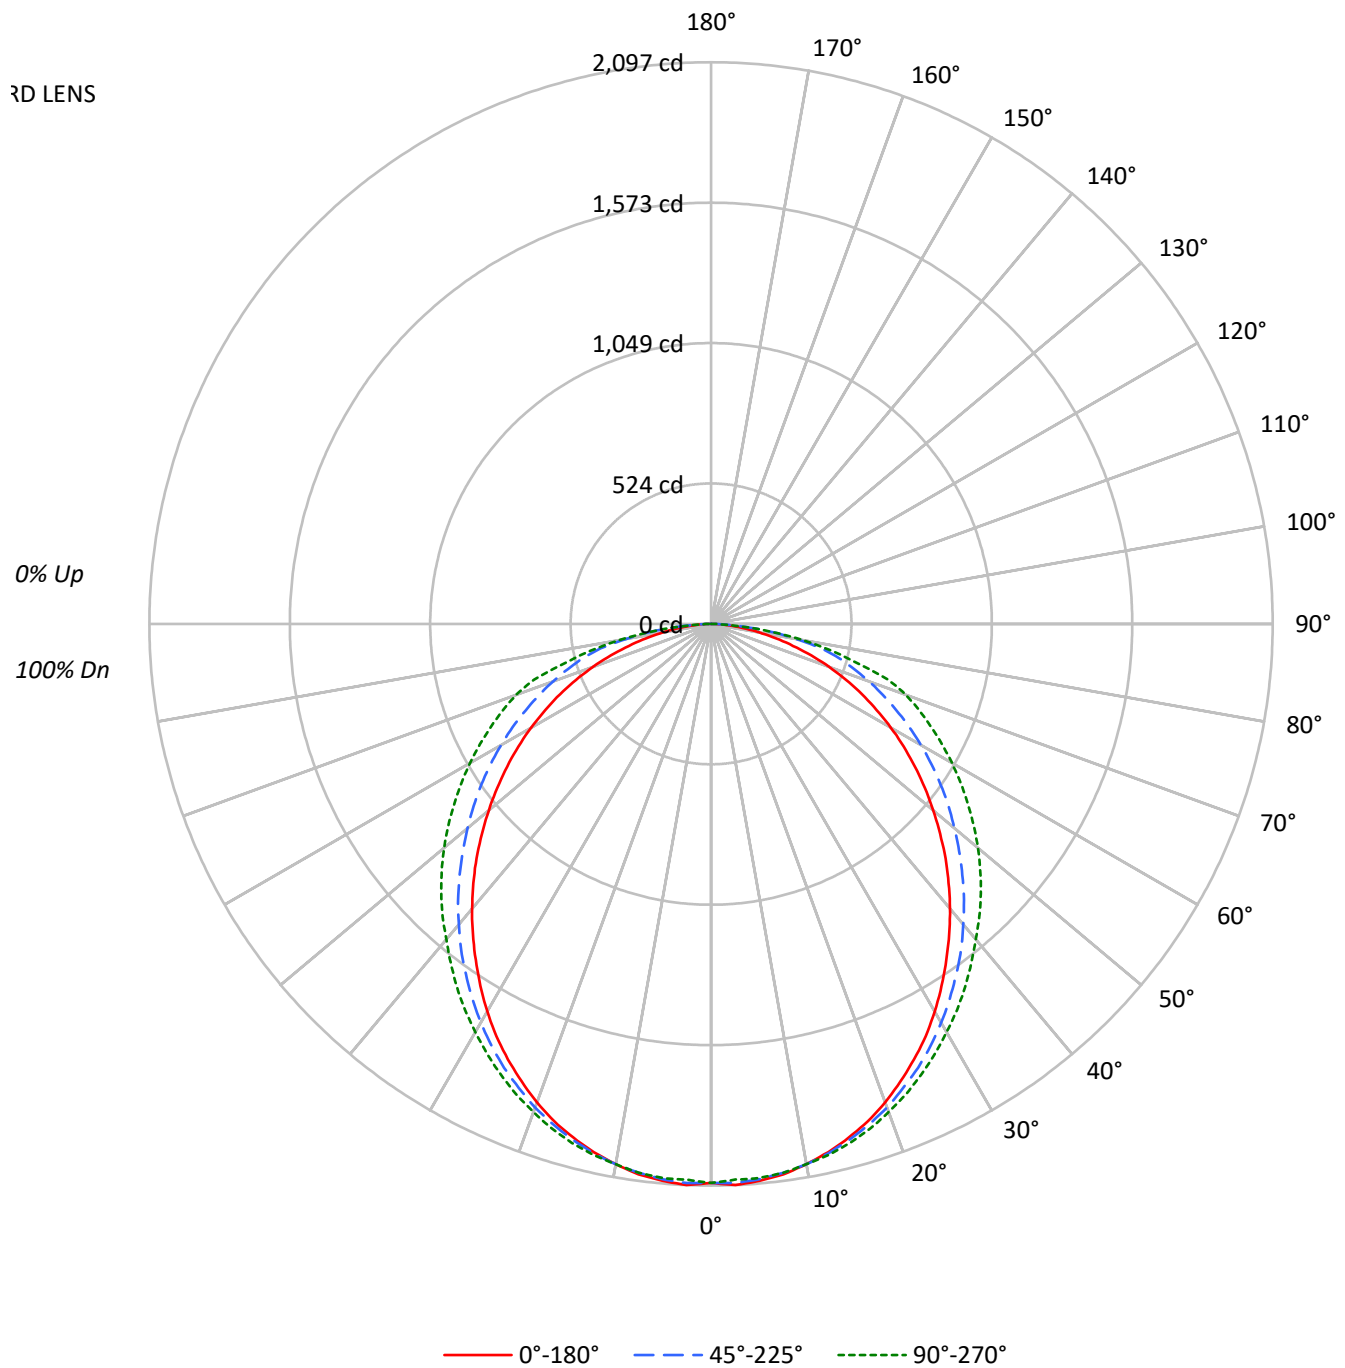

TEST NUMBER: P982863

CATALOG NUMBER: 24CZ-LD5-65SE-UNV-L830-CD1-U

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 108 | 103 | 99  | 95  | 106 | 101 | 97  | 93  | 97  | 93  | 90  |  | 93  | 90  | 88  |  | 89  |
| 2   | 98  | 90  | 83  | 77  | 96  | 88  | 81  | 76  | 84  | 79  | 74  |  | 81  | 76  | 72  |  | 78  |
| 3   | 89  | 79  | 70  | 63  | 87  | 77  | 69  | 63  | 74  | 67  | 62  |  | 71  | 65  | 61  |  | 69  |
| 4   | 82  | 69  | 60  | 54  | 79  | 68  | 60  | 53  | 66  | 58  | 52  |  | 63  | 57  | 52  |  | 61  |
| 5   | 75  | 62  | 53  | 46  | 73  | 61  | 52  | 46  | 59  | 51  | 45  |  | 57  | 50  | 45  |  | 55  |
| 6   | 69  | 56  | 47  | 40  | 67  | 55  | 46  | 40  | 53  | 45  | 40  |  | 51  | 44  | 39  |  | 50  |
| 7   | 64  | 51  | 42  | 35  | 63  | 50  | 41  | 35  | 48  | 41  | 35  |  | 47  | 40  | 35  |  | 45  |
| 8   | 60  | 46  | 38  | 32  | 58  | 45  | 37  | 32  | 44  | 37  | 31  |  | 43  | 36  | 31  |  | 42  |
| 9   | 56  | 42  | 34  | 28  | 55  | 42  | 34  | 28  | 41  | 33  | 28  |  | 40  | 33  | 28  |  | 39  |
| 10  | 52  | 39  | 31  | 26  | 51  | 39  | 31  | 26  | 38  | 31  | 26  |  | 37  | 30  | 26  |  | 36  |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°   | 45°  | 90°  |
|-----|------|------|------|
| 0°  | 2808 | 2808 | 2808 |
| 5°  | 2819 | 2811 | 2805 |
| 10° | 2799 | 2799 | 2799 |
| 15° | 2766 | 2778 | 2795 |
| 20° | 2722 | 2751 | 2777 |
| 25° | 2663 | 2714 | 2756 |
| 30° | 2596 | 2671 | 2734 |
| 35° | 2515 | 2622 | 2718 |
| 40° | 2438 | 2573 | 2700 |
| 45° | 2357 | 2526 | 2710 |
| 50° | 2267 | 2483 | 2723 |
| 55° | 2180 | 2455 | 2744 |
| 60° | 2088 | 2436 | 2794 |
| 65° | 1981 | 2431 | 2882 |
| 70° | 1844 | 2472 | 3044 |
| 75° | 1649 | 2573 | 2920 |
| 80° | 1409 | 2458 | 2677 |
| 85° | 1091 | 1964 | 1871 |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
Vertical Angle: 72.5°  
Luminance: 3101 cd/sqm

TEST NUMBER: P982863

CATALOG NUMBER: 24CZ-LD5-65SE-UNV-L830-CD1-U

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 197.4  | 3.3       |
| 10°-20°   | 561.7  | 9.5       |
| 20°-30°   | 839.7  | 14.1      |
| 30°-40°   | 995.7  | 16.8      |
| 40°-50°   | 1024.0 | 17.2      |
| 50°-60°   | 936.6  | 15.8      |
| 60°-70°   | 755.4  | 12.7      |
| 70°-80°   | 490.5  | 8.3       |
| 80°-90°   | 138.0  | 2.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1598.8 | 26.9      |
| 0°-40°    | 2594.5 | 43.7      |
| 0°-60°    | 4555.1 | 76.7      |
| 0°-90°    | 5939.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 5939.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | 22.5° | 45°  | 67.5° | 90°  | Flux |
|-----|------|-------|------|-------|------|------|
| 0°  | 2087 | 2087  | 2087 | 2087  | 2087 |      |
| 5°  | 2087 | 2073  | 2081 | 2077  | 2077 | 198  |
| 15° | 1986 | 1976  | 1994 | 2002  | 2006 | 560  |
| 25° | 1794 | 1794  | 1828 | 1843  | 1857 | 826  |
| 35° | 1531 | 1546  | 1596 | 1628  | 1655 | 958  |
| 45° | 1238 | 1261  | 1327 | 1388  | 1424 | 955  |
| 55° | 929  | 960   | 1046 | 1129  | 1170 | 831  |
| 65° | 622  | 659   | 764  | 863   | 905  | 615  |
| 75° | 317  | 376   | 495  | 556   | 562  | 338  |
| 85° | 71   | 117   | 127  | 125   | 121  | 85   |
| 90° | 0    | 0     | 0    | 0     | 0    |      |

TEST NUMBER: P982863

CATALOG NUMBER: 24CZ-LD5-65SE-UNV-L830-CD1-U

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|-------|--------|--------|--------|--------|--------|
| 0°    | 2087.0 | 2087.0 | 2087.0 | 2087.0 | 2087.0 |
| 2.5°  | 2097.2 | 2081.0 | 2089.1 | 2085.0 | 2076.9 |
| 5°    | 2087.0 | 2072.9 | 2081.0 | 2076.9 | 2076.9 |
| 7.5°  | 2072.9 | 2058.7 | 2066.8 | 2066.8 | 2066.8 |
| 10°   | 2048.6 | 2036.5 | 2048.6 | 2048.6 | 2048.6 |
| 12.5° | 2020.3 | 2010.3 | 2024.4 | 2026.4 | 2030.5 |
| 15°   | 1986.0 | 1975.9 | 1994.1 | 2002.2 | 2006.2 |
| 17.5° | 1947.6 | 1939.6 | 1959.8 | 1969.8 | 1975.9 |
| 20°   | 1901.2 | 1895.1 | 1921.3 | 1931.5 | 1939.6 |
| 22.5° | 1848.6 | 1848.6 | 1874.9 | 1887.0 | 1901.2 |
| 25°   | 1794.1 | 1794.1 | 1828.4 | 1842.6 | 1856.7 |
| 27.5° | 1735.5 | 1737.5 | 1775.9 | 1796.1 | 1810.2 |
| 30°   | 1670.9 | 1679.0 | 1719.3 | 1743.6 | 1759.7 |
| 32.5° | 1602.1 | 1612.3 | 1658.7 | 1689.0 | 1709.2 |
| 35°   | 1531.4 | 1545.6 | 1596.1 | 1628.4 | 1654.7 |
| 37.5° | 1460.7 | 1478.9 | 1533.5 | 1569.8 | 1596.1 |
| 40°   | 1388.0 | 1408.2 | 1464.7 | 1507.1 | 1537.5 |
| 42.5° | 1313.2 | 1335.4 | 1398.1 | 1446.6 | 1483.0 |
| 45°   | 1238.5 | 1260.7 | 1327.3 | 1388.0 | 1424.4 |
| 47.5° | 1159.7 | 1186.0 | 1256.7 | 1327.3 | 1363.7 |
| 50°   | 1082.9 | 1111.2 | 1186.0 | 1262.7 | 1301.1 |
| 52.5° | 1006.2 | 1038.4 | 1117.2 | 1198.1 | 1236.5 |
| 55°   | 929.3  | 959.6  | 1046.5 | 1129.4 | 1169.8 |
| 57.5° | 852.6  | 884.9  | 975.8  | 1062.7 | 1105.1 |
| 60°   | 775.9  | 810.2  | 905.1  | 996.0  | 1038.4 |
| 62.5° | 697.0  | 733.4  | 834.4  | 929.3  | 971.8  |
| 65°   | 622.3  | 658.7  | 763.7  | 862.7  | 905.1  |
| 67.5° | 545.5  | 585.9  | 695.0  | 796.0  | 840.5  |
| 70°   | 468.7  | 513.2  | 628.3  | 729.3  | 773.8  |
| 72.5° | 392.0  | 442.5  | 559.7  | 660.7  | 693.0  |
| 75°   | 317.2  | 375.8  | 495.0  | 555.6  | 561.6  |
| 77.5° | 248.5  | 309.1  | 422.3  | 446.5  | 458.6  |
| 80°   | 181.8  | 248.5  | 317.2  | 347.5  | 345.5  |
| 82.5° | 121.2  | 189.9  | 228.3  | 232.4  | 228.3  |
| 85°   | 70.7   | 117.2  | 127.2  | 125.3  | 121.2  |
| 87.5° | 30.3   | 46.5   | 40.4   | 34.3   | 28.3   |
| 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP3-2508-516-5

Test Date: 09/03/2025

Luminaire Tested: 24CZ-LD5-65-S-UNV-L930-CD1-U

Data in this report applies to families of products including 24CZ-LD5-65-S-UNV-L930-CD1-U

### Test Information

Test Method: LM-79-2019  
 Report Number: SP3-2508-516-5  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP3 - 3M SPHERE  
 Measurement Geometry:  $4\pi$   
 Issue Date: 09/05/2025  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Metalux  
 Catalog Number: **24CZ-LD5-65-S-UNV-L930-CD1-U**  
 Description: 2X4 CRUZE SB 6500LM 930 SMOOTH LENS

### Spectral Parameters

CCT (K): 2988  
 CIE  $u'$ : 0.2517  
 CIE  $v'$ : 0.5189  
 Duv: -0.0019  
 CIE x: 0.4350  
 CIE y: 0.3986  
 CIE z: 0.1665  
 Peak Wavelength (nm): 630  
 Dominant Wavelength (nm): 583  
 Purity: 50.17903  
 R<sub>f</sub>: 91.6  
 R<sub>g</sub>: 101.1

CRI (Ra): 94.3  
 R1: 96.3  
 R2: 97.6  
 R3: 97.5  
 R4: 95.8  
 R5: 96.1  
 R6: 96.2  
 R7: 91.6  
 R8: 83.5  
 R9: 61.9  
 R10: 93.0  
 R11: 96.3  
 R12: 85.8  
 R13: 96.7  
 R14: 97.5  
 R15: 91.8



### Test Conditions

Stabilization Time: 21M  
 Operation Time: 1H 21M  
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP3-2508-516-5

| Measurement and Test Equipment |                       |                  |                      |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument                     | Identification Number | Calibration Date | Calibration Due Date |
| Photometer                     | 3M SPHERE IN02505     | 7/1/2025         | 1/1/2026             |
| Power Meter                    | XITRON INXT2011006    | 1/20/2025        | 1/20/2026            |
| AC Power Source                | CHROMA 61604 IN6064A  | 10/22/2024       | 10/22/2025           |
| DC Power Source                | EYSIGHT N5770A IN0534 | 10/22/2024       | 10/22/2025           |
| Sphere Thermometer             | TANDD IN4036E         | 10/22/2024       | 10/22/2025           |
|                                |                       |                  |                      |

REPORT NUMBER: SP3-2508-516-5

**CIE 1931 Chromaticity Diagram**



**CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles**



Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP3-2508-516-5

### Photopic Flux vs. Wavelength



### Photopic Lumens: NR

| λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) |
|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|
| 360       | 0                           | NR               | 490       | 101                         | NR               | 620       | 329                         | NR               | 750       | 8                           | NR               | 880       | 0                           | NR               |
| 365       | 0                           | NR               | 495       | 121                         | NR               | 625       | 331                         | NR               | 755       | 7                           | NR               | 885       | 0                           | NR               |
| 370       | 0                           | NR               | 500       | 143                         | NR               | 630       | 1000                        | NR               | 760       | 6                           | NR               | 890       | 0                           | NR               |
| 375       | 0                           | NR               | 505       | 161                         | NR               | 635       | 709                         | NR               | 765       | 5                           | NR               | 895       | 0                           | NR               |
| 380       | 0                           | NR               | 510       | 176                         | NR               | 640       | 220                         | NR               | 770       | 4                           | NR               | 900       | 0                           | NR               |
| 385       | 0                           | NR               | 515       | 189                         | NR               | 645       | 210                         | NR               | 775       | 3                           | NR               | 905       | 0                           | NR               |
| 390       | 0                           | NR               | 520       | 196                         | NR               | 650       | 188                         | NR               | 780       | 3                           | NR               | 910       | 0                           | NR               |
| 395       | 1                           | NR               | 525       | 203                         | NR               | 655       | 156                         | NR               | 785       | 2                           | NR               | 915       | 0                           | NR               |
| 400       | 1                           | NR               | 530       | 208                         | NR               | 660       | 134                         | NR               | 790       | 2                           | NR               | 920       | 0                           | NR               |
| 405       | 2                           | NR               | 535       | 213                         | NR               | 665       | 112                         | NR               | 795       | 2                           | NR               | 925       | 0                           | NR               |
| 410       | 3                           | NR               | 540       | 219                         | NR               | 670       | 104                         | NR               | 800       | 1                           | NR               | 930       | 0                           | NR               |
| 415       | 6                           | NR               | 545       | 226                         | NR               | 675       | 85                          | NR               | 805       | 1                           | NR               | 935       | 0                           | NR               |
| 420       | 10                          | NR               | 550       | 233                         | NR               | 680       | 72                          | NR               | 810       | 1                           | NR               | 940       | 0                           | NR               |
| 425       | 17                          | NR               | 555       | 241                         | NR               | 685       | 63                          | NR               | 815       | 1                           | NR               | 945       | 0                           | NR               |
| 430       | 30                          | NR               | 560       | 250                         | NR               | 690       | 53                          | NR               | 820       | 1                           | NR               | 950       | 0                           | NR               |
| 435       | 53                          | NR               | 565       | 260                         | NR               | 695       | 46                          | NR               | 825       | 1                           | NR               | 955       | 0                           | NR               |
| 440       | 92                          | NR               | 570       | 270                         | NR               | 700       | 39                          | NR               | 830       | 1                           | NR               | 960       | 0                           | NR               |
| 445       | 160                         | NR               | 575       | 280                         | NR               | 705       | 33                          | NR               | 835       | 1                           | NR               | 965       | 0                           | NR               |
| 450       | 214                         | NR               | 580       | 289                         | NR               | 710       | 28                          | NR               | 840       | 0                           | NR               | 970       | 0                           | NR               |
| 455       | 183                         | NR               | 585       | 298                         | NR               | 715       | 24                          | NR               | 845       | 0                           | NR               | 975       | 0                           | NR               |
| 460       | 133                         | NR               | 590       | 305                         | NR               | 720       | 20                          | NR               | 850       | 0                           | NR               | 980       | 0                           | NR               |
| 465       | 111                         | NR               | 595       | 309                         | NR               | 725       | 17                          | NR               | 855       | 0                           | NR               | 985       | 0                           | NR               |
| 470       | 91                          | NR               | 600       | 314                         | NR               | 730       | 15                          | NR               | 860       | 0                           | NR               | 990       | 0                           | NR               |
| 475       | 77                          | NR               | 605       | 318                         | NR               | 735       | 13                          | NR               | 865       | 0                           | NR               | 995       | 0                           | NR               |
| 480       | 76                          | NR               | 610       | 356                         | NR               | 740       | 11                          | NR               | 870       | 0                           | NR               | 1000      | 0                           | NR               |
| 485       | 86                          | NR               | 615       | 390                         | NR               | 745       | 9                           | NR               | 875       | 0                           | NR               |           |                             |                  |

REPORT NUMBER: SP3-2508-516-5

### Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.43

| λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (Φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360    | 0                        | NR            | 490    | 101                      | NR            | 620    | 329                      | NR            | 750    | 8                        | NR            | 880    | 0                        | NR            |
| 365    | 0                        | NR            | 495    | 121                      | NR            | 625    | 331                      | NR            | 755    | 7                        | NR            | 885    | 0                        | NR            |
| 370    | 0                        | NR            | 500    | 143                      | NR            | 630    | 1000                     | NR            | 760    | 6                        | NR            | 890    | 0                        | NR            |
| 375    | 0                        | NR            | 505    | 161                      | NR            | 635    | 709                      | NR            | 765    | 5                        | NR            | 895    | 0                        | NR            |
| 380    | 0                        | NR            | 510    | 176                      | NR            | 640    | 220                      | NR            | 770    | 4                        | NR            | 900    | 0                        | NR            |
| 385    | 0                        | NR            | 515    | 189                      | NR            | 645    | 210                      | NR            | 775    | 3                        | NR            | 905    | 0                        | NR            |
| 390    | 0                        | NR            | 520    | 196                      | NR            | 650    | 188                      | NR            | 780    | 3                        | NR            | 910    | 0                        | NR            |
| 395    | 1                        | NR            | 525    | 203                      | NR            | 655    | 156                      | NR            | 785    | 2                        | NR            | 915    | 0                        | NR            |
| 400    | 1                        | NR            | 530    | 208                      | NR            | 660    | 134                      | NR            | 790    | 2                        | NR            | 920    | 0                        | NR            |
| 405    | 2                        | NR            | 535    | 213                      | NR            | 665    | 112                      | NR            | 795    | 2                        | NR            | 925    | 0                        | NR            |
| 410    | 3                        | NR            | 540    | 219                      | NR            | 670    | 104                      | NR            | 800    | 1                        | NR            | 930    | 0                        | NR            |
| 415    | 6                        | NR            | 545    | 226                      | NR            | 675    | 85                       | NR            | 805    | 1                        | NR            | 935    | 0                        | NR            |
| 420    | 10                       | NR            | 550    | 233                      | NR            | 680    | 72                       | NR            | 810    | 1                        | NR            | 940    | 0                        | NR            |
| 425    | 17                       | NR            | 555    | 241                      | NR            | 685    | 63                       | NR            | 815    | 1                        | NR            | 945    | 0                        | NR            |
| 430    | 30                       | NR            | 560    | 250                      | NR            | 690    | 53                       | NR            | 820    | 1                        | NR            | 950    | 0                        | NR            |
| 435    | 53                       | NR            | 565    | 260                      | NR            | 695    | 46                       | NR            | 825    | 1                        | NR            | 955    | 0                        | NR            |
| 440    | 92                       | NR            | 570    | 270                      | NR            | 700    | 39                       | NR            | 830    | 1                        | NR            | 960    | 0                        | NR            |
| 445    | 160                      | NR            | 575    | 280                      | NR            | 705    | 33                       | NR            | 835    | 1                        | NR            | 965    | 0                        | NR            |
| 450    | 214                      | NR            | 580    | 289                      | NR            | 710    | 28                       | NR            | 840    | 0                        | NR            | 970    | 0                        | NR            |
| 455    | 183                      | NR            | 585    | 298                      | NR            | 715    | 24                       | NR            | 845    | 0                        | NR            | 975    | 0                        | NR            |
| 460    | 133                      | NR            | 590    | 305                      | NR            | 720    | 20                       | NR            | 850    | 0                        | NR            | 980    | 0                        | NR            |
| 465    | 111                      | NR            | 595    | 309                      | NR            | 725    | 17                       | NR            | 855    | 0                        | NR            | 985    | 0                        | NR            |
| 470    | 91                       | NR            | 600    | 314                      | NR            | 730    | 15                       | NR            | 860    | 0                        | NR            | 990    | 0                        | NR            |
| 475    | 77                       | NR            | 605    | 318                      | NR            | 735    | 13                       | NR            | 865    | 0                        | NR            | 995    | 0                        | NR            |
| 480    | 76                       | NR            | 610    | 356                      | NR            | 740    | 11                       | NR            | 870    | 0                        | NR            | 1000   | 0                        | NR            |
| 485    | 86                       | NR            | 615    | 390                      | NR            | 745    | 9                        | NR            | 875    | 0                        | NR            |        |                          |               |

REPORT NUMBER: SP3-2508-516-5

### Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 2.8

| λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) | λ<br>(nm) | Power<br>W <sup>^</sup> /nm | Lumens<br>(φ/nm) |
|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|
| 360       | 0                           | NR               | 490       | 101                         | NR               | 620       | 329                         | NR               | 750       | 8                           | NR               | 880       | 0                           | NR               |
| 365       | 0                           | NR               | 495       | 121                         | NR               | 625       | 331                         | NR               | 755       | 7                           | NR               | 885       | 0                           | NR               |
| 370       | 0                           | NR               | 500       | 143                         | NR               | 630       | 1000                        | NR               | 760       | 6                           | NR               | 890       | 0                           | NR               |
| 375       | 0                           | NR               | 505       | 161                         | NR               | 635       | 709                         | NR               | 765       | 5                           | NR               | 895       | 0                           | NR               |
| 380       | 0                           | NR               | 510       | 176                         | NR               | 640       | 220                         | NR               | 770       | 4                           | NR               | 900       | 0                           | NR               |
| 385       | 0                           | NR               | 515       | 189                         | NR               | 645       | 210                         | NR               | 775       | 3                           | NR               | 905       | 0                           | NR               |
| 390       | 0                           | NR               | 520       | 196                         | NR               | 650       | 188                         | NR               | 780       | 3                           | NR               | 910       | 0                           | NR               |
| 395       | 1                           | NR               | 525       | 203                         | NR               | 655       | 156                         | NR               | 785       | 2                           | NR               | 915       | 0                           | NR               |
| 400       | 1                           | NR               | 530       | 208                         | NR               | 660       | 134                         | NR               | 790       | 2                           | NR               | 920       | 0                           | NR               |
| 405       | 2                           | NR               | 535       | 213                         | NR               | 665       | 112                         | NR               | 795       | 2                           | NR               | 925       | 0                           | NR               |
| 410       | 3                           | NR               | 540       | 219                         | NR               | 670       | 104                         | NR               | 800       | 1                           | NR               | 930       | 0                           | NR               |
| 415       | 6                           | NR               | 545       | 226                         | NR               | 675       | 85                          | NR               | 805       | 1                           | NR               | 935       | 0                           | NR               |
| 420       | 10                          | NR               | 550       | 233                         | NR               | 680       | 72                          | NR               | 810       | 1                           | NR               | 940       | 0                           | NR               |
| 425       | 17                          | NR               | 555       | 241                         | NR               | 685       | 63                          | NR               | 815       | 1                           | NR               | 945       | 0                           | NR               |
| 430       | 30                          | NR               | 560       | 250                         | NR               | 690       | 53                          | NR               | 820       | 1                           | NR               | 950       | 0                           | NR               |
| 435       | 53                          | NR               | 565       | 260                         | NR               | 695       | 46                          | NR               | 825       | 1                           | NR               | 955       | 0                           | NR               |
| 440       | 92                          | NR               | 570       | 270                         | NR               | 700       | 39                          | NR               | 830       | 1                           | NR               | 960       | 0                           | NR               |
| 445       | 160                         | NR               | 575       | 280                         | NR               | 705       | 33                          | NR               | 835       | 1                           | NR               | 965       | 0                           | NR               |
| 450       | 214                         | NR               | 580       | 289                         | NR               | 710       | 28                          | NR               | 840       | 0                           | NR               | 970       | 0                           | NR               |
| 455       | 183                         | NR               | 585       | 298                         | NR               | 715       | 24                          | NR               | 845       | 0                           | NR               | 975       | 0                           | NR               |
| 460       | 133                         | NR               | 590       | 305                         | NR               | 720       | 20                          | NR               | 850       | 0                           | NR               | 980       | 0                           | NR               |
| 465       | 111                         | NR               | 595       | 309                         | NR               | 725       | 17                          | NR               | 855       | 0                           | NR               | 985       | 0                           | NR               |
| 470       | 91                          | NR               | 600       | 314                         | NR               | 730       | 15                          | NR               | 860       | 0                           | NR               | 990       | 0                           | NR               |
| 475       | 77                          | NR               | 605       | 318                         | NR               | 735       | 13                          | NR               | 865       | 0                           | NR               | 995       | 0                           | NR               |
| 480       | 76                          | NR               | 610       | 356                         | NR               | 740       | 11                          | NR               | 870       | 0                           | NR               | 1000      | 0                           | NR               |
| 485       | 86                          | NR               | 615       | 390                         | NR               | 745       | 9                           | NR               | 875       | 0                           | NR               |           |                             |                  |

REPORT NUMBER: SP3-2508-516-5

TM-30-18

### Summary

$R_f = 91.6$   
 $R_g = 101.1$   
 CIE  $R_a = 94.3$   
 $R_9 = 61.9$



### Color Vector Graphics



**Individual Sample Fidelity Index ( $R_{f,i}$ )**

|            |            |            |            |
|------------|------------|------------|------------|
| CES01 = 86 | CES26 = 92 | CES51 = 97 | CES76 = 89 |
| CES02 = 63 | CES27 = 95 | CES52 = 96 | CES77 = 85 |
| CES03 = 32 | CES28 = 96 | CES53 = 94 | CES78 = 86 |
| CES04 = 70 | CES29 = 92 | CES54 = 97 | CES79 = 89 |
| CES05 = 51 | CES30 = 99 | CES55 = 96 | CES80 = 91 |
| CES06 = 51 | CES31 = 93 | CES56 = 96 | CES81 = 72 |
| CES07 = 44 | CES32 = 85 | CES57 = 96 | CES82 = 96 |
| CES08 = 42 | CES33 = 94 | CES58 = 96 | CES83 = 93 |
| CES09 = 29 | CES34 = 93 | CES59 = 99 | CES84 = 96 |
| CES10 = 76 | CES35 = 96 | CES60 = 95 | CES85 = 80 |
| CES11 = 59 | CES36 = 87 | CES61 = 95 | CES86 = 78 |
| CES12 = 65 | CES37 = 94 | CES62 = 93 | CES87 = 91 |
| CES13 = 44 | CES38 = 96 | CES63 = 94 | CES88 = 97 |
| CES14 = 74 | CES39 = 98 | CES64 = 95 | CES89 = 82 |
| CES15 = 72 | CES40 = 95 | CES65 = 91 | CES90 = 98 |
| CES16 = 48 | CES41 = 96 | CES66 = 93 | CES91 = 81 |
| CES17 = 50 | CES42 = 92 | CES67 = 92 | CES92 = 78 |
| CES18 = 57 | CES43 = 90 | CES68 = 92 | CES93 = 87 |
| CES19 = 72 | CES44 = 99 | CES69 = 93 | CES94 = 73 |
| CES20 = 67 | CES45 = 94 | CES70 = 89 | CES95 = 85 |
| CES21 = 86 | CES46 = 94 | CES71 = 88 | CES96 = 92 |
| CES22 = 79 | CES47 = 88 | CES72 = 95 | CES97 = 94 |
| CES23 = 92 | CES48 = 95 | CES73 = 85 | CES98 = 94 |
| CES24 = 91 | CES49 = 92 | CES74 = 90 | CES99 = 93 |
| CES25 = 72 | CES50 = 97 | CES75 = 88 |            |



Color Rendition by Hue-Angle Bin



**Measure Comparisons**



(END OF REPORT)