

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1011084

Luminaire Tested: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

Issue Date: 5/7/2025

**Test Information**

Test Method: LM-79-2019  
Report Number: P1011084  
REPORT IS A COMBINATION OF REPORTS P989114 AND P1007351  
Test Lab: INNOVATION CENTER  
Issue Date: 5/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4  
Description: Define 3 Direct/Indirect Pendant with 3500K BioUP LEDs {m-DER=0.721} {m-EER=0.792}  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 8568.0 lumens  
Efficiency: N/A  
Efficacy: 104.7 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.37 / 1.5  
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 81.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

### Luminous Intensity Polar Plot

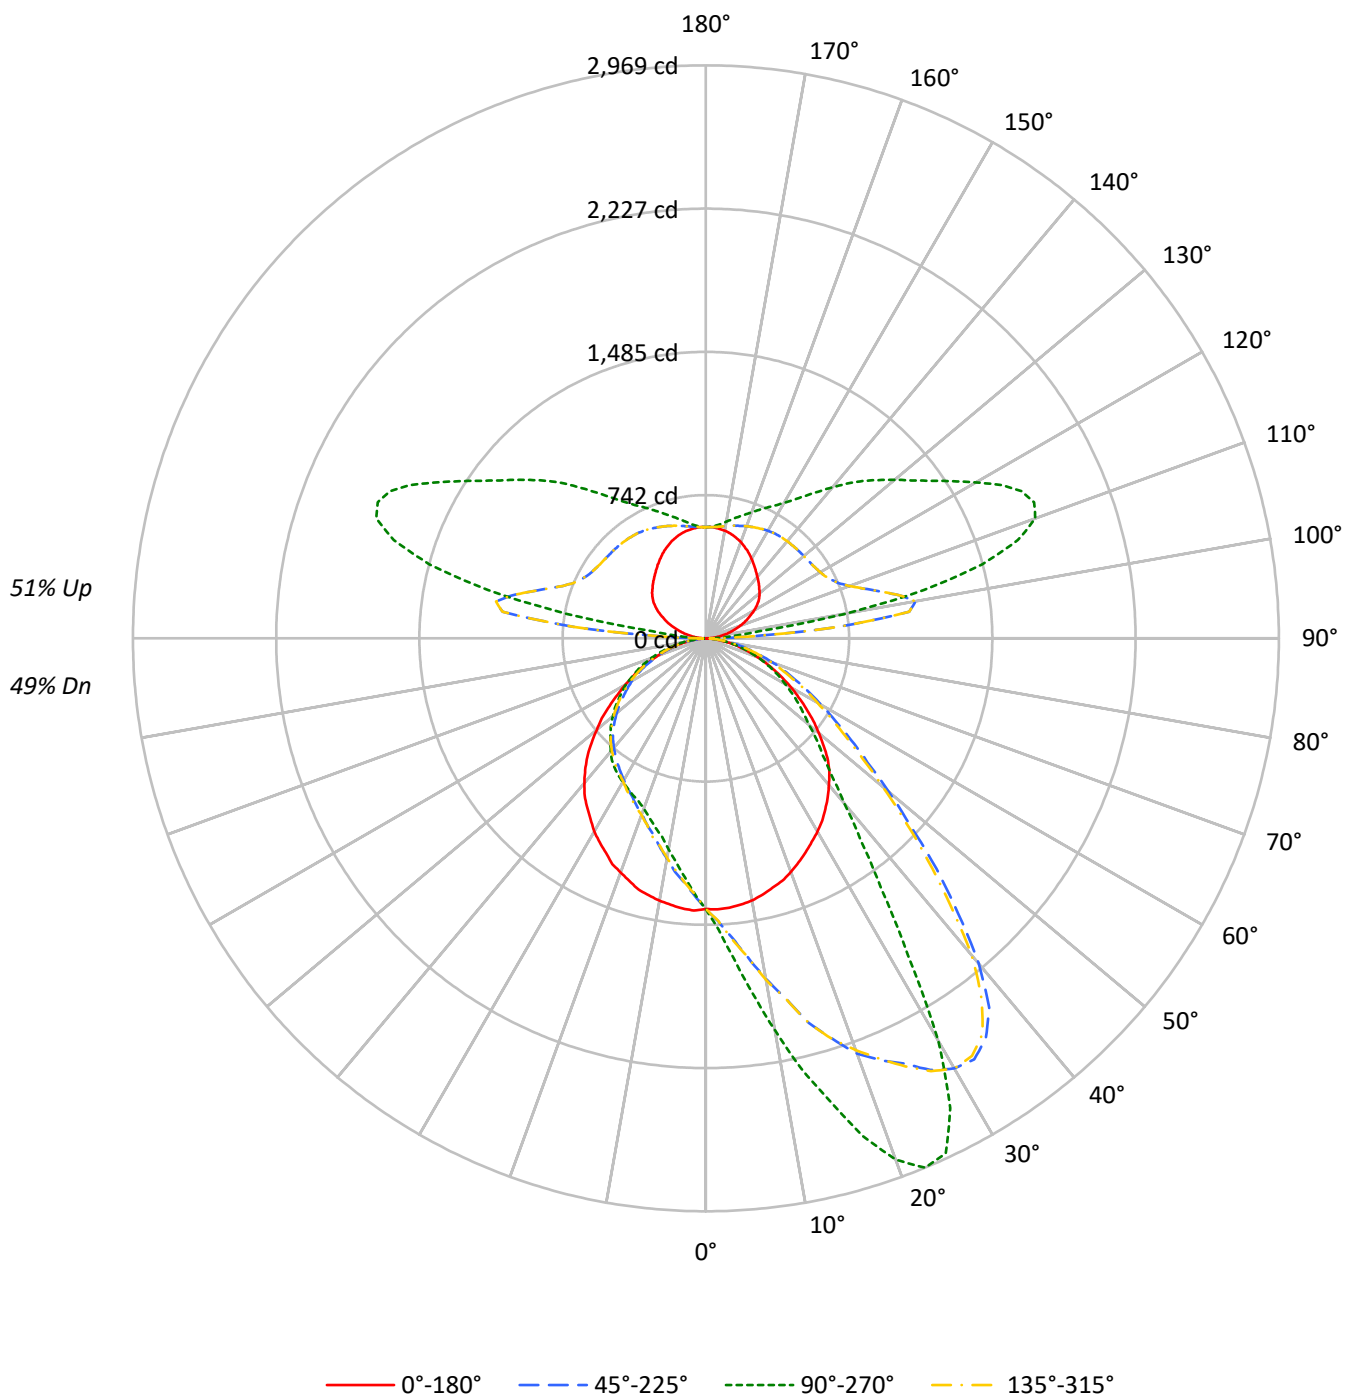

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| RF  | 20  |     |     |     | 20 |    |    |    |    | 20 |    |    |    |    | 20 |    |    |    |    | 20 |
| RC  | 80  |     |     |     | 70 |    |    |    |    | 50 |    |    |    |    | 30 |    |    |    |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0   | 107 | 107 | 107 | 107 | 99 | 99 | 99 | 99 | 83 | 83 | 83 | 69 | 69 | 69 | 56 | 56 | 56 | 49 |    |    |
| 1   | 98  | 94  | 90  | 87  | 90 | 87 | 83 | 80 | 73 | 71 | 69 | 61 | 59 | 58 | 50 | 49 | 48 | 42 |    |    |
| 2   | 89  | 82  | 76  | 71  | 82 | 76 | 71 | 66 | 64 | 61 | 57 | 54 | 51 | 49 | 44 | 42 | 40 | 36 |    |    |
| 3   | 82  | 72  | 65  | 59  | 75 | 67 | 61 | 56 | 57 | 52 | 48 | 48 | 44 | 41 | 39 | 37 | 35 | 31 |    |    |
| 4   | 75  | 64  | 56  | 50  | 69 | 60 | 53 | 47 | 51 | 46 | 41 | 43 | 39 | 36 | 35 | 32 | 30 | 26 |    |    |
| 5   | 69  | 57  | 49  | 43  | 63 | 53 | 46 | 41 | 46 | 40 | 36 | 38 | 34 | 31 | 32 | 29 | 26 | 23 |    |    |
| 6   | 63  | 51  | 43  | 38  | 58 | 48 | 41 | 36 | 41 | 35 | 31 | 35 | 30 | 27 | 29 | 26 | 23 | 20 |    |    |
| 7   | 59  | 46  | 39  | 33  | 54 | 43 | 36 | 31 | 37 | 32 | 28 | 32 | 27 | 24 | 26 | 23 | 21 | 18 |    |    |
| 8   | 54  | 42  | 34  | 29  | 50 | 39 | 32 | 28 | 34 | 28 | 25 | 29 | 25 | 22 | 24 | 21 | 18 | 16 |    |    |
| 9   | 51  | 38  | 31  | 26  | 47 | 36 | 29 | 25 | 31 | 26 | 22 | 27 | 22 | 19 | 22 | 19 | 17 | 15 |    |    |
| 10  | 47  | 35  | 28  | 23  | 44 | 33 | 27 | 22 | 29 | 23 | 20 | 25 | 20 | 17 | 21 | 17 | 15 | 13 |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°    | 90°   | 180°  | 270°  |
|-----|-------|-------|-------|-------|
| 0°  | 15093 | 15093 | 15093 | 15093 |
| 5°  | 15103 | 17390 | 15147 | 12979 |
| 10° | 15007 | 21044 | 15022 | 11334 |
| 15° | 14800 | 24957 | 14919 | 10202 |
| 20° | 14621 | 28734 | 14652 | 9388  |
| 25° | 14355 | 29457 | 14387 | 8963  |
| 30° | 14167 | 24337 | 14167 | 8685  |
| 35° | 13932 | 16277 | 13844 | 8438  |
| 40° | 13651 | 11750 | 13482 | 8062  |
| 45° | 13298 | 9307  | 12915 | 7594  |
| 50° | 12438 | 7904  | 11998 | 7134  |
| 55° | 11497 | 6945  | 11029 | 6620  |
| 60° | 10542 | 6047  | 9981  | 6083  |
| 65° | 9493  | 5178  | 9031  | 5365  |
| 70° | 8402  | 4299  | 7842  | 4522  |
| 75° | 7186  | 3242  | 6718  | 3490  |
| 80° | 5679  | 2164  | 5239  | 2293  |
| 85° | 3919  | 993   | 3131  | 904   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 24341 cd/sqm

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 137.9  | 1.6       |
| 10°-20°   | 442.9  | 5.2       |
| 20°-30°   | 745.3  | 8.7       |
| 30°-40°   | 842.2  | 9.8       |
| 40°-50°   | 754.3  | 8.8       |
| 50°-60°   | 608.9  | 7.1       |
| 60°-70°   | 424.3  | 5.0       |
| 70°-80°   | 222.7  | 2.6       |
| 80°-90°   | 56.6   | 0.7       |
| 90°-100°  | 312.6  | 3.6       |
| 100°-110° | 915.1  | 10.7      |
| 110°-120° | 893.6  | 10.4      |
| 120°-130° | 711.7  | 8.3       |
| 130°-140° | 561.5  | 6.6       |
| 140°-150° | 418.9  | 4.9       |
| 150°-160° | 292.1  | 3.4       |
| 160°-170° | 171.6  | 2.0       |
| 170°-180° | 55.8   | 0.7       |
| 0°-30°    | 1326.1 | 15.5      |
| 0°-40°    | 2168.3 | 25.3      |
| 0°-60°    | 3531.6 | 41.2      |
| 0°-90°    | 4235.2 | 49.4      |
| 90°-120°  | 2121.3 | 24.8      |
| 90°-150°  | 3813.4 | 44.5      |
| 90°-180°  | 4333.0 | 50.6      |
| 0°-180°   | 8568.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°   | 90°  | 180° | 270° | 360° | Flux |
|------|------|------|------|------|------|------|
| 0°   | 1402 | 1402 | 1402 | 1402 | 1402 |      |
| 5°   | 1401 | 1666 | 1405 | 1243 | 1401 | 133  |
| 15°  | 1337 | 2480 | 1348 | 1014 | 1337 | 378  |
| 25°  | 1223 | 2943 | 1226 | 895  | 1223 | 564  |
| 35°  | 1079 | 1586 | 1072 | 822  | 1079 | 675  |
| 45°  | 895  | 856  | 870  | 698  | 895  | 685  |
| 55°  | 634  | 582  | 609  | 554  | 634  | 568  |
| 65°  | 393  | 378  | 374  | 391  | 393  | 391  |
| 75°  | 189  | 194  | 177  | 209  | 189  | 203  |
| 85°  | 41   | 45   | 33   | 41   | 41   | 47   |
| 90°  | 2    | 34   | 2    | 34   | 2    | 6    |
| 95°  | 40   | 135  | 40   | 135  | 40   | 42   |
| 105° | 135  | 1483 | 135  | 1483 | 135  | 144  |
| 115° | 239  | 1804 | 239  | 1804 | 239  | 237  |
| 125° | 332  | 1422 | 332  | 1422 | 332  | 295  |
| 135° | 389  | 1153 | 389  | 1153 | 389  | 301  |
| 145° | 444  | 901  | 444  | 901  | 444  | 278  |
| 155° | 505  | 747  | 505  | 747  | 505  | 232  |
| 165° | 552  | 652  | 552  | 652  | 552  | 155  |
| 175° | 575  | 586  | 575  | 586  | 575  | 55   |
| 180° | 576  | 576  | 576  | 576  | 576  |      |



TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (FULL):**

|        | 0°     | 5°     | 10°    | 15°    | 20°    | 22.5°  | 25°    | 30°    | 35°    | 40°    | 45°    |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 |
| 2.5°   | 1406.3 | 1417.1 | 1422.6 | 1430.7 | 1438.9 | 1451.1 | 1455.2 | 1462.0 | 1459.2 | 1464.7 | 1467.4 |
| 5°     | 1400.8 | 1419.8 | 1436.1 | 1456.5 | 1475.5 | 1489.1 | 1502.7 | 1524.5 | 1540.8 | 1543.5 | 1555.7 |
| 7.5°   | 1391.3 | 1418.5 | 1447.0 | 1475.5 | 1512.2 | 1534.0 | 1558.4 | 1588.3 | 1612.8 | 1652.2 | 1667.1 |
| 10°    | 1379.1 | 1417.1 | 1457.9 | 1497.3 | 1547.6 | 1581.5 | 1611.4 | 1661.7 | 1712.0 | 1752.7 | 1790.8 |
| 12.5°  | 1360.1 | 1407.6 | 1460.6 | 1519.0 | 1584.2 | 1623.6 | 1664.4 | 1731.0 | 1807.1 | 1869.6 | 1910.3 |
| 15°    | 1337.0 | 1396.7 | 1464.7 | 1527.2 | 1599.2 | 1672.6 | 1716.0 | 1790.8 | 1899.5 | 1957.9 | 2062.5 |
| 17.5°  | 1317.9 | 1379.1 | 1447.0 | 1544.8 | 1642.7 | 1716.0 | 1747.3 | 1884.5 | 1959.2 | 2057.1 | 2175.3 |
| 20°    | 1288.0 | 1365.5 | 1452.5 | 1550.3 | 1676.6 | 1721.5 | 1785.3 | 1923.9 | 2016.3 | 2144.0 | 2289.4 |
| 22.5°  | 1256.8 | 1339.7 | 1444.3 | 1546.2 | 1687.5 | 1735.1 | 1822.0 | 1932.1 | 2078.8 | 2205.2 | 2365.5 |
| 25°    | 1222.8 | 1312.5 | 1418.5 | 1539.4 | 1678.0 | 1747.3 | 1828.8 | 1964.7 | 2123.6 | 2282.6 | 2430.7 |
| 27.5°  | 1188.9 | 1286.7 | 1396.7 | 1517.7 | 1652.2 | 1733.7 | 1815.2 | 1956.5 | 2160.3 | 2332.9 | 2521.7 |
| 30°    | 1156.3 | 1254.1 | 1364.1 | 1487.8 | 1629.1 | 1707.9 | 1785.3 | 1962.0 | 2188.9 | 2383.2 | 2573.4 |
| 32.5°  | 1120.9 | 1221.5 | 1337.0 | 1440.2 | 1582.9 | 1667.1 | 1754.1 | 1962.0 | 2206.5 | 2413.1 | 2587.0 |
| 35°    | 1078.8 | 1182.1 | 1281.3 | 1384.5 | 1525.8 | 1619.6 | 1717.4 | 1948.4 | 2222.8 | 2422.6 | 2529.9 |
| 37.5°  | 1038.0 | 1129.1 | 1214.7 | 1315.2 | 1463.3 | 1563.9 | 1676.6 | 1932.1 | 2214.7 | 2381.8 | 2411.7 |
| 40°    | 991.9  | 1082.9 | 1152.2 | 1245.9 | 1402.2 | 1519.0 | 1633.2 | 1910.3 | 2179.4 | 2285.3 | 2198.4 |
| 42.5°  | 947.0  | 1019.0 | 1078.8 | 1169.8 | 1339.7 | 1453.8 | 1577.5 | 1870.9 | 2110.1 | 2131.8 | 1936.1 |
| 45°    | 895.4  | 947.0  | 1000.0 | 1103.3 | 1271.7 | 1388.6 | 1525.8 | 1813.9 | 1998.6 | 1936.1 | 1688.9 |
| 47.5°  | 828.8  | 875.0  | 933.4  | 1028.5 | 1199.7 | 1320.7 | 1451.1 | 1740.5 | 1837.0 | 1706.5 | 1436.1 |
| 50°    | 764.9  | 804.4  | 858.7  | 951.1  | 1123.6 | 1241.9 | 1380.4 | 1625.0 | 1672.6 | 1467.4 | 1237.8 |
| 52.5°  | 701.1  | 731.0  | 784.0  | 876.4  | 1048.9 | 1163.0 | 1289.4 | 1506.8 | 1479.6 | 1259.5 | 1055.7 |
| 55°    | 634.5  | 660.3  | 710.6  | 801.6  | 962.0  | 1070.7 | 1191.6 | 1361.4 | 1290.8 | 1081.5 | 918.5  |
| 57.5°  | 569.3  | 596.5  | 648.1  | 724.2  | 875.0  | 981.0  | 1077.4 | 1210.6 | 1104.6 | 937.5  | 793.5  |
| 60°    | 510.9  | 534.0  | 573.4  | 648.1  | 785.3  | 870.9  | 959.2  | 1050.3 | 962.0  | 800.3  | 690.2  |
| 62.5°  | 449.7  | 471.5  | 508.2  | 576.1  | 694.3  | 770.4  | 841.0  | 915.8  | 817.9  | 699.7  | 601.9  |
| 65°    | 392.7  | 410.3  | 444.3  | 506.8  | 603.3  | 665.8  | 722.8  | 774.5  | 695.7  | 587.0  | 513.6  |
| 67.5°  | 341.0  | 356.0  | 384.5  | 440.2  | 521.7  | 566.6  | 612.8  | 656.3  | 589.7  | 502.7  | 440.2  |
| 70°    | 285.3  | 297.6  | 323.4  | 364.1  | 429.3  | 475.5  | 509.5  | 542.1  | 482.3  | 413.0  | 370.9  |
| 72.5°  | 236.4  | 248.6  | 264.9  | 307.1  | 351.9  | 380.4  | 417.1  | 434.8  | 400.8  | 343.8  | 301.6  |
| 75°    | 188.9  | 198.4  | 213.3  | 240.5  | 282.6  | 301.6  | 324.7  | 338.3  | 307.1  | 269.0  | 243.2  |
| 77.5°  | 148.1  | 152.2  | 163.0  | 182.1  | 210.6  | 232.3  | 250.0  | 258.2  | 236.4  | 212.0  | 190.2  |
| 80°    | 104.6  | 110.1  | 118.2  | 134.5  | 156.3  | 163.0  | 173.9  | 183.4  | 169.8  | 148.1  | 134.5  |
| 82.5°  | 69.3   | 76.1   | 80.2   | 87.0   | 100.5  | 108.7  | 111.4  | 119.6  | 107.3  | 99.2   | 93.8   |
| 85°    | 40.8   | 43.5   | 44.8   | 48.9   | 55.7   | 59.8   | 63.9   | 65.2   | 62.5   | 61.1   | 55.7   |
| 87.5°  | 20.4   | 20.4   | 20.4   | 23.1   | 24.5   | 27.2   | 28.5   | 28.5   | 28.5   | 27.2   | 25.8   |
| 90°    | 2.3    | 4.7    | 7.0    | 10.5   | 12.8   | 14.0   | 15.2   | 18.7   | 22.2   | 25.7   | 29.2   |
| 92.5°  | 17.5   | 25.7   | 37.3   | 47.8   | 59.5   | 70.0   | 80.5   | 117.8  | 179.6  | 240.2  | 216.9  |
| 95°    | 39.6   | 43.1   | 56.0   | 75.8   | 106.1  | 128.8  | 151.6  | 250.7  | 424.4  | 615.7  | 691.4  |
| 97.5°  | 63.0   | 64.1   | 74.6   | 92.1   | 122.4  | 147.5  | 172.6  | 270.5  | 472.2  | 794.1  | 1063.4 |
| 100°   | 86.3   | 87.5   | 95.6   | 111.9  | 139.9  | 162.6  | 185.4  | 267.0  | 439.6  | 746.2  | 1104.2 |
| 102.5° | 110.8  | 113.1  | 120.1  | 135.3  | 159.7  | 180.1  | 200.6  | 271.7  | 411.6  | 676.3  | 1028.4 |
| 105°   | 135.3  | 138.8  | 145.8  | 159.7  | 181.9  | 200.0  | 218.0  | 281.0  | 401.1  | 621.5  | 937.5  |
| 107.5° | 160.9  | 164.4  | 171.4  | 185.4  | 206.4  | 223.3  | 240.2  | 296.2  | 398.8  | 581.8  | 857.0  |
| 110°   | 188.9  | 192.4  | 198.2  | 211.0  | 230.9  | 247.2  | 263.5  | 316.0  | 404.6  | 560.9  | 790.6  |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 0°    | 5°    | 10°   | 15°   | 20°   | 22.5° | 25°   | 30°   | 35°   | 40°   | 45°   |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 214.5 | 218.0 | 223.9 | 236.7 | 256.5 | 272.2 | 288.0 | 335.8 | 416.3 | 549.2 | 746.2 |
| 115°   | 239.0 | 243.7 | 250.7 | 262.4 | 282.2 | 298.0 | 313.7 | 358.0 | 429.1 | 548.0 | 717.1 |
| 117.5° | 263.5 | 269.3 | 275.2 | 285.7 | 307.8 | 322.4 | 337.0 | 381.3 | 445.4 | 549.2 | 697.3 |
| 120°   | 289.2 | 292.7 | 298.5 | 310.2 | 332.3 | 346.9 | 361.5 | 403.4 | 464.1 | 553.9 | 684.4 |
| 122.5° | 311.3 | 314.8 | 320.7 | 333.5 | 354.5 | 370.2 | 386.0 | 426.8 | 481.6 | 562.0 | 676.3 |
| 125°   | 332.3 | 334.6 | 341.6 | 354.5 | 376.6 | 392.4 | 408.1 | 448.9 | 500.2 | 570.2 | 669.3 |
| 127.5° | 348.6 | 352.1 | 360.3 | 373.1 | 397.6 | 413.4 | 429.1 | 468.7 | 515.4 | 579.5 | 665.8 |
| 130°   | 363.8 | 367.3 | 377.8 | 391.8 | 416.3 | 432.0 | 447.7 | 486.2 | 530.5 | 588.8 | 662.3 |
| 132.5° | 375.5 | 380.1 | 391.8 | 409.3 | 433.8 | 449.0 | 464.1 | 501.4 | 544.5 | 595.8 | 661.1 |
| 135°   | 389.4 | 394.1 | 406.9 | 424.4 | 448.9 | 464.6 | 480.4 | 516.5 | 556.2 | 602.8 | 660.0 |
| 137.5° | 402.3 | 406.9 | 419.8 | 438.4 | 462.9 | 477.5 | 492.1 | 527.0 | 565.5 | 607.5 | 657.6 |
| 140°   | 415.1 | 420.9 | 432.6 | 451.2 | 474.6 | 489.2 | 503.7 | 537.5 | 572.5 | 612.2 | 656.5 |
| 142.5° | 429.1 | 433.8 | 446.6 | 462.9 | 486.2 | 499.6 | 513.0 | 545.7 | 579.5 | 615.7 | 654.1 |
| 145°   | 444.3 | 447.7 | 458.2 | 475.7 | 495.6 | 509.0 | 522.4 | 552.7 | 584.2 | 616.8 | 651.8 |
| 147.5° | 459.4 | 461.7 | 472.2 | 487.4 | 507.2 | 518.8 | 530.5 | 558.5 | 587.7 | 616.8 | 648.3 |
| 150°   | 474.6 | 475.7 | 485.1 | 500.2 | 516.5 | 527.0 | 537.5 | 564.4 | 588.8 | 616.8 | 643.6 |
| 152.5° | 489.7 | 489.7 | 499.1 | 511.9 | 525.9 | 535.8 | 545.7 | 567.8 | 591.2 | 613.3 | 637.8 |
| 155°   | 504.9 | 504.9 | 511.9 | 523.5 | 536.4 | 544.6 | 552.7 | 572.5 | 591.2 | 611.0 | 630.8 |
| 157.5° | 516.5 | 517.7 | 523.5 | 534.0 | 545.7 | 552.1 | 558.5 | 574.8 | 592.3 | 607.5 | 625.0 |
| 160°   | 530.5 | 530.5 | 535.2 | 544.5 | 552.7 | 558.6 | 564.4 | 578.3 | 592.3 | 605.2 | 618.0 |
| 162.5° | 541.0 | 541.0 | 544.5 | 551.5 | 558.5 | 563.2 | 567.8 | 579.5 | 591.2 | 600.5 | 611.0 |
| 165°   | 551.5 | 550.4 | 552.7 | 558.5 | 563.2 | 567.2 | 571.3 | 580.7 | 588.8 | 595.8 | 604.0 |
| 167.5° | 559.7 | 558.5 | 559.7 | 564.4 | 567.8 | 570.8 | 573.7 | 580.7 | 587.7 | 591.2 | 597.0 |
| 170°   | 566.7 | 564.4 | 565.5 | 569.0 | 571.3 | 572.5 | 573.7 | 579.5 | 584.2 | 586.5 | 590.0 |
| 172.5° | 571.3 | 570.2 | 570.2 | 572.5 | 573.7 | 574.2 | 574.8 | 579.5 | 583.0 | 583.0 | 584.2 |
| 175°   | 574.8 | 573.7 | 572.5 | 574.8 | 574.8 | 575.4 | 576.0 | 578.3 | 580.7 | 579.5 | 579.5 |
| 177.5° | 577.2 | 576.0 | 574.8 | 576.0 | 576.0 | 576.0 | 576.0 | 577.2 | 579.5 | 577.2 | 576.0 |
| 180°   | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 50°    | 55°    | 60°    | 65°    | 67.5°  | 70°    | 75°    | 80°    | 85°    | 90°    | 95°    |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 |
| 2.5°   | 1476.9 | 1479.6 | 1489.1 | 1495.9 | 1509.5 | 1508.2 | 1508.2 | 1506.8 | 1502.7 | 1509.5 | 1513.6 |
| 5°     | 1580.2 | 1603.3 | 1606.0 | 1635.9 | 1637.2 | 1649.5 | 1657.6 | 1650.8 | 1667.1 | 1665.8 | 1653.5 |
| 7.5°   | 1707.9 | 1739.1 | 1754.1 | 1782.6 | 1815.2 | 1807.1 | 1838.3 | 1843.8 | 1841.0 | 1854.6 | 1864.1 |
| 10°    | 1847.8 | 1902.2 | 1940.2 | 1993.2 | 2006.8 | 2015.0 | 2035.3 | 2053.0 | 2088.3 | 2061.1 | 2078.8 |
| 12.5°  | 2008.2 | 2047.6 | 2097.8 | 2182.1 | 2224.2 | 2251.4 | 2260.9 | 2273.1 | 2297.6 | 2282.6 | 2284.0 |
| 15°    | 2142.7 | 2195.7 | 2281.3 | 2385.9 | 2398.1 | 2432.1 | 2423.9 | 2497.3 | 2532.6 | 2479.6 | 2509.5 |
| 17.5°  | 2282.6 | 2353.3 | 2455.2 | 2546.2 | 2597.8 | 2620.9 | 2642.7 | 2713.3 | 2710.6 | 2702.5 | 2709.2 |
| 20°    | 2372.3 | 2487.8 | 2614.1 | 2735.1 | 2750.0 | 2767.7 | 2826.1 | 2856.0 | 2850.6 | 2873.7 | 2888.6 |
| 22.5°  | 2498.6 | 2620.9 | 2755.4 | 2835.6 | 2869.6 | 2890.0 | 2936.2 | 2955.2 | 2963.3 | 2968.8 | 2959.2 |
| 25°    | 2604.6 | 2735.1 | 2834.2 | 2904.9 | 2925.3 | 2936.2 | 2951.1 | 2956.5 | 2952.5 | 2942.9 | 2951.1 |
| 27.5°  | 2676.6 | 2781.3 | 2849.2 | 2881.8 | 2870.9 | 2853.3 | 2824.7 | 2805.7 | 2763.6 | 2743.2 | 2767.7 |
| 30°    | 2706.5 | 2752.7 | 2773.1 | 2718.8 | 2664.4 | 2620.9 | 2566.6 | 2466.0 | 2387.2 | 2410.3 | 2379.1 |
| 32.5°  | 2659.0 | 2629.1 | 2531.3 | 2391.3 | 2349.2 | 2278.5 | 2125.0 | 2006.8 | 2010.9 | 1948.4 | 1974.2 |
| 35°    | 2519.0 | 2383.2 | 2198.4 | 1986.4 | 1930.7 | 1892.7 | 1724.2 | 1698.4 | 1644.0 | 1585.6 | 1601.9 |
| 37.5°  | 2271.7 | 2073.4 | 1849.2 | 1692.9 | 1610.1 | 1527.2 | 1432.1 | 1375.0 | 1342.4 | 1317.9 | 1337.0 |
| 40°    | 1970.1 | 1728.3 | 1543.5 | 1403.5 | 1332.9 | 1279.9 | 1214.7 | 1157.6 | 1120.9 | 1116.9 | 1123.6 |
| 42.5°  | 1673.9 | 1470.1 | 1300.3 | 1167.1 | 1144.0 | 1081.5 | 1039.4 | 994.6  | 983.7  | 966.0  | 975.5  |
| 45°    | 1417.1 | 1251.4 | 1111.4 | 1002.7 | 975.5  | 959.2  | 907.6  | 879.1  | 866.9  | 856.0  | 872.3  |
| 47.5°  | 1231.0 | 1057.1 | 955.2  | 889.9  | 862.8  | 835.6  | 807.1  | 788.0  | 778.5  | 779.9  | 778.5  |
| 50°    | 1051.6 | 923.9  | 834.2  | 784.0  | 767.7  | 748.6  | 725.5  | 713.3  | 709.2  | 697.0  | 706.5  |
| 52.5°  | 904.9  | 812.5  | 750.0  | 702.4  | 690.2  | 676.6  | 657.6  | 650.8  | 641.3  | 638.6  | 638.6  |
| 55°    | 786.7  | 714.7  | 664.4  | 633.2  | 618.2  | 607.3  | 596.5  | 588.3  | 581.5  | 581.5  | 581.5  |
| 57.5°  | 694.3  | 631.8  | 595.1  | 567.9  | 562.5  | 551.6  | 539.4  | 539.4  | 529.9  | 528.5  | 532.6  |
| 60°    | 615.5  | 559.8  | 531.3  | 508.2  | 500.0  | 497.3  | 485.1  | 485.1  | 482.3  | 475.5  | 481.0  |
| 62.5°  | 535.3  | 494.6  | 470.1  | 452.4  | 444.3  | 444.3  | 434.8  | 428.0  | 428.0  | 429.3  | 426.6  |
| 65°    | 462.0  | 432.1  | 410.3  | 396.7  | 392.7  | 387.2  | 385.9  | 380.4  | 376.4  | 377.7  | 376.4  |
| 67.5°  | 396.7  | 373.6  | 358.7  | 347.8  | 341.0  | 338.3  | 334.2  | 334.2  | 331.5  | 332.9  | 326.1  |
| 70°    | 338.3  | 315.2  | 303.0  | 292.1  | 289.4  | 289.4  | 284.0  | 285.3  | 282.6  | 286.7  | 284.0  |
| 72.5°  | 278.5  | 260.9  | 251.4  | 247.3  | 244.6  | 243.2  | 240.5  | 237.8  | 236.4  | 239.1  | 237.8  |
| 75°    | 225.5  | 210.6  | 203.8  | 201.1  | 198.4  | 198.4  | 197.0  | 195.7  | 194.3  | 194.3  | 194.3  |
| 77.5°  | 175.3  | 165.8  | 157.6  | 160.3  | 156.3  | 157.6  | 153.5  | 153.5  | 154.9  | 153.5  | 153.5  |
| 80°    | 129.1  | 122.3  | 122.3  | 119.6  | 114.1  | 116.8  | 116.8  | 112.8  | 111.4  | 114.1  | 110.1  |
| 82.5°  | 85.6   | 84.2   | 81.5   | 80.2   | 77.4   | 78.8   | 77.4   | 76.1   | 74.7   | 77.4   | 74.7   |
| 85°    | 50.3   | 50.3   | 48.9   | 46.2   | 48.9   | 47.6   | 46.2   | 46.2   | 44.8   | 44.8   | 44.8   |
| 87.5°  | 25.8   | 23.1   | 23.1   | 21.7   | 23.1   | 20.4   | 21.7   | 20.4   | 19.0   | 20.4   | 19.0   |
| 90°    | 28.0   | 29.2   | 30.3   | 31.5   | 32.6   | 33.8   | 32.6   | 33.8   | 35.0   | 33.8   | 35.0   |
| 92.5°  | 162.1  | 115.4  | 89.8   | 78.1   | 74.0   | 70.0   | 67.6   | 63.0   | 64.1   | 61.8   | 64.1   |
| 95°    | 560.9  | 419.8  | 284.5  | 222.7  | 201.7  | 180.7  | 158.6  | 148.1  | 139.9  | 135.3  | 139.9  |
| 97.5°  | 1099.6 | 964.3  | 727.6  | 573.7  | 507.2  | 440.8  | 362.6  | 318.3  | 290.3  | 277.5  | 290.3  |
| 100°   | 1333.9 | 1374.7 | 1280.3 | 1143.9 | 1061.1 | 978.3  | 860.5  | 775.4  | 729.9  | 731.1  | 729.9  |
| 102.5° | 1345.6 | 1511.2 | 1531.0 | 1465.7 | 1420.8 | 1375.9 | 1290.8 | 1227.8 | 1191.7 | 1157.9 | 1191.7 |
| 105°   | 1272.1 | 1515.8 | 1632.4 | 1654.6 | 1639.4 | 1624.3 | 1570.6 | 1526.3 | 1489.0 | 1483.2 | 1489.0 |
| 107.5° | 1167.2 | 1445.9 | 1628.9 | 1719.9 | 1735.6 | 1751.4 | 1744.4 | 1723.4 | 1708.2 | 1695.4 | 1708.2 |
| 110°   | 1069.2 | 1336.3 | 1550.8 | 1697.7 | 1738.5 | 1779.3 | 1812.0 | 1821.3 | 1819.0 | 1816.6 | 1819.0 |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 50°   | 55°    | 60°    | 65°    | 67.5°  | 70°    | 75°    | 80°    | 85°    | 90°    | 95°    |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 984.1 | 1227.8 | 1448.2 | 1617.3 | 1672.6 | 1728.0 | 1794.5 | 1828.3 | 1840.0 | 1841.1 | 1840.0 |
| 115°   | 918.8 | 1134.5 | 1337.4 | 1508.8 | 1572.4 | 1635.9 | 1723.4 | 1774.7 | 1798.0 | 1803.8 | 1798.0 |
| 117.5° | 875.7 | 1062.2 | 1241.8 | 1399.2 | 1465.1 | 1531.0 | 1621.9 | 1679.1 | 1714.0 | 1722.2 | 1714.0 |
| 120°   | 843.0 | 1007.4 | 1164.8 | 1304.8 | 1363.6 | 1422.5 | 1514.7 | 1579.9 | 1607.9 | 1614.9 | 1607.9 |
| 122.5° | 816.2 | 964.3  | 1103.0 | 1230.1 | 1283.8 | 1337.4 | 1416.7 | 1473.8 | 1505.3 | 1514.7 | 1505.3 |
| 125°   | 794.1 | 927.0  | 1054.1 | 1166.0 | 1212.6 | 1259.3 | 1333.9 | 1385.2 | 1414.4 | 1422.5 | 1414.4 |
| 127.5° | 773.1 | 893.2  | 1008.6 | 1111.2 | 1154.4 | 1197.5 | 1265.1 | 1309.4 | 1336.3 | 1343.2 | 1336.3 |
| 130°   | 756.7 | 861.7  | 966.6  | 1061.1 | 1100.8 | 1140.4 | 1202.2 | 1244.1 | 1268.6 | 1278.0 | 1268.6 |
| 132.5° | 741.6 | 832.5  | 927.0  | 1013.3 | 1050.6 | 1087.9 | 1145.0 | 1187.0 | 1208.0 | 1213.8 | 1208.0 |
| 135°   | 728.8 | 806.9  | 889.7  | 965.5  | 998.7  | 1031.9 | 1089.1 | 1124.0 | 1145.0 | 1153.2 | 1145.0 |
| 137.5° | 717.1 | 782.4  | 852.4  | 920.0  | 949.8  | 979.5  | 1028.4 | 1064.6 | 1082.1 | 1089.1 | 1082.1 |
| 140°   | 706.6 | 761.4  | 820.9  | 876.8  | 901.9  | 927.0  | 971.3  | 1003.9 | 1022.6 | 1021.4 | 1022.6 |
| 142.5° | 697.3 | 741.6  | 790.6  | 837.2  | 858.2  | 879.2  | 915.3  | 943.3  | 959.6  | 958.5  | 959.6  |
| 145°   | 689.1 | 726.4  | 764.9  | 802.2  | 819.1  | 836.0  | 865.2  | 889.7  | 899.0  | 901.3  | 899.0  |
| 147.5° | 681.0 | 713.6  | 745.1  | 776.6  | 788.8  | 801.1  | 824.4  | 841.9  | 851.2  | 852.4  | 851.2  |
| 150°   | 672.8 | 699.6  | 726.4  | 750.9  | 762.0  | 773.1  | 790.6  | 803.4  | 810.4  | 810.4  | 810.4  |
| 152.5° | 663.5 | 686.8  | 708.9  | 729.9  | 738.6  | 747.4  | 760.2  | 771.9  | 775.4  | 775.4  | 775.4  |
| 155°   | 654.1 | 674.0  | 692.6  | 710.1  | 717.1  | 724.1  | 734.6  | 743.9  | 746.2  | 747.4  | 746.2  |
| 157.5° | 643.6 | 660.0  | 676.3  | 690.3  | 696.1  | 701.9  | 711.3  | 718.3  | 720.6  | 720.6  | 720.6  |
| 160°   | 633.1 | 648.3  | 661.1  | 672.8  | 676.9  | 681.0  | 689.1  | 696.1  | 696.1  | 694.9  | 696.1  |
| 162.5° | 622.7 | 634.3  | 644.8  | 655.3  | 658.8  | 662.3  | 667.0  | 672.8  | 672.8  | 671.6  | 672.8  |
| 165°   | 613.3 | 622.7  | 629.6  | 637.8  | 640.7  | 643.6  | 648.3  | 653.0  | 651.8  | 651.8  | 651.8  |
| 167.5° | 604.0 | 612.2  | 618.0  | 622.7  | 625.0  | 627.3  | 629.6  | 633.1  | 632.0  | 632.0  | 632.0  |
| 170°   | 595.8 | 601.7  | 605.2  | 609.8  | 611.0  | 612.2  | 613.3  | 615.7  | 614.5  | 614.5  | 614.5  |
| 172.5° | 587.7 | 592.3  | 594.7  | 598.2  | 598.8  | 599.3  | 599.3  | 601.7  | 599.3  | 598.2  | 599.3  |
| 175°   | 581.8 | 584.2  | 585.3  | 587.7  | 587.7  | 587.7  | 587.7  | 588.8  | 587.7  | 586.5  | 587.7  |
| 177.5° | 577.2 | 578.3  | 579.5  | 580.7  | 580.7  | 580.7  | 579.5  | 580.7  | 578.3  | 578.3  | 578.3  |
| 180°   | 576.0 | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 100°   | 105°   | 110°   | 112.5° | 115°   | 120°   | 125°   | 130°   | 135°   | 140°   | 145°   |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 |
| 2.5°   | 1502.7 | 1506.8 | 1495.9 | 1493.2 | 1493.2 | 1498.6 | 1494.6 | 1457.9 | 1464.7 | 1456.5 | 1453.8 |
| 5°     | 1668.5 | 1660.3 | 1649.5 | 1644.0 | 1637.2 | 1618.2 | 1616.9 | 1574.7 | 1566.6 | 1539.4 | 1527.2 |
| 7.5°   | 1850.5 | 1843.8 | 1811.1 | 1807.1 | 1804.4 | 1786.7 | 1741.9 | 1697.0 | 1664.4 | 1633.2 | 1603.3 |
| 10°    | 2058.4 | 2038.1 | 2023.1 | 1993.2 | 1978.3 | 1953.8 | 1895.4 | 1853.3 | 1797.6 | 1750.0 | 1687.5 |
| 12.5°  | 2308.4 | 2285.3 | 2235.1 | 2213.3 | 2194.3 | 2126.4 | 2067.9 | 2020.4 | 1911.7 | 1879.1 | 1801.6 |
| 15°    | 2491.9 | 2442.9 | 2437.5 | 2390.0 | 2387.2 | 2312.5 | 2201.1 | 2149.5 | 2065.2 | 1945.7 | 1865.5 |
| 17.5°  | 2690.2 | 2646.7 | 2612.8 | 2555.7 | 2547.6 | 2476.9 | 2395.4 | 2269.0 | 2176.6 | 2062.5 | 1960.6 |
| 20°    | 2835.6 | 2812.5 | 2754.1 | 2731.0 | 2683.4 | 2623.6 | 2539.4 | 2383.2 | 2270.4 | 2156.3 | 2031.3 |
| 22.5°  | 2951.1 | 2928.0 | 2881.8 | 2850.6 | 2823.4 | 2745.9 | 2645.4 | 2512.2 | 2357.3 | 2207.9 | 2078.8 |
| 25°    | 2949.7 | 2942.9 | 2923.9 | 2909.0 | 2888.6 | 2831.5 | 2747.3 | 2619.6 | 2447.0 | 2282.6 | 2103.3 |
| 27.5°  | 2782.6 | 2801.6 | 2834.2 | 2850.6 | 2846.5 | 2838.3 | 2790.8 | 2683.4 | 2528.5 | 2332.9 | 2131.8 |
| 30°    | 2434.8 | 2504.1 | 2565.2 | 2646.7 | 2671.2 | 2731.0 | 2758.2 | 2697.0 | 2573.4 | 2391.3 | 2168.5 |
| 32.5°  | 2019.0 | 2119.6 | 2252.7 | 2297.6 | 2375.0 | 2490.5 | 2619.6 | 2642.7 | 2565.2 | 2425.3 | 2191.6 |
| 35°    | 1656.3 | 1739.1 | 1842.4 | 1913.0 | 1982.3 | 2169.8 | 2332.9 | 2474.2 | 2500.0 | 2407.6 | 2186.1 |
| 37.5°  | 1370.9 | 1429.4 | 1520.4 | 1580.2 | 1644.0 | 1804.4 | 2032.6 | 2216.0 | 2345.1 | 2347.8 | 2171.2 |
| 40°    | 1164.4 | 1190.2 | 1269.0 | 1312.5 | 1373.6 | 1512.2 | 1716.0 | 1955.2 | 2144.0 | 2231.0 | 2131.8 |
| 42.5°  | 986.4  | 1020.4 | 1085.6 | 1118.2 | 1157.6 | 1278.5 | 1413.0 | 1640.0 | 1873.6 | 2059.8 | 2058.4 |
| 45°    | 880.4  | 904.9  | 934.8  | 962.0  | 1006.8 | 1078.8 | 1232.3 | 1402.2 | 1626.4 | 1837.0 | 1919.8 |
| 47.5°  | 786.7  | 809.8  | 839.7  | 847.8  | 877.7  | 945.7  | 1039.4 | 1187.5 | 1396.7 | 1606.0 | 1762.2 |
| 50°    | 707.9  | 726.9  | 747.3  | 762.2  | 775.8  | 831.5  | 902.2  | 1027.2 | 1194.3 | 1396.7 | 1591.0 |
| 52.5°  | 646.7  | 660.3  | 678.0  | 686.1  | 698.4  | 739.1  | 793.5  | 885.9  | 1023.1 | 1207.9 | 1396.7 |
| 55°    | 589.7  | 599.2  | 610.1  | 623.6  | 629.1  | 659.0  | 701.1  | 779.9  | 881.8  | 1047.6 | 1226.9 |
| 57.5°  | 536.7  | 540.8  | 547.6  | 555.7  | 562.5  | 588.3  | 625.0  | 678.0  | 767.7  | 895.4  | 1065.2 |
| 60°    | 476.9  | 487.8  | 491.8  | 500.0  | 504.1  | 524.5  | 553.0  | 597.8  | 667.1  | 777.2  | 904.9  |
| 62.5°  | 426.6  | 433.4  | 440.2  | 444.3  | 453.8  | 460.6  | 483.7  | 524.5  | 581.5  | 663.0  | 778.5  |
| 65°    | 381.8  | 384.5  | 388.6  | 392.7  | 395.4  | 403.5  | 425.3  | 452.4  | 495.9  | 567.9  | 657.6  |
| 67.5°  | 330.2  | 332.9  | 338.3  | 339.7  | 342.4  | 353.3  | 365.5  | 388.6  | 425.3  | 479.6  | 553.0  |
| 70°    | 279.9  | 284.0  | 286.7  | 289.4  | 293.5  | 297.6  | 311.1  | 330.2  | 358.7  | 396.7  | 453.8  |
| 72.5°  | 236.4  | 240.5  | 240.5  | 243.2  | 241.8  | 247.3  | 260.9  | 274.5  | 293.5  | 324.7  | 375.0  |
| 75°    | 192.9  | 192.9  | 195.7  | 197.0  | 198.4  | 203.8  | 209.2  | 220.1  | 235.1  | 259.5  | 290.8  |
| 77.5°  | 152.2  | 150.8  | 153.5  | 153.5  | 153.5  | 157.6  | 163.0  | 168.5  | 178.0  | 195.7  | 220.1  |
| 80°    | 111.4  | 111.4  | 114.1  | 115.5  | 112.8  | 114.1  | 116.8  | 122.3  | 129.1  | 141.3  | 154.9  |
| 82.5°  | 73.4   | 78.8   | 77.4   | 78.8   | 77.4   | 80.2   | 81.5   | 82.9   | 85.6   | 91.0   | 100.5  |
| 85°    | 44.8   | 44.8   | 44.8   | 46.2   | 44.8   | 46.2   | 46.2   | 46.2   | 47.6   | 50.3   | 54.3   |
| 87.5°  | 19.0   | 19.0   | 19.0   | 20.4   | 19.0   | 19.0   | 20.4   | 19.0   | 20.4   | 20.4   | 21.7   |
| 90°    | 33.8   | 32.6   | 33.8   | 32.6   | 31.5   | 30.3   | 29.2   | 28.0   | 29.2   | 25.7   | 22.2   |
| 92.5°  | 63.0   | 67.6   | 70.0   | 74.0   | 78.1   | 89.8   | 115.4  | 162.1  | 216.9  | 240.2  | 179.6  |
| 95°    | 148.1  | 158.6  | 180.7  | 201.7  | 222.7  | 284.5  | 419.8  | 560.9  | 691.4  | 615.7  | 424.4  |
| 97.5°  | 318.3  | 362.6  | 440.8  | 507.2  | 573.7  | 727.6  | 964.3  | 1099.6 | 1063.4 | 794.1  | 472.2  |
| 100°   | 775.4  | 860.5  | 978.3  | 1061.1 | 1143.9 | 1280.3 | 1374.7 | 1333.9 | 1104.2 | 746.2  | 439.6  |
| 102.5° | 1227.8 | 1290.8 | 1375.9 | 1420.8 | 1465.7 | 1531.0 | 1511.2 | 1345.6 | 1028.4 | 676.3  | 411.6  |
| 105°   | 1526.3 | 1570.6 | 1624.3 | 1639.4 | 1654.6 | 1632.4 | 1515.8 | 1272.1 | 937.5  | 621.5  | 401.1  |
| 107.5° | 1723.4 | 1744.4 | 1751.4 | 1735.6 | 1719.9 | 1628.9 | 1445.9 | 1167.2 | 857.0  | 581.8  | 398.8  |
| 110°   | 1821.3 | 1812.0 | 1779.3 | 1738.5 | 1697.7 | 1550.8 | 1336.3 | 1069.2 | 790.6  | 560.9  | 404.6  |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 100°   | 105°   | 110°   | 112.5° | 115°   | 120°   | 125°   | 130°  | 135°  | 140°  | 145°  |
|--------|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|
| 112.5° | 1828.3 | 1794.5 | 1728.0 | 1672.6 | 1617.3 | 1448.2 | 1227.8 | 984.1 | 746.2 | 549.2 | 416.3 |
| 115°   | 1774.7 | 1723.4 | 1635.9 | 1572.4 | 1508.8 | 1337.4 | 1134.5 | 918.8 | 717.1 | 548.0 | 429.1 |
| 117.5° | 1679.1 | 1621.9 | 1531.0 | 1465.1 | 1399.2 | 1241.8 | 1062.2 | 875.7 | 697.3 | 549.2 | 445.4 |
| 120°   | 1579.9 | 1514.7 | 1422.5 | 1363.6 | 1304.8 | 1164.8 | 1007.4 | 843.0 | 684.4 | 553.9 | 464.1 |
| 122.5° | 1473.8 | 1416.7 | 1337.4 | 1283.8 | 1230.1 | 1103.0 | 964.3  | 816.2 | 676.3 | 562.0 | 481.6 |
| 125°   | 1385.2 | 1333.9 | 1259.3 | 1212.6 | 1166.0 | 1054.1 | 927.0  | 794.1 | 669.3 | 570.2 | 500.2 |
| 127.5° | 1309.4 | 1265.1 | 1197.5 | 1154.4 | 1111.2 | 1008.6 | 893.2  | 773.1 | 665.8 | 579.5 | 515.4 |
| 130°   | 1244.1 | 1202.2 | 1140.4 | 1100.8 | 1061.1 | 966.6  | 861.7  | 756.7 | 662.3 | 588.8 | 530.5 |
| 132.5° | 1187.0 | 1145.0 | 1087.9 | 1050.6 | 1013.3 | 927.0  | 832.5  | 741.6 | 661.1 | 595.8 | 544.5 |
| 135°   | 1124.0 | 1089.1 | 1031.9 | 998.7  | 965.5  | 889.7  | 806.9  | 728.8 | 660.0 | 602.8 | 556.2 |
| 137.5° | 1064.6 | 1028.4 | 979.5  | 949.8  | 920.0  | 852.4  | 782.4  | 717.1 | 657.6 | 607.5 | 565.5 |
| 140°   | 1003.9 | 971.3  | 927.0  | 901.9  | 876.8  | 820.9  | 761.4  | 706.6 | 656.5 | 612.2 | 572.5 |
| 142.5° | 943.3  | 915.3  | 879.2  | 858.2  | 837.2  | 790.6  | 741.6  | 697.3 | 654.1 | 615.7 | 579.5 |
| 145°   | 889.7  | 865.2  | 836.0  | 819.1  | 802.2  | 764.9  | 726.4  | 689.1 | 651.8 | 616.8 | 584.2 |
| 147.5° | 841.9  | 824.4  | 801.1  | 788.8  | 776.6  | 745.1  | 713.6  | 681.0 | 648.3 | 616.8 | 587.7 |
| 150°   | 803.4  | 790.6  | 773.1  | 762.0  | 750.9  | 726.4  | 699.6  | 672.8 | 643.6 | 616.8 | 588.8 |
| 152.5° | 771.9  | 760.2  | 747.4  | 738.6  | 729.9  | 708.9  | 686.8  | 663.5 | 637.8 | 613.3 | 591.2 |
| 155°   | 743.9  | 734.6  | 724.1  | 717.1  | 710.1  | 692.6  | 674.0  | 654.1 | 630.8 | 611.0 | 591.2 |
| 157.5° | 718.3  | 711.3  | 701.9  | 696.1  | 690.3  | 676.3  | 660.0  | 643.6 | 625.0 | 607.5 | 592.3 |
| 160°   | 696.1  | 689.1  | 681.0  | 676.9  | 672.8  | 661.1  | 648.3  | 633.1 | 618.0 | 605.2 | 592.3 |
| 162.5° | 672.8  | 667.0  | 662.3  | 658.8  | 655.3  | 644.8  | 634.3  | 622.7 | 611.0 | 600.5 | 591.2 |
| 165°   | 653.0  | 648.3  | 643.6  | 640.7  | 637.8  | 629.6  | 622.7  | 613.3 | 604.0 | 595.8 | 588.8 |
| 167.5° | 633.1  | 629.6  | 627.3  | 625.0  | 622.7  | 618.0  | 612.2  | 604.0 | 597.0 | 591.2 | 587.7 |
| 170°   | 615.7  | 613.3  | 612.2  | 611.0  | 609.8  | 605.2  | 601.7  | 595.8 | 590.0 | 586.5 | 584.2 |
| 172.5° | 601.7  | 599.3  | 599.3  | 598.8  | 598.2  | 594.7  | 592.3  | 587.7 | 584.2 | 583.0 | 583.0 |
| 175°   | 588.8  | 587.7  | 587.7  | 587.7  | 587.7  | 585.3  | 584.2  | 581.8 | 579.5 | 579.5 | 580.7 |
| 177.5° | 580.7  | 579.5  | 580.7  | 580.7  | 580.7  | 579.5  | 578.3  | 577.2 | 576.0 | 577.2 | 579.5 |
| 180°   | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0 | 576.0 | 576.0 | 576.0 |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 150°   | 155°   | 157.5° | 160°   | 165°   | 170°   | 175°   | 180°   | 185°   | 190°   | 195°   |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 |
| 2.5°   | 1440.2 | 1436.1 | 1436.1 | 1433.4 | 1425.3 | 1410.3 | 1409.0 | 1411.7 | 1403.5 | 1395.4 | 1383.2 |
| 5°     | 1510.9 | 1485.1 | 1476.9 | 1468.8 | 1452.5 | 1425.3 | 1414.4 | 1404.9 | 1390.0 | 1372.3 | 1353.3 |
| 7.5°   | 1570.7 | 1534.0 | 1523.1 | 1508.2 | 1475.5 | 1437.5 | 1413.0 | 1392.7 | 1372.3 | 1347.8 | 1324.7 |
| 10°    | 1645.4 | 1592.4 | 1566.6 | 1544.8 | 1500.0 | 1447.0 | 1410.3 | 1380.4 | 1347.8 | 1317.9 | 1288.0 |
| 12.5°  | 1729.6 | 1644.0 | 1635.9 | 1582.9 | 1531.3 | 1452.5 | 1407.6 | 1364.1 | 1320.7 | 1284.0 | 1252.7 |
| 15°    | 1800.3 | 1706.5 | 1672.6 | 1637.2 | 1538.0 | 1440.2 | 1396.7 | 1347.8 | 1297.6 | 1258.2 | 1212.0 |
| 17.5°  | 1845.1 | 1767.7 | 1695.7 | 1648.1 | 1544.8 | 1457.9 | 1373.6 | 1317.9 | 1264.9 | 1210.6 | 1172.6 |
| 20°    | 1899.5 | 1786.7 | 1724.2 | 1660.3 | 1558.4 | 1444.3 | 1360.1 | 1290.8 | 1225.5 | 1176.6 | 1130.4 |
| 22.5°  | 1953.8 | 1801.6 | 1750.0 | 1680.7 | 1561.1 | 1430.7 | 1335.6 | 1266.3 | 1191.6 | 1142.7 | 1092.4 |
| 25°    | 1948.4 | 1823.4 | 1737.8 | 1679.4 | 1534.0 | 1418.5 | 1307.1 | 1225.5 | 1156.3 | 1093.8 | 1043.5 |
| 27.5°  | 1952.5 | 1798.9 | 1712.0 | 1644.0 | 1515.0 | 1400.8 | 1277.2 | 1191.6 | 1119.6 | 1054.4 | 1001.4 |
| 30°    | 1953.8 | 1762.2 | 1686.1 | 1604.6 | 1479.6 | 1358.7 | 1243.2 | 1156.3 | 1080.2 | 1009.5 | 962.0  |
| 32.5°  | 1949.7 | 1732.3 | 1637.2 | 1563.9 | 1423.9 | 1317.9 | 1203.8 | 1111.4 | 1034.0 | 968.8  | 923.9  |
| 35°    | 1940.2 | 1697.0 | 1587.0 | 1494.6 | 1366.9 | 1259.5 | 1167.1 | 1072.0 | 989.1  | 929.4  | 877.7  |
| 37.5°  | 1914.4 | 1659.0 | 1534.0 | 1442.9 | 1300.3 | 1191.6 | 1110.1 | 1031.3 | 951.1  | 880.4  | 837.0  |
| 40°    | 1895.4 | 1607.3 | 1481.0 | 1381.8 | 1228.3 | 1122.3 | 1054.4 | 979.6  | 900.8  | 837.0  | 794.8  |
| 42.5°  | 1851.9 | 1558.4 | 1426.6 | 1308.4 | 1157.6 | 1048.9 | 985.1  | 925.3  | 857.3  | 794.8  | 756.8  |
| 45°    | 1781.3 | 1505.4 | 1360.1 | 1240.5 | 1080.2 | 976.9  | 918.5  | 869.6  | 809.8  | 750.0  | 712.0  |
| 47.5°  | 1682.1 | 1429.4 | 1289.4 | 1169.8 | 1004.1 | 899.5  | 841.0  | 804.4  | 756.8  | 706.5  | 673.9  |
| 50°    | 1574.7 | 1346.5 | 1217.4 | 1099.2 | 930.7  | 828.8  | 771.7  | 737.8  | 706.5  | 660.3  | 629.1  |
| 52.5°  | 1434.8 | 1258.2 | 1134.5 | 1021.7 | 851.9  | 754.1  | 703.8  | 679.4  | 646.7  | 614.1  | 587.0  |
| 55°    | 1298.9 | 1144.0 | 1042.1 | 934.8  | 774.5  | 683.4  | 634.5  | 608.7  | 589.7  | 562.5  | 540.8  |
| 57.5°  | 1141.3 | 1038.0 | 944.3  | 846.5  | 702.4  | 619.6  | 573.4  | 542.1  | 529.9  | 517.7  | 497.3  |
| 60°    | 995.9  | 917.1  | 841.0  | 759.5  | 627.7  | 553.0  | 508.2  | 483.7  | 471.5  | 463.3  | 449.7  |
| 62.5°  | 862.8  | 801.6  | 736.4  | 671.2  | 551.6  | 483.7  | 449.7  | 425.3  | 414.4  | 413.0  | 400.8  |
| 65°    | 735.1  | 691.6  | 638.6  | 574.7  | 481.0  | 421.2  | 388.6  | 373.6  | 361.4  | 361.4  | 351.9  |
| 67.5°  | 607.3  | 577.4  | 535.3  | 490.5  | 417.1  | 361.4  | 331.5  | 317.9  | 311.1  | 311.1  | 304.3  |
| 70°    | 505.4  | 485.1  | 447.0  | 407.6  | 343.8  | 301.6  | 278.5  | 266.3  | 262.2  | 263.6  | 258.2  |
| 72.5°  | 410.3  | 388.6  | 357.3  | 328.8  | 281.3  | 250.0  | 233.7  | 220.1  | 213.3  | 214.7  | 213.3  |
| 75°    | 317.9  | 307.1  | 279.9  | 258.2  | 220.1  | 198.4  | 183.4  | 176.6  | 171.2  | 172.6  | 169.8  |
| 77.5°  | 239.1  | 222.8  | 207.9  | 192.9  | 169.8  | 152.2  | 139.9  | 133.2  | 129.1  | 129.1  | 129.1  |
| 80°    | 163.0  | 160.3  | 148.1  | 139.9  | 120.9  | 107.3  | 97.8   | 96.5   | 92.4   | 92.4   | 92.4   |
| 82.5°  | 106.0  | 99.2   | 92.4   | 87.0   | 76.1   | 67.9   | 63.9   | 61.1   | 59.8   | 58.4   | 61.1   |
| 85°    | 58.4   | 54.3   | 51.6   | 46.2   | 42.1   | 38.0   | 34.0   | 32.6   | 31.3   | 32.6   | 31.3   |
| 87.5°  | 23.1   | 19.0   | 19.0   | 17.7   | 16.3   | 14.9   | 14.9   | 12.2   | 12.2   | 10.9   | 10.9   |
| 90°    | 18.7   | 15.2   | 14.0   | 12.8   | 10.5   | 7.0    | 4.7    | 2.3    | 4.7    | 7.0    | 10.5   |
| 92.5°  | 117.8  | 80.5   | 70.0   | 59.5   | 47.8   | 37.3   | 25.7   | 17.5   | 25.7   | 37.3   | 47.8   |
| 95°    | 250.7  | 151.6  | 128.8  | 106.1  | 75.8   | 56.0   | 43.1   | 39.6   | 43.1   | 56.0   | 75.8   |
| 97.5°  | 270.5  | 172.6  | 147.5  | 122.4  | 92.1   | 74.6   | 64.1   | 63.0   | 64.1   | 74.6   | 92.1   |
| 100°   | 267.0  | 185.4  | 162.6  | 139.9  | 111.9  | 95.6   | 87.5   | 86.3   | 87.5   | 95.6   | 111.9  |
| 102.5° | 271.7  | 200.6  | 180.1  | 159.7  | 135.3  | 120.1  | 113.1  | 110.8  | 113.1  | 120.1  | 135.3  |
| 105°   | 281.0  | 218.0  | 200.0  | 181.9  | 159.7  | 145.8  | 138.8  | 135.3  | 138.8  | 145.8  | 159.7  |
| 107.5° | 296.2  | 240.2  | 223.3  | 206.4  | 185.4  | 171.4  | 164.4  | 160.9  | 164.4  | 171.4  | 185.4  |
| 110°   | 316.0  | 263.5  | 247.2  | 230.9  | 211.0  | 198.2  | 192.4  | 188.9  | 192.4  | 198.2  | 211.0  |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 150°  | 155°  | 157.5° | 160°  | 165°  | 170°  | 175°  | 180°  | 185°  | 190°  | 195°  |
|--------|-------|-------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 335.8 | 288.0 | 272.2  | 256.5 | 236.7 | 223.9 | 218.0 | 214.5 | 218.0 | 223.9 | 236.7 |
| 115°   | 358.0 | 313.7 | 298.0  | 282.2 | 262.4 | 250.7 | 243.7 | 239.0 | 243.7 | 250.7 | 262.4 |
| 117.5° | 381.3 | 337.0 | 322.4  | 307.8 | 285.7 | 275.2 | 269.3 | 263.5 | 269.3 | 275.2 | 285.7 |
| 120°   | 403.4 | 361.5 | 346.9  | 332.3 | 310.2 | 298.5 | 292.7 | 289.2 | 292.7 | 298.5 | 310.2 |
| 122.5° | 426.8 | 386.0 | 370.2  | 354.5 | 333.5 | 320.7 | 314.8 | 311.3 | 314.8 | 320.7 | 333.5 |
| 125°   | 448.9 | 408.1 | 392.4  | 376.6 | 354.5 | 341.6 | 334.6 | 332.3 | 334.6 | 341.6 | 354.5 |
| 127.5° | 468.7 | 429.1 | 413.4  | 397.6 | 373.1 | 360.3 | 352.1 | 348.6 | 352.1 | 360.3 | 373.1 |
| 130°   | 486.2 | 447.7 | 432.0  | 416.3 | 391.8 | 377.8 | 367.3 | 363.8 | 367.3 | 377.8 | 391.8 |
| 132.5° | 501.4 | 464.1 | 449.0  | 433.8 | 409.3 | 391.8 | 380.1 | 375.5 | 380.1 | 391.8 | 409.3 |
| 135°   | 516.5 | 480.4 | 464.6  | 448.9 | 424.4 | 406.9 | 394.1 | 389.4 | 394.1 | 406.9 | 424.4 |
| 137.5° | 527.0 | 492.1 | 477.5  | 462.9 | 438.4 | 419.8 | 406.9 | 402.3 | 406.9 | 419.8 | 438.4 |
| 140°   | 537.5 | 503.7 | 489.2  | 474.6 | 451.2 | 432.6 | 420.9 | 415.1 | 420.9 | 432.6 | 451.2 |
| 142.5° | 545.7 | 513.0 | 499.6  | 486.2 | 462.9 | 446.6 | 433.8 | 429.1 | 433.8 | 446.6 | 462.9 |
| 145°   | 552.7 | 522.4 | 509.0  | 495.6 | 475.7 | 458.2 | 447.7 | 444.3 | 447.7 | 458.2 | 475.7 |
| 147.5° | 558.5 | 530.5 | 518.8  | 507.2 | 487.4 | 472.2 | 461.7 | 459.4 | 461.7 | 472.2 | 487.4 |
| 150°   | 564.4 | 537.5 | 527.0  | 516.5 | 500.2 | 485.1 | 475.7 | 474.6 | 475.7 | 485.1 | 500.2 |
| 152.5° | 567.8 | 545.7 | 535.8  | 525.9 | 511.9 | 499.1 | 489.7 | 489.7 | 489.7 | 499.1 | 511.9 |
| 155°   | 572.5 | 552.7 | 544.6  | 536.4 | 523.5 | 511.9 | 504.9 | 504.9 | 504.9 | 511.9 | 523.5 |
| 157.5° | 574.8 | 558.5 | 552.1  | 545.7 | 534.0 | 523.5 | 517.7 | 516.5 | 517.7 | 523.5 | 534.0 |
| 160°   | 578.3 | 564.4 | 558.6  | 552.7 | 544.5 | 535.2 | 530.5 | 530.5 | 530.5 | 535.2 | 544.5 |
| 162.5° | 579.5 | 567.8 | 563.2  | 558.5 | 551.5 | 544.5 | 541.0 | 541.0 | 541.0 | 544.5 | 551.5 |
| 165°   | 580.7 | 571.3 | 567.2  | 563.2 | 558.5 | 552.7 | 550.4 | 551.5 | 550.4 | 552.7 | 558.5 |
| 167.5° | 580.7 | 573.7 | 570.8  | 567.8 | 564.4 | 559.7 | 558.5 | 559.7 | 558.5 | 559.7 | 564.4 |
| 170°   | 579.5 | 573.7 | 572.5  | 571.3 | 569.0 | 565.5 | 564.4 | 566.7 | 564.4 | 565.5 | 569.0 |
| 172.5° | 579.5 | 574.8 | 574.2  | 573.7 | 572.5 | 570.2 | 570.2 | 571.3 | 570.2 | 570.2 | 572.5 |
| 175°   | 578.3 | 576.0 | 575.4  | 574.8 | 574.8 | 572.5 | 573.7 | 574.8 | 573.7 | 572.5 | 574.8 |
| 177.5° | 577.2 | 576.0 | 576.0  | 576.0 | 576.0 | 574.8 | 576.0 | 577.2 | 576.0 | 574.8 | 576.0 |
| 180°   | 576.0 | 576.0 | 576.0  | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 200°   | 202.5° | 205°   | 210°   | 215°   | 220°   | 225°   | 230°   | 235°   | 240°   | 245°   |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 |
| 2.5°   | 1380.4 | 1379.1 | 1381.8 | 1373.6 | 1360.1 | 1353.3 | 1334.2 | 1330.2 | 1328.8 | 1330.2 | 1331.5 |
| 5°     | 1342.4 | 1341.0 | 1337.0 | 1323.4 | 1307.1 | 1294.8 | 1271.7 | 1270.4 | 1262.2 | 1254.1 | 1258.2 |
| 7.5°   | 1305.7 | 1300.3 | 1292.1 | 1274.5 | 1252.7 | 1239.1 | 1220.1 | 1206.5 | 1195.7 | 1188.9 | 1183.4 |
| 10°    | 1269.0 | 1260.9 | 1252.7 | 1229.6 | 1202.4 | 1182.1 | 1159.0 | 1148.1 | 1135.9 | 1130.4 | 1125.0 |
| 12.5°  | 1221.5 | 1213.3 | 1198.4 | 1171.2 | 1154.9 | 1129.1 | 1106.0 | 1095.1 | 1088.3 | 1077.4 | 1070.7 |
| 15°    | 1183.4 | 1167.1 | 1159.0 | 1130.4 | 1096.5 | 1093.8 | 1051.6 | 1048.9 | 1035.3 | 1035.3 | 1024.5 |
| 17.5°  | 1139.9 | 1127.7 | 1112.8 | 1084.2 | 1059.8 | 1035.3 | 1013.6 | 1005.4 | 993.2  | 990.5  | 985.1  |
| 20°    | 1097.8 | 1081.5 | 1076.1 | 1047.6 | 1021.7 | 991.9  | 968.8  | 960.6  | 955.2  | 949.7  | 953.8  |
| 22.5°  | 1054.4 | 1040.8 | 1027.2 | 1001.4 | 982.3  | 952.4  | 938.9  | 930.7  | 922.6  | 919.8  | 921.2  |
| 25°    | 1012.2 | 1000.0 | 986.4  | 960.6  | 940.2  | 915.8  | 903.5  | 899.5  | 895.4  | 895.4  | 894.0  |
| 27.5°  | 971.5  | 959.2  | 947.0  | 923.9  | 903.5  | 885.9  | 876.4  | 872.3  | 868.2  | 870.9  | 873.6  |
| 30°    | 929.4  | 918.5  | 907.6  | 887.2  | 870.9  | 854.6  | 849.2  | 846.5  | 845.1  | 851.9  | 851.9  |
| 32.5°  | 891.3  | 881.8  | 873.6  | 854.6  | 838.3  | 824.7  | 820.7  | 822.0  | 823.4  | 827.4  | 830.2  |
| 35°    | 851.9  | 845.1  | 837.0  | 820.7  | 807.1  | 794.8  | 796.2  | 796.2  | 798.9  | 805.7  | 811.1  |
| 37.5°  | 816.6  | 807.1  | 800.3  | 786.7  | 775.8  | 764.9  | 769.0  | 773.1  | 775.8  | 784.0  | 786.7  |
| 40°    | 774.5  | 770.4  | 764.9  | 751.4  | 741.9  | 740.5  | 741.9  | 744.6  | 750.0  | 754.1  | 758.2  |
| 42.5°  | 740.5  | 735.1  | 728.3  | 717.4  | 709.2  | 710.6  | 712.0  | 714.7  | 717.4  | 724.2  | 728.3  |
| 45°    | 702.4  | 698.4  | 692.9  | 683.4  | 676.6  | 678.0  | 679.4  | 679.4  | 682.1  | 690.2  | 692.9  |
| 47.5°  | 660.3  | 661.7  | 654.9  | 645.4  | 641.3  | 641.3  | 641.3  | 644.0  | 650.8  | 653.5  | 654.9  |
| 50°    | 619.6  | 616.8  | 615.5  | 606.0  | 603.3  | 601.9  | 603.3  | 604.6  | 614.1  | 612.8  | 616.8  |
| 52.5°  | 576.1  | 576.1  | 574.7  | 569.3  | 565.2  | 565.2  | 562.5  | 569.3  | 572.0  | 574.7  | 578.8  |
| 55°    | 534.0  | 529.9  | 528.5  | 525.8  | 520.4  | 519.0  | 521.7  | 529.9  | 532.6  | 535.3  | 539.4  |
| 57.5°  | 487.8  | 487.8  | 485.1  | 481.0  | 481.0  | 481.0  | 481.0  | 486.4  | 490.5  | 493.2  | 501.4  |
| 60°    | 445.7  | 440.2  | 436.1  | 436.1  | 436.1  | 434.8  | 442.9  | 442.9  | 451.1  | 452.4  | 455.2  |
| 62.5°  | 395.4  | 392.7  | 389.9  | 391.3  | 389.9  | 392.7  | 395.4  | 400.8  | 402.2  | 406.3  | 410.3  |
| 65°    | 347.8  | 347.8  | 345.1  | 353.3  | 347.8  | 347.8  | 354.6  | 354.6  | 357.3  | 361.4  | 366.8  |
| 67.5°  | 301.6  | 303.0  | 300.3  | 300.3  | 303.0  | 304.3  | 305.7  | 311.1  | 312.5  | 317.9  | 324.7  |
| 70°    | 254.1  | 256.8  | 258.2  | 255.4  | 258.2  | 260.9  | 263.6  | 264.9  | 270.4  | 273.1  | 277.2  |
| 72.5°  | 212.0  | 214.7  | 210.6  | 212.0  | 213.3  | 216.0  | 217.4  | 220.1  | 222.8  | 231.0  | 233.7  |
| 75°    | 169.8  | 168.5  | 167.1  | 172.6  | 169.8  | 175.3  | 176.6  | 176.6  | 179.3  | 186.1  | 188.9  |
| 77.5°  | 130.4  | 130.4  | 131.8  | 129.1  | 133.2  | 131.8  | 133.2  | 137.2  | 141.3  | 141.3  | 152.2  |
| 80°    | 91.0   | 93.8   | 93.8   | 93.8   | 95.1   | 96.5   | 93.8   | 100.5  | 101.9  | 101.9  | 106.0  |
| 82.5°  | 58.4   | 59.8   | 58.4   | 61.1   | 61.1   | 63.9   | 62.5   | 63.9   | 66.6   | 69.3   | 70.7   |
| 85°    | 31.3   | 31.3   | 34.0   | 34.0   | 32.6   | 34.0   | 32.6   | 34.0   | 36.7   | 36.7   | 38.0   |
| 87.5°  | 10.9   | 10.9   | 10.9   | 10.9   | 12.2   | 10.9   | 12.2   | 12.2   | 10.9   | 10.9   | 14.9   |
| 90°    | 12.8   | 14.0   | 15.2   | 18.7   | 22.2   | 25.7   | 29.2   | 28.0   | 29.2   | 30.3   | 31.5   |
| 92.5°  | 59.5   | 70.0   | 80.5   | 117.8  | 179.6  | 240.2  | 216.9  | 162.1  | 115.4  | 89.8   | 78.1   |
| 95°    | 106.1  | 128.8  | 151.6  | 250.7  | 424.4  | 615.7  | 691.4  | 560.9  | 419.8  | 284.5  | 222.7  |
| 97.5°  | 122.4  | 147.5  | 172.6  | 270.5  | 472.2  | 794.1  | 1063.4 | 1099.6 | 964.3  | 727.6  | 573.7  |
| 100°   | 139.9  | 162.6  | 185.4  | 267.0  | 439.6  | 746.2  | 1104.2 | 1333.9 | 1374.7 | 1280.3 | 1143.9 |
| 102.5° | 159.7  | 180.1  | 200.6  | 271.7  | 411.6  | 676.3  | 1028.4 | 1345.6 | 1511.2 | 1531.0 | 1465.7 |
| 105°   | 181.9  | 200.0  | 218.0  | 281.0  | 401.1  | 621.5  | 937.5  | 1272.1 | 1515.8 | 1632.4 | 1654.6 |
| 107.5° | 206.4  | 223.3  | 240.2  | 296.2  | 398.8  | 581.8  | 857.0  | 1167.2 | 1445.9 | 1628.9 | 1719.9 |
| 110°   | 230.9  | 247.2  | 263.5  | 316.0  | 404.6  | 560.9  | 790.6  | 1069.2 | 1336.3 | 1550.8 | 1697.7 |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 200°  | 202.5° | 205°  | 210°  | 215°  | 220°  | 225°  | 230°  | 235°   | 240°   | 245°   |
|--------|-------|--------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| 112.5° | 256.5 | 272.2  | 288.0 | 335.8 | 416.3 | 549.2 | 746.2 | 984.1 | 1227.8 | 1448.2 | 1617.3 |
| 115°   | 282.2 | 298.0  | 313.7 | 358.0 | 429.1 | 548.0 | 717.1 | 918.8 | 1134.5 | 1337.4 | 1508.8 |
| 117.5° | 307.8 | 322.4  | 337.0 | 381.3 | 445.4 | 549.2 | 697.3 | 875.7 | 1062.2 | 1241.8 | 1399.2 |
| 120°   | 332.3 | 346.9  | 361.5 | 403.4 | 464.1 | 553.9 | 684.4 | 843.0 | 1007.4 | 1164.8 | 1304.8 |
| 122.5° | 354.5 | 370.2  | 386.0 | 426.8 | 481.6 | 562.0 | 676.3 | 816.2 | 964.3  | 1103.0 | 1230.1 |
| 125°   | 376.6 | 392.4  | 408.1 | 448.9 | 500.2 | 570.2 | 669.3 | 794.1 | 927.0  | 1054.1 | 1166.0 |
| 127.5° | 397.6 | 413.4  | 429.1 | 468.7 | 515.4 | 579.5 | 665.8 | 773.1 | 893.2  | 1008.6 | 1111.2 |
| 130°   | 416.3 | 432.0  | 447.7 | 486.2 | 530.5 | 588.8 | 662.3 | 756.7 | 861.7  | 966.6  | 1061.1 |
| 132.5° | 433.8 | 449.0  | 464.1 | 501.4 | 544.5 | 595.8 | 661.1 | 741.6 | 832.5  | 927.0  | 1013.3 |
| 135°   | 448.9 | 464.6  | 480.4 | 516.5 | 556.2 | 602.8 | 660.0 | 728.8 | 806.9  | 889.7  | 965.5  |
| 137.5° | 462.9 | 477.5  | 492.1 | 527.0 | 565.5 | 607.5 | 657.6 | 717.1 | 782.4  | 852.4  | 920.0  |
| 140°   | 474.6 | 489.2  | 503.7 | 537.5 | 572.5 | 612.2 | 656.5 | 706.6 | 761.4  | 820.9  | 876.8  |
| 142.5° | 486.2 | 499.6  | 513.0 | 545.7 | 579.5 | 615.7 | 654.1 | 697.3 | 741.6  | 790.6  | 837.2  |
| 145°   | 495.6 | 509.0  | 522.4 | 552.7 | 584.2 | 616.8 | 651.8 | 689.1 | 726.4  | 764.9  | 802.2  |
| 147.5° | 507.2 | 518.8  | 530.5 | 558.5 | 587.7 | 616.8 | 648.3 | 681.0 | 713.6  | 745.1  | 776.6  |
| 150°   | 516.5 | 527.0  | 537.5 | 564.4 | 588.8 | 616.8 | 643.6 | 672.8 | 699.6  | 726.4  | 750.9  |
| 152.5° | 525.9 | 535.8  | 545.7 | 567.8 | 591.2 | 613.3 | 637.8 | 663.5 | 686.8  | 708.9  | 729.9  |
| 155°   | 536.4 | 544.6  | 552.7 | 572.5 | 591.2 | 611.0 | 630.8 | 654.1 | 674.0  | 692.6  | 710.1  |
| 157.5° | 545.7 | 552.1  | 558.5 | 574.8 | 592.3 | 607.5 | 625.0 | 643.6 | 660.0  | 676.3  | 690.3  |
| 160°   | 552.7 | 558.6  | 564.4 | 578.3 | 592.3 | 605.2 | 618.0 | 633.1 | 648.3  | 661.1  | 672.8  |
| 162.5° | 558.5 | 563.2  | 567.8 | 579.5 | 591.2 | 600.5 | 611.0 | 622.7 | 634.3  | 644.8  | 655.3  |
| 165°   | 563.2 | 567.2  | 571.3 | 580.7 | 588.8 | 595.8 | 604.0 | 613.3 | 622.7  | 629.6  | 637.8  |
| 167.5° | 567.8 | 570.8  | 573.7 | 580.7 | 587.7 | 591.2 | 597.0 | 604.0 | 612.2  | 618.0  | 622.7  |
| 170°   | 571.3 | 572.5  | 573.7 | 579.5 | 584.2 | 586.5 | 590.0 | 595.8 | 601.7  | 605.2  | 609.8  |
| 172.5° | 573.7 | 574.2  | 574.8 | 579.5 | 583.0 | 583.0 | 584.2 | 587.7 | 592.3  | 594.7  | 598.2  |
| 175°   | 574.8 | 575.4  | 576.0 | 578.3 | 580.7 | 579.5 | 579.5 | 581.8 | 584.2  | 585.3  | 587.7  |
| 177.5° | 576.0 | 576.0  | 576.0 | 577.2 | 579.5 | 577.2 | 576.0 | 577.2 | 578.3  | 579.5  | 580.7  |
| 180°   | 576.0 | 576.0  | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0  | 576.0  | 576.0  |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 247.5° | 250°   | 255°   | 260°   | 265°   | 270°   | 275°   | 280°   | 285°   | 290°   | 292.5° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 |
| 2.5°   | 1330.2 | 1331.5 | 1326.1 | 1322.0 | 1332.9 | 1326.1 | 1326.1 | 1327.5 | 1324.7 | 1328.8 | 1327.5 |
| 5°     | 1255.4 | 1256.8 | 1247.3 | 1250.0 | 1244.6 | 1243.2 | 1241.9 | 1250.0 | 1248.6 | 1247.3 | 1250.0 |
| 7.5°   | 1182.1 | 1182.1 | 1178.0 | 1175.3 | 1175.3 | 1171.2 | 1176.6 | 1175.3 | 1178.0 | 1178.0 | 1182.1 |
| 10°    | 1120.9 | 1123.6 | 1116.9 | 1110.1 | 1108.7 | 1110.1 | 1110.1 | 1111.4 | 1112.8 | 1122.3 | 1120.9 |
| 12.5°  | 1070.7 | 1066.6 | 1065.2 | 1061.1 | 1054.4 | 1051.6 | 1048.9 | 1063.9 | 1059.8 | 1059.8 | 1059.8 |
| 15°    | 1014.9 | 1024.5 | 1023.1 | 1010.9 | 1008.2 | 1013.6 | 1010.9 | 1010.9 | 1024.5 | 1023.1 | 1021.7 |
| 17.5°  | 985.1  | 982.3  | 979.6  | 972.8  | 974.2  | 972.8  | 974.2  | 974.2  | 982.3  | 982.3  | 982.3  |
| 20°    | 951.1  | 945.7  | 945.7  | 942.9  | 942.9  | 938.9  | 944.3  | 945.7  | 951.1  | 951.1  | 952.4  |
| 22.5°  | 921.2  | 917.1  | 917.1  | 915.8  | 918.5  | 913.0  | 918.5  | 919.8  | 919.8  | 923.9  | 923.9  |
| 25°    | 895.4  | 892.7  | 892.7  | 895.4  | 895.4  | 895.4  | 895.4  | 900.8  | 896.7  | 898.1  | 896.7  |
| 27.5°  | 872.3  | 873.6  | 875.0  | 876.4  | 875.0  | 876.4  | 877.7  | 880.4  | 881.8  | 880.4  | 877.7  |
| 30°    | 850.5  | 854.6  | 856.0  | 856.0  | 858.7  | 860.1  | 861.4  | 861.4  | 862.8  | 858.7  | 861.4  |
| 32.5°  | 834.2  | 834.2  | 837.0  | 838.3  | 841.0  | 842.4  | 842.4  | 845.1  | 843.8  | 839.7  | 841.0  |
| 35°    | 811.1  | 811.1  | 816.6  | 819.3  | 823.4  | 822.0  | 823.4  | 823.4  | 824.7  | 822.0  | 817.9  |
| 37.5°  | 788.0  | 790.8  | 790.8  | 796.2  | 797.6  | 798.9  | 797.6  | 800.3  | 798.9  | 796.2  | 794.8  |
| 40°    | 760.9  | 759.5  | 760.9  | 764.9  | 766.3  | 766.3  | 766.3  | 769.0  | 769.0  | 769.0  | 767.7  |
| 42.5°  | 726.9  | 731.0  | 729.6  | 733.7  | 732.3  | 732.3  | 735.1  | 737.8  | 739.1  | 735.1  | 736.4  |
| 45°    | 694.3  | 694.3  | 697.0  | 697.0  | 698.4  | 698.4  | 703.8  | 701.1  | 703.8  | 701.1  | 702.4  |
| 47.5°  | 659.0  | 660.3  | 660.3  | 661.7  | 664.4  | 667.1  | 664.4  | 665.8  | 665.8  | 667.1  | 664.4  |
| 50°    | 619.6  | 619.6  | 622.3  | 626.4  | 631.8  | 629.1  | 627.7  | 633.2  | 629.1  | 629.1  | 626.4  |
| 52.5°  | 578.8  | 582.9  | 584.2  | 588.3  | 592.4  | 593.8  | 595.1  | 592.4  | 593.8  | 589.7  | 591.0  |
| 55°    | 539.4  | 540.8  | 546.2  | 550.3  | 554.3  | 554.3  | 553.0  | 554.3  | 555.7  | 550.3  | 550.3  |
| 57.5°  | 500.0  | 504.1  | 509.5  | 509.5  | 514.9  | 514.9  | 513.6  | 513.6  | 514.9  | 510.9  | 509.5  |
| 60°    | 457.9  | 462.0  | 468.8  | 468.8  | 476.9  | 478.3  | 475.5  | 472.8  | 472.8  | 468.8  | 470.1  |
| 62.5°  | 413.0  | 417.1  | 421.2  | 428.0  | 433.4  | 430.7  | 436.1  | 430.7  | 432.1  | 423.9  | 423.9  |
| 65°    | 373.6  | 375.0  | 381.8  | 388.6  | 388.6  | 391.3  | 388.6  | 389.9  | 385.9  | 385.9  | 380.4  |
| 67.5°  | 327.4  | 327.4  | 334.2  | 341.0  | 347.8  | 347.8  | 347.8  | 343.8  | 343.8  | 339.7  | 339.7  |
| 70°    | 286.7  | 285.3  | 292.1  | 296.2  | 300.3  | 301.6  | 298.9  | 297.6  | 294.8  | 290.8  | 289.4  |
| 72.5°  | 236.4  | 239.1  | 245.9  | 248.6  | 255.4  | 254.1  | 260.9  | 252.7  | 252.7  | 245.9  | 244.6  |
| 75°    | 191.6  | 194.3  | 201.1  | 205.2  | 209.2  | 209.2  | 213.3  | 209.2  | 203.8  | 201.1  | 199.7  |
| 77.5°  | 152.2  | 150.8  | 156.3  | 163.0  | 164.4  | 163.0  | 165.8  | 164.4  | 159.0  | 159.0  | 156.3  |
| 80°    | 108.7  | 112.8  | 118.2  | 116.8  | 122.3  | 120.9  | 120.9  | 118.2  | 118.2  | 114.1  | 116.8  |
| 82.5°  | 72.0   | 76.1   | 77.4   | 76.1   | 77.4   | 80.2   | 81.5   | 80.2   | 80.2   | 77.4   | 78.8   |
| 85°    | 38.0   | 38.0   | 40.8   | 42.1   | 40.8   | 40.8   | 42.1   | 46.2   | 43.5   | 40.8   | 43.5   |
| 87.5°  | 12.2   | 10.9   | 10.9   | 12.2   | 10.9   | 10.9   | 12.2   | 12.2   | 13.6   | 13.6   | 13.6   |
| 90°    | 32.6   | 33.8   | 32.6   | 33.8   | 35.0   | 33.8   | 35.0   | 33.8   | 32.6   | 33.8   | 32.6   |
| 92.5°  | 74.0   | 70.0   | 67.6   | 63.0   | 64.1   | 61.8   | 64.1   | 63.0   | 67.6   | 70.0   | 74.0   |
| 95°    | 201.7  | 180.7  | 158.6  | 148.1  | 139.9  | 135.3  | 139.9  | 148.1  | 158.6  | 180.7  | 201.7  |
| 97.5°  | 507.2  | 440.8  | 362.6  | 318.3  | 290.3  | 277.5  | 290.3  | 318.3  | 362.6  | 440.8  | 507.2  |
| 100°   | 1061.1 | 978.3  | 860.5  | 775.4  | 729.9  | 731.1  | 729.9  | 775.4  | 860.5  | 978.3  | 1061.1 |
| 102.5° | 1420.8 | 1375.9 | 1290.8 | 1227.8 | 1191.7 | 1157.9 | 1191.7 | 1227.8 | 1290.8 | 1375.9 | 1420.8 |
| 105°   | 1639.4 | 1624.3 | 1570.6 | 1526.3 | 1489.0 | 1483.2 | 1489.0 | 1526.3 | 1570.6 | 1624.3 | 1639.4 |
| 107.5° | 1735.6 | 1751.4 | 1744.4 | 1723.4 | 1708.2 | 1695.4 | 1708.2 | 1723.4 | 1744.4 | 1751.4 | 1735.6 |
| 110°   | 1738.5 | 1779.3 | 1812.0 | 1821.3 | 1819.0 | 1816.6 | 1819.0 | 1821.3 | 1812.0 | 1779.3 | 1738.5 |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 247.5° | 250°   | 255°   | 260°   | 265°   | 270°   | 275°   | 280°   | 285°   | 290°   | 292.5° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 1672.6 | 1728.0 | 1794.5 | 1828.3 | 1840.0 | 1841.1 | 1840.0 | 1828.3 | 1794.5 | 1728.0 | 1672.6 |
| 115°   | 1572.4 | 1635.9 | 1723.4 | 1774.7 | 1798.0 | 1803.8 | 1798.0 | 1774.7 | 1723.4 | 1635.9 | 1572.4 |
| 117.5° | 1465.1 | 1531.0 | 1621.9 | 1679.1 | 1714.0 | 1722.2 | 1714.0 | 1679.1 | 1621.9 | 1531.0 | 1465.1 |
| 120°   | 1363.6 | 1422.5 | 1514.7 | 1579.9 | 1607.9 | 1614.9 | 1607.9 | 1579.9 | 1514.7 | 1422.5 | 1363.6 |
| 122.5° | 1283.8 | 1337.4 | 1416.7 | 1473.8 | 1505.3 | 1514.7 | 1505.3 | 1473.8 | 1416.7 | 1337.4 | 1283.8 |
| 125°   | 1212.6 | 1259.3 | 1333.9 | 1385.2 | 1414.4 | 1422.5 | 1414.4 | 1385.2 | 1333.9 | 1259.3 | 1212.6 |
| 127.5° | 1154.4 | 1197.5 | 1265.1 | 1309.4 | 1336.3 | 1343.2 | 1336.3 | 1309.4 | 1265.1 | 1197.5 | 1154.4 |
| 130°   | 1100.8 | 1140.4 | 1202.2 | 1244.1 | 1268.6 | 1278.0 | 1268.6 | 1244.1 | 1202.2 | 1140.4 | 1100.8 |
| 132.5° | 1050.6 | 1087.9 | 1145.0 | 1187.0 | 1208.0 | 1213.8 | 1208.0 | 1187.0 | 1145.0 | 1087.9 | 1050.6 |
| 135°   | 998.7  | 1031.9 | 1089.1 | 1124.0 | 1145.0 | 1153.2 | 1145.0 | 1124.0 | 1089.1 | 1031.9 | 998.7  |
| 137.5° | 949.8  | 979.5  | 1028.4 | 1064.6 | 1082.1 | 1089.1 | 1082.1 | 1064.6 | 1028.4 | 979.5  | 949.8  |
| 140°   | 901.9  | 927.0  | 971.3  | 1003.9 | 1022.6 | 1021.4 | 1022.6 | 1003.9 | 971.3  | 927.0  | 901.9  |
| 142.5° | 858.2  | 879.2  | 915.3  | 943.3  | 959.6  | 958.5  | 959.6  | 943.3  | 915.3  | 879.2  | 858.2  |
| 145°   | 819.1  | 836.0  | 865.2  | 889.7  | 899.0  | 901.3  | 899.0  | 889.7  | 865.2  | 836.0  | 819.1  |
| 147.5° | 788.8  | 801.1  | 824.4  | 841.9  | 851.2  | 852.4  | 851.2  | 841.9  | 824.4  | 801.1  | 788.8  |
| 150°   | 762.0  | 773.1  | 790.6  | 803.4  | 810.4  | 810.4  | 810.4  | 803.4  | 790.6  | 773.1  | 762.0  |
| 152.5° | 738.6  | 747.4  | 760.2  | 771.9  | 775.4  | 775.4  | 775.4  | 771.9  | 760.2  | 747.4  | 738.6  |
| 155°   | 717.1  | 724.1  | 734.6  | 743.9  | 746.2  | 747.4  | 746.2  | 743.9  | 734.6  | 724.1  | 717.1  |
| 157.5° | 696.1  | 701.9  | 711.3  | 718.3  | 720.6  | 720.6  | 720.6  | 718.3  | 711.3  | 701.9  | 696.1  |
| 160°   | 676.9  | 681.0  | 689.1  | 696.1  | 696.1  | 694.9  | 696.1  | 696.1  | 689.1  | 681.0  | 676.9  |
| 162.5° | 658.8  | 662.3  | 667.0  | 672.8  | 672.8  | 671.6  | 672.8  | 672.8  | 667.0  | 662.3  | 658.8  |
| 165°   | 640.7  | 643.6  | 648.3  | 653.0  | 651.8  | 651.8  | 651.8  | 653.0  | 648.3  | 643.6  | 640.7  |
| 167.5° | 625.0  | 627.3  | 629.6  | 633.1  | 632.0  | 632.0  | 632.0  | 633.1  | 629.6  | 627.3  | 625.0  |
| 170°   | 611.0  | 612.2  | 613.3  | 615.7  | 614.5  | 614.5  | 614.5  | 615.7  | 613.3  | 612.2  | 611.0  |
| 172.5° | 598.8  | 599.3  | 599.3  | 601.7  | 599.3  | 598.2  | 599.3  | 601.7  | 599.3  | 599.3  | 598.8  |
| 175°   | 587.7  | 587.7  | 587.7  | 588.8  | 587.7  | 586.5  | 587.7  | 588.8  | 587.7  | 587.7  | 587.7  |
| 177.5° | 580.7  | 580.7  | 579.5  | 580.7  | 578.3  | 578.3  | 578.3  | 580.7  | 579.5  | 580.7  | 580.7  |
| 180°   | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  | 576.0  |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 295°   | 300°   | 305°   | 310°   | 315°   | 320°   | 325°   | 330°   | 335°   | 337.5° | 340°   |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 | 1402.2 |
| 2.5°   | 1331.5 | 1334.2 | 1335.6 | 1330.2 | 1326.1 | 1332.9 | 1342.4 | 1349.2 | 1354.6 | 1361.4 | 1365.5 |
| 5°     | 1252.7 | 1262.2 | 1262.2 | 1264.9 | 1269.0 | 1275.8 | 1293.5 | 1305.7 | 1316.6 | 1324.7 | 1331.5 |
| 7.5°   | 1186.1 | 1192.9 | 1197.0 | 1203.8 | 1210.6 | 1220.1 | 1240.5 | 1258.2 | 1274.5 | 1284.0 | 1294.8 |
| 10°    | 1126.4 | 1131.8 | 1138.6 | 1142.7 | 1154.9 | 1168.5 | 1194.3 | 1209.2 | 1228.3 | 1243.2 | 1256.8 |
| 12.5°  | 1069.3 | 1088.3 | 1092.4 | 1091.0 | 1101.9 | 1116.9 | 1142.7 | 1165.8 | 1186.1 | 1201.1 | 1216.0 |
| 15°    | 1028.5 | 1035.3 | 1043.5 | 1042.1 | 1065.2 | 1069.3 | 1091.0 | 1118.2 | 1145.4 | 1154.9 | 1168.5 |
| 17.5°  | 983.7  | 994.6  | 1002.7 | 1006.8 | 1013.6 | 1028.5 | 1048.9 | 1069.3 | 1104.6 | 1106.0 | 1141.3 |
| 20°    | 948.4  | 959.2  | 964.7  | 970.1  | 974.2  | 991.9  | 1009.5 | 1032.6 | 1061.1 | 1076.1 | 1095.1 |
| 22.5°  | 925.3  | 930.7  | 934.8  | 938.9  | 944.3  | 953.8  | 975.5  | 1001.4 | 1020.4 | 1036.7 | 1048.9 |
| 25°    | 898.1  | 903.5  | 909.0  | 911.7  | 915.8  | 921.2  | 937.5  | 957.9  | 985.1  | 995.9  | 1008.2 |
| 27.5°  | 879.1  | 879.1  | 881.8  | 881.8  | 887.2  | 892.7  | 904.9  | 923.9  | 945.7  | 959.2  | 975.5  |
| 30°    | 858.7  | 857.3  | 858.7  | 857.3  | 856.0  | 864.1  | 875.0  | 891.3  | 906.3  | 922.6  | 933.4  |
| 32.5°  | 838.3  | 837.0  | 837.0  | 838.3  | 832.9  | 837.0  | 842.4  | 857.3  | 873.6  | 881.8  | 894.0  |
| 35°    | 816.6  | 813.9  | 813.9  | 813.9  | 811.1  | 808.4  | 813.9  | 827.4  | 838.3  | 849.2  | 858.7  |
| 37.5°  | 794.8  | 790.8  | 790.8  | 788.0  | 785.3  | 781.3  | 781.3  | 792.1  | 807.1  | 811.1  | 823.4  |
| 40°    | 764.9  | 764.9  | 762.2  | 760.9  | 758.2  | 755.4  | 751.4  | 760.9  | 774.5  | 778.5  | 788.0  |
| 42.5°  | 735.1  | 731.0  | 729.6  | 729.6  | 729.6  | 725.5  | 722.8  | 729.6  | 737.8  | 744.6  | 750.0  |
| 45°    | 701.1  | 698.4  | 699.7  | 698.4  | 695.7  | 694.3  | 692.9  | 695.7  | 705.2  | 707.9  | 714.7  |
| 47.5°  | 664.4  | 663.0  | 663.0  | 661.7  | 660.3  | 661.7  | 656.3  | 663.0  | 665.8  | 668.5  | 673.9  |
| 50°    | 626.4  | 625.0  | 623.6  | 622.3  | 622.3  | 623.6  | 622.3  | 622.3  | 627.7  | 630.4  | 635.9  |
| 52.5°  | 588.3  | 584.2  | 584.2  | 582.9  | 582.9  | 580.2  | 582.9  | 584.2  | 587.0  | 589.7  | 592.4  |
| 55°    | 547.6  | 547.6  | 543.5  | 543.5  | 540.8  | 540.8  | 542.1  | 540.8  | 546.2  | 548.9  | 548.9  |
| 57.5°  | 508.2  | 502.7  | 504.1  | 501.4  | 498.6  | 497.3  | 497.3  | 500.0  | 502.7  | 502.7  | 505.4  |
| 60°    | 466.0  | 460.6  | 459.2  | 453.8  | 456.5  | 452.4  | 453.8  | 453.8  | 459.2  | 456.5  | 459.2  |
| 62.5°  | 423.9  | 417.1  | 413.0  | 410.3  | 410.3  | 411.7  | 409.0  | 407.6  | 410.3  | 413.0  | 418.5  |
| 65°    | 379.1  | 375.0  | 370.9  | 366.8  | 366.8  | 365.5  | 368.2  | 364.1  | 362.8  | 364.1  | 366.8  |
| 67.5°  | 332.9  | 328.8  | 324.7  | 320.7  | 322.0  | 317.9  | 315.2  | 319.3  | 316.6  | 317.9  | 320.7  |
| 70°    | 288.0  | 285.3  | 277.2  | 274.5  | 273.1  | 274.5  | 273.1  | 270.4  | 274.5  | 273.1  | 274.5  |
| 72.5°  | 243.2  | 240.5  | 236.4  | 229.6  | 229.6  | 228.3  | 226.9  | 226.9  | 225.5  | 225.5  | 225.5  |
| 75°    | 199.7  | 194.3  | 190.2  | 188.9  | 186.1  | 184.8  | 183.4  | 180.7  | 182.1  | 183.4  | 180.7  |
| 77.5°  | 154.9  | 148.1  | 146.7  | 146.7  | 142.7  | 142.7  | 144.0  | 142.7  | 141.3  | 141.3  | 141.3  |
| 80°    | 114.1  | 108.7  | 108.7  | 106.0  | 103.3  | 103.3  | 103.3  | 103.3  | 101.9  | 100.5  | 101.9  |
| 82.5°  | 73.4   | 72.0   | 70.7   | 70.7   | 73.4   | 67.9   | 70.7   | 69.3   | 67.9   | 67.9   | 66.6   |
| 85°    | 40.8   | 42.1   | 40.8   | 42.1   | 39.4   | 40.8   | 40.8   | 40.8   | 39.4   | 40.8   | 38.0   |
| 87.5°  | 14.9   | 14.9   | 14.9   | 16.3   | 16.3   | 16.3   | 16.3   | 16.3   | 17.7   | 16.3   | 16.3   |
| 90°    | 31.5   | 30.3   | 29.2   | 28.0   | 29.2   | 25.7   | 22.2   | 18.7   | 15.2   | 14.0   | 12.8   |
| 92.5°  | 78.1   | 89.8   | 115.4  | 162.1  | 216.9  | 240.2  | 179.6  | 117.8  | 80.5   | 70.0   | 59.5   |
| 95°    | 222.7  | 284.5  | 419.8  | 560.9  | 691.4  | 615.7  | 424.4  | 250.7  | 151.6  | 128.8  | 106.1  |
| 97.5°  | 573.7  | 727.6  | 964.3  | 1099.6 | 1063.4 | 794.1  | 472.2  | 270.5  | 172.6  | 147.5  | 122.4  |
| 100°   | 1143.9 | 1280.3 | 1374.7 | 1333.9 | 1104.2 | 746.2  | 439.6  | 267.0  | 185.4  | 162.6  | 139.9  |
| 102.5° | 1465.7 | 1531.0 | 1511.2 | 1345.6 | 1028.4 | 676.3  | 411.6  | 271.7  | 200.6  | 180.1  | 159.7  |
| 105°   | 1654.6 | 1632.4 | 1515.8 | 1272.1 | 937.5  | 621.5  | 401.1  | 281.0  | 218.0  | 200.0  | 181.9  |
| 107.5° | 1719.9 | 1628.9 | 1445.9 | 1167.2 | 857.0  | 581.8  | 398.8  | 296.2  | 240.2  | 223.3  | 206.4  |
| 110°   | 1697.7 | 1550.8 | 1336.3 | 1069.2 | 790.6  | 560.9  | 404.6  | 316.0  | 263.5  | 247.2  | 230.9  |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 295°   | 300°   | 305°   | 310°  | 315°  | 320°  | 325°  | 330°  | 335°  | 337.5° | 340°  |
|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|--------|-------|
| 112.5° | 1617.3 | 1448.2 | 1227.8 | 984.1 | 746.2 | 549.2 | 416.3 | 335.8 | 288.0 | 272.2  | 256.5 |
| 115°   | 1508.8 | 1337.4 | 1134.5 | 918.8 | 717.1 | 548.0 | 429.1 | 358.0 | 313.7 | 298.0  | 282.2 |
| 117.5° | 1399.2 | 1241.8 | 1062.2 | 875.7 | 697.3 | 549.2 | 445.4 | 381.3 | 337.0 | 322.4  | 307.8 |
| 120°   | 1304.8 | 1164.8 | 1007.4 | 843.0 | 684.4 | 553.9 | 464.1 | 403.4 | 361.5 | 346.9  | 332.3 |
| 122.5° | 1230.1 | 1103.0 | 964.3  | 816.2 | 676.3 | 562.0 | 481.6 | 426.8 | 386.0 | 370.2  | 354.5 |
| 125°   | 1166.0 | 1054.1 | 927.0  | 794.1 | 669.3 | 570.2 | 500.2 | 448.9 | 408.1 | 392.4  | 376.6 |
| 127.5° | 1111.2 | 1008.6 | 893.2  | 773.1 | 665.8 | 579.5 | 515.4 | 468.7 | 429.1 | 413.4  | 397.6 |
| 130°   | 1061.1 | 966.6  | 861.7  | 756.7 | 662.3 | 588.8 | 530.5 | 486.2 | 447.7 | 432.0  | 416.3 |
| 132.5° | 1013.3 | 927.0  | 832.5  | 741.6 | 661.1 | 595.8 | 544.5 | 501.4 | 464.1 | 449.0  | 433.8 |
| 135°   | 965.5  | 889.7  | 806.9  | 728.8 | 660.0 | 602.8 | 556.2 | 516.5 | 480.4 | 464.6  | 448.9 |
| 137.5° | 920.0  | 852.4  | 782.4  | 717.1 | 657.6 | 607.5 | 565.5 | 527.0 | 492.1 | 477.5  | 462.9 |
| 140°   | 876.8  | 820.9  | 761.4  | 706.6 | 656.5 | 612.2 | 572.5 | 537.5 | 503.7 | 489.2  | 474.6 |
| 142.5° | 837.2  | 790.6  | 741.6  | 697.3 | 654.1 | 615.7 | 579.5 | 545.7 | 513.0 | 499.6  | 486.2 |
| 145°   | 802.2  | 764.9  | 726.4  | 689.1 | 651.8 | 616.8 | 584.2 | 552.7 | 522.4 | 509.0  | 495.6 |
| 147.5° | 776.6  | 745.1  | 713.6  | 681.0 | 648.3 | 616.8 | 587.7 | 558.5 | 530.5 | 518.8  | 507.2 |
| 150°   | 750.9  | 726.4  | 699.6  | 672.8 | 643.6 | 616.8 | 588.8 | 564.4 | 537.5 | 527.0  | 516.5 |
| 152.5° | 729.9  | 708.9  | 686.8  | 663.5 | 637.8 | 613.3 | 591.2 | 567.8 | 545.7 | 535.8  | 525.9 |
| 155°   | 710.1  | 692.6  | 674.0  | 654.1 | 630.8 | 611.0 | 591.2 | 572.5 | 552.7 | 544.6  | 536.4 |
| 157.5° | 690.3  | 676.3  | 660.0  | 643.6 | 625.0 | 607.5 | 592.3 | 574.8 | 558.5 | 552.1  | 545.7 |
| 160°   | 672.8  | 661.1  | 648.3  | 633.1 | 618.0 | 605.2 | 592.3 | 578.3 | 564.4 | 558.6  | 552.7 |
| 162.5° | 655.3  | 644.8  | 634.3  | 622.7 | 611.0 | 600.5 | 591.2 | 579.5 | 567.8 | 563.2  | 558.5 |
| 165°   | 637.8  | 629.6  | 622.7  | 613.3 | 604.0 | 595.8 | 588.8 | 580.7 | 571.3 | 567.2  | 563.2 |
| 167.5° | 622.7  | 618.0  | 612.2  | 604.0 | 597.0 | 591.2 | 587.7 | 580.7 | 573.7 | 570.8  | 567.8 |
| 170°   | 609.8  | 605.2  | 601.7  | 595.8 | 590.0 | 586.5 | 584.2 | 579.5 | 573.7 | 572.5  | 571.3 |
| 172.5° | 598.2  | 594.7  | 592.3  | 587.7 | 584.2 | 583.0 | 583.0 | 579.5 | 574.8 | 574.2  | 573.7 |
| 175°   | 587.7  | 585.3  | 584.2  | 581.8 | 579.5 | 579.5 | 580.7 | 578.3 | 576.0 | 575.4  | 574.8 |
| 177.5° | 580.7  | 579.5  | 578.3  | 577.2 | 576.0 | 577.2 | 579.5 | 577.2 | 576.0 | 576.0  | 576.0 |
| 180°   | 576.0  | 576.0  | 576.0  | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0 | 576.0  | 576.0 |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 345°   | 350°   | 355°   | 360°   |
|--------|--------|--------|--------|--------|
| 0°     | 1402.2 | 1402.2 | 1402.2 | 1402.2 |
| 2.5°   | 1372.3 | 1376.4 | 1390.0 | 1406.3 |
| 5°     | 1345.1 | 1356.0 | 1375.0 | 1400.8 |
| 7.5°   | 1315.2 | 1331.5 | 1358.7 | 1391.3 |
| 10°    | 1281.3 | 1304.4 | 1338.3 | 1379.1 |
| 12.5°  | 1244.6 | 1274.5 | 1317.9 | 1360.1 |
| 15°    | 1221.5 | 1251.4 | 1290.8 | 1337.0 |
| 17.5°  | 1176.6 | 1212.0 | 1252.7 | 1317.9 |
| 20°    | 1130.4 | 1169.8 | 1222.8 | 1288.0 |
| 22.5°  | 1095.1 | 1137.2 | 1187.5 | 1256.8 |
| 25°    | 1053.0 | 1096.5 | 1150.8 | 1222.8 |
| 27.5°  | 1008.2 | 1051.6 | 1112.8 | 1188.9 |
| 30°    | 974.2  | 1016.3 | 1074.7 | 1156.3 |
| 32.5°  | 933.4  | 974.2  | 1035.3 | 1120.9 |
| 35°    | 887.2  | 933.4  | 991.9  | 1078.8 |
| 37.5°  | 851.9  | 894.0  | 955.2  | 1038.0 |
| 40°    | 813.9  | 850.5  | 910.3  | 991.9  |
| 42.5°  | 773.1  | 813.9  | 865.5  | 947.0  |
| 45°    | 735.1  | 764.9  | 817.9  | 895.4  |
| 47.5°  | 694.3  | 728.3  | 769.0  | 828.8  |
| 50°    | 650.8  | 679.4  | 724.2  | 764.9  |
| 52.5°  | 608.7  | 631.8  | 669.8  | 701.1  |
| 55°    | 563.9  | 587.0  | 615.5  | 634.5  |
| 57.5°  | 521.7  | 538.0  | 557.1  | 569.3  |
| 60°    | 470.1  | 486.4  | 498.6  | 510.9  |
| 62.5°  | 423.9  | 436.1  | 442.9  | 449.7  |
| 65°    | 376.4  | 383.2  | 387.2  | 392.7  |
| 67.5°  | 324.7  | 331.5  | 332.9  | 341.0  |
| 70°    | 277.2  | 278.5  | 281.3  | 285.3  |
| 72.5°  | 232.3  | 235.1  | 233.7  | 236.4  |
| 75°    | 186.1  | 188.9  | 186.1  | 188.9  |
| 77.5°  | 141.3  | 144.0  | 144.0  | 148.1  |
| 80°    | 101.9  | 103.3  | 104.6  | 104.6  |
| 82.5°  | 66.6   | 70.7   | 67.9   | 69.3   |
| 85°    | 38.0   | 39.4   | 39.4   | 40.8   |
| 87.5°  | 17.7   | 19.0   | 17.7   | 20.4   |
| 90°    | 10.5   | 7.0    | 4.7    | 2.3    |
| 92.5°  | 47.8   | 37.3   | 25.7   | 17.5   |
| 95°    | 75.8   | 56.0   | 43.1   | 39.6   |
| 97.5°  | 92.1   | 74.6   | 64.1   | 63.0   |
| 100°   | 111.9  | 95.6   | 87.5   | 86.3   |
| 102.5° | 135.3  | 120.1  | 113.1  | 110.8  |
| 105°   | 159.7  | 145.8  | 138.8  | 135.3  |
| 107.5° | 185.4  | 171.4  | 164.4  | 160.9  |
| 110°   | 211.0  | 198.2  | 192.4  | 188.9  |

TEST NUMBER: P1011084

CATALOG NUMBER: S123DIP-B1000D1195UB35-4F0-XX-W2A-A4

**CANDELA DISTRIBUTION (continued):**

|        | 345°  | 350°  | 355°  | 360°  |
|--------|-------|-------|-------|-------|
| 112.5° | 236.7 | 223.9 | 218.0 | 214.5 |
| 115°   | 262.4 | 250.7 | 243.7 | 239.0 |
| 117.5° | 285.7 | 275.2 | 269.3 | 263.5 |
| 120°   | 310.2 | 298.5 | 292.7 | 289.2 |
| 122.5° | 333.5 | 320.7 | 314.8 | 311.3 |
| 125°   | 354.5 | 341.6 | 334.6 | 332.3 |
| 127.5° | 373.1 | 360.3 | 352.1 | 348.6 |
| 130°   | 391.8 | 377.8 | 367.3 | 363.8 |
| 132.5° | 409.3 | 391.8 | 380.1 | 375.5 |
| 135°   | 424.4 | 406.9 | 394.1 | 389.4 |
| 137.5° | 438.4 | 419.8 | 406.9 | 402.3 |
| 140°   | 451.2 | 432.6 | 420.9 | 415.1 |
| 142.5° | 462.9 | 446.6 | 433.8 | 429.1 |
| 145°   | 475.7 | 458.2 | 447.7 | 444.3 |
| 147.5° | 487.4 | 472.2 | 461.7 | 459.4 |
| 150°   | 500.2 | 485.1 | 475.7 | 474.6 |
| 152.5° | 511.9 | 499.1 | 489.7 | 489.7 |
| 155°   | 523.5 | 511.9 | 504.9 | 504.9 |
| 157.5° | 534.0 | 523.5 | 517.7 | 516.5 |
| 160°   | 544.5 | 535.2 | 530.5 | 530.5 |
| 162.5° | 551.5 | 544.5 | 541.0 | 541.0 |
| 165°   | 558.5 | 552.7 | 550.4 | 551.5 |
| 167.5° | 564.4 | 559.7 | 558.5 | 559.7 |
| 170°   | 569.0 | 565.5 | 564.4 | 566.7 |
| 172.5° | 572.5 | 570.2 | 570.2 | 571.3 |
| 175°   | 574.8 | 572.5 | 573.7 | 574.8 |
| 177.5° | 576.0 | 574.8 | 576.0 | 577.2 |
| 180°   | 576.0 | 576.0 | 576.0 | 576.0 |

(END OF REPORT)