

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302938

Luminaire Tested: P3RT02R409024DE010 E3CBUS1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302938
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-90)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3RT02R409024DE010 E3CBUS1MW
Description: 3in Adjustable LED luminaire with, R40 optic, 2400K CCT AND, 90CRI , E3CBUS1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 316.0 lumens
Efficiency: N/A
Efficacy: 87.8 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.55
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302938
CATALOG NUMBER: P3RT02R409024DE010 E3CBUS1MW

Luminous Intensity Polar Plot

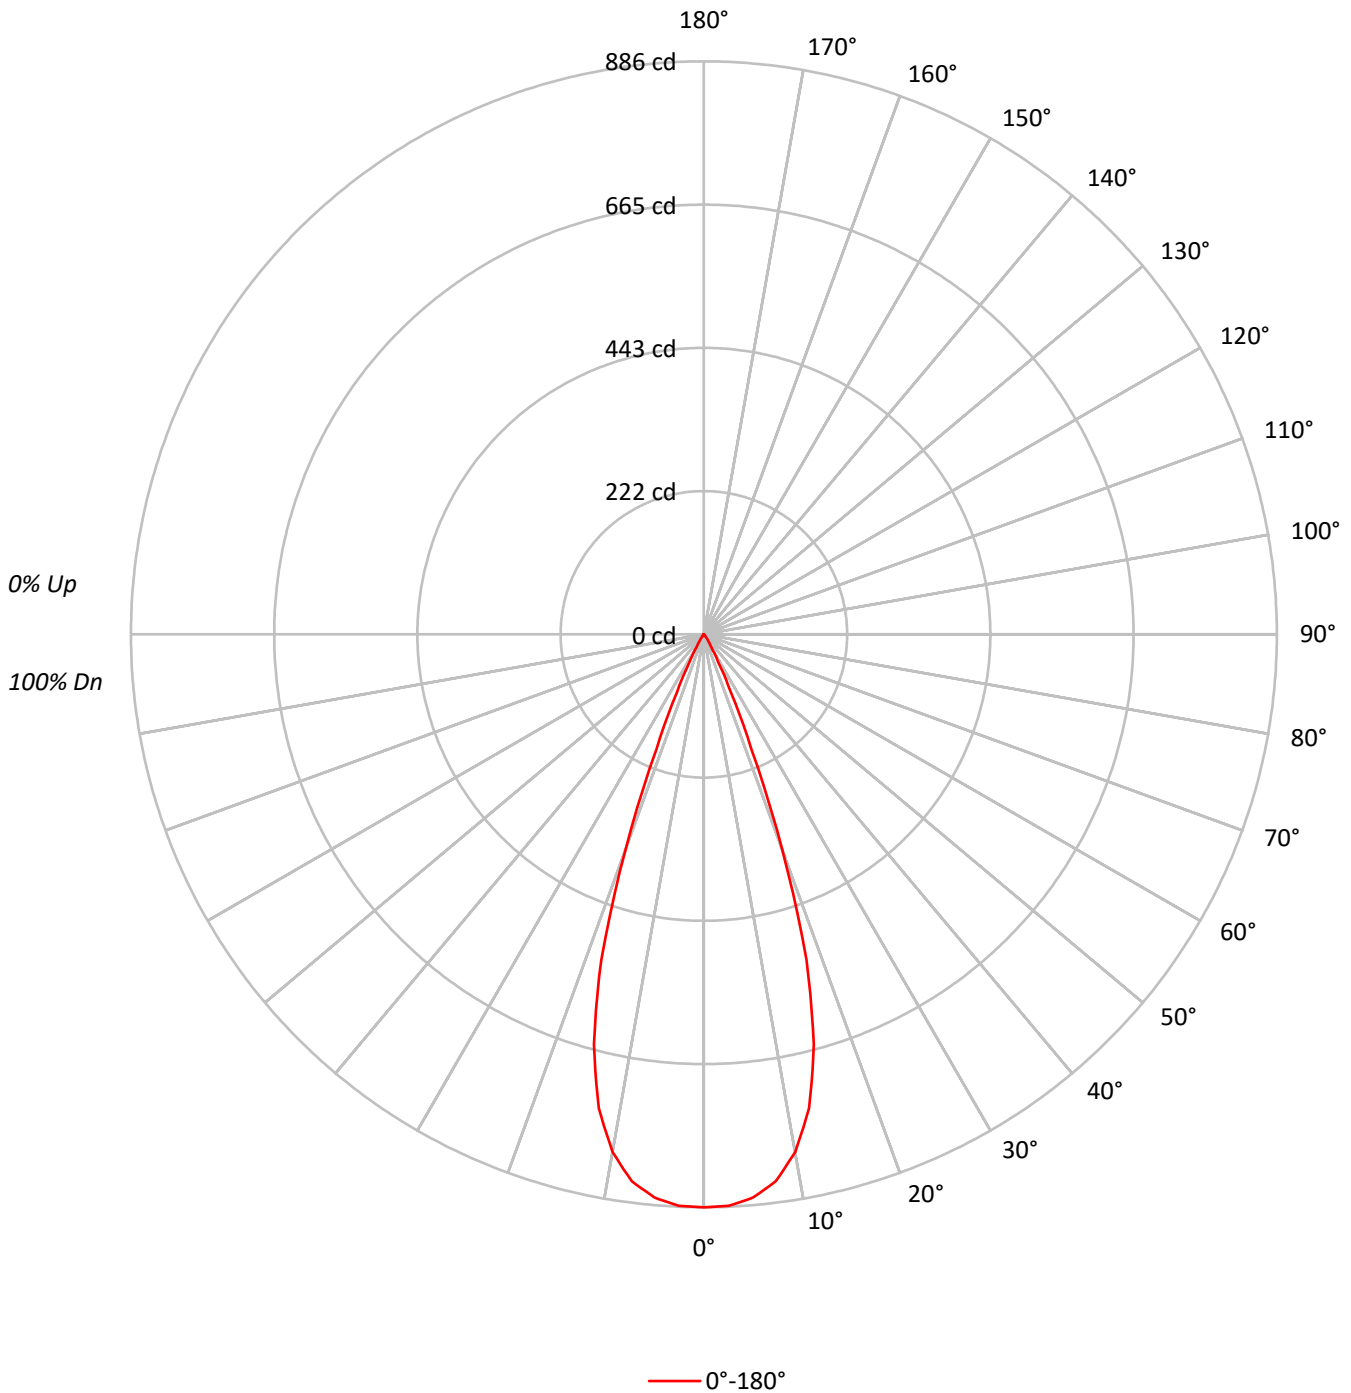



TEST NUMBER: P1302938

CATALOG NUMBER: P3RT02R409024DE010 E3CBUS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.6	25.8
10°-20°	171.9	54.4
20°-30°	56.6	17.9
30°-40°	5.7	1.8
40°-50°	0.3	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	310.0	98.1
0°-40°	315.7	99.9
0°-60°	316.0	100.0
0°-90°	316.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	316.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	886	
5°	874	82
15°	657	172
25°	99	57
35°	8	6
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1302938
CATALOG NUMBER: P3RT02R409024DE010 E3CBUS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	886.0
2.5°	884.6
5°	874.3
7.5°	852.9
10°	812.7
12.5°	750.6
15°	656.8
17.5°	527.5
20°	353.8
22.5°	190.9
25°	99.0
27.5°	47.1
30°	23.3
32.5°	13.1
35°	7.9
37.5°	4.2
40°	1.9
42.5°	0.5
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)