

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302971

Luminaire Tested: P3RT05R309024DE010 E3CBUS1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302971
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-88)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3RT05R309024DE010 E3CBUS1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 2400K CCT AND, 90CRI , E3CBUS1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 614.0 lumens
Efficiency: N/A
Efficacy: 85.3 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.5 / 0.45
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302971
CATALOG NUMBER: P3RT05R309024DE010 E3CBUS1MW

Luminous Intensity Polar Plot

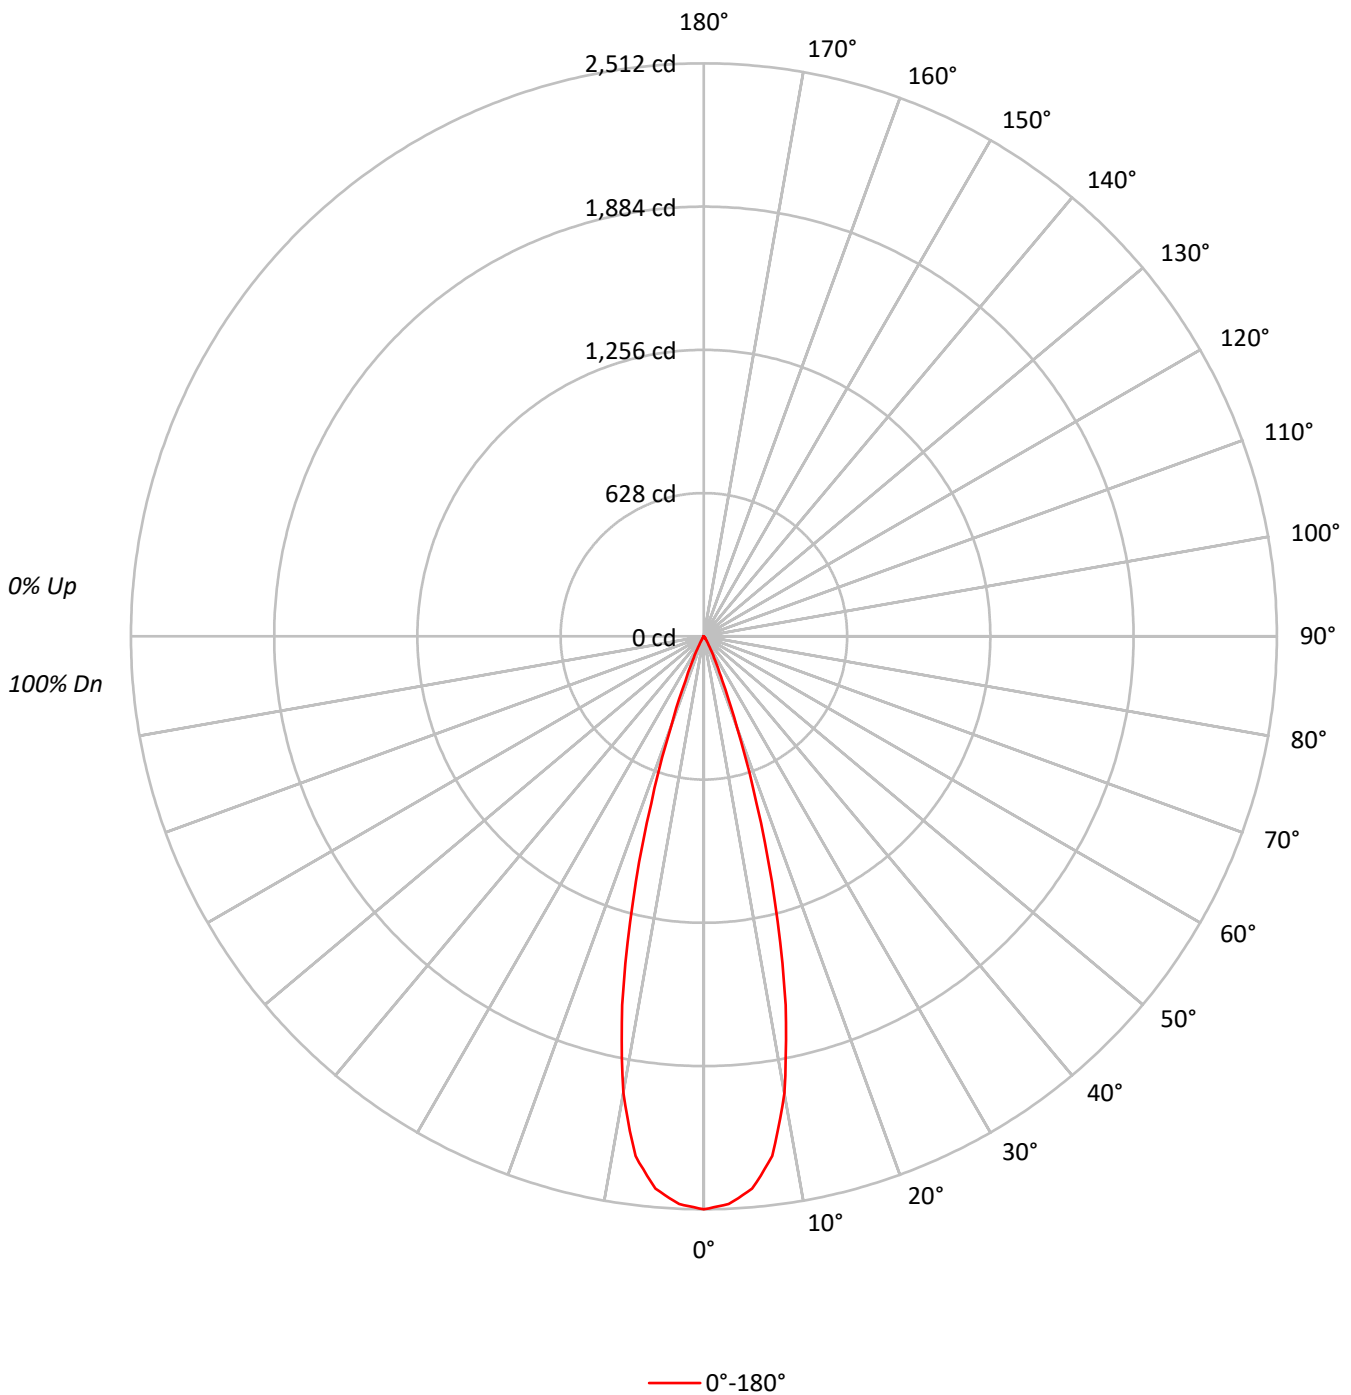



TEST NUMBER: P1302971
 CATALOG NUMBER: P3RT05R309024DE010 E3CBUS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99	100
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	97	97	97
2	112	108	105	103	110	107	104	102	104	101	100	101	99	98	98	97	96	96	96	96	94
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	105	100	97	94	104	99	96	93	97	94	92	95	93	91	94	92	90	89	89	89	89
5	102	97	93	90	101	96	93	90	95	91	89	93	90	88	92	89	88	87	87	87	87
6	100	94	90	87	99	93	90	87	92	89	86	91	88	86	90	87	85	84	84	84	84
7	97	91	87	84	96	91	87	84	90	86	84	89	86	83	88	85	83	82	82	82	82
8	95	89	85	82	94	88	84	82	87	84	82	86	83	81	86	83	81	80	80	80	80
9	92	86	82	80	92	86	82	80	85	82	79	84	81	79	84	81	79	78	78	78	78
10	90	84	80	78	90	84	80	78	83	80	77	82	79	77	82	79	77	76	76	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	550767
5°	535130
10°	452920
15°	272782
20°	98242
25°	27606
30°	7292
35°	2811
40°	1088
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 0 cd/sqm



TEST NUMBER: P1302971
 CATALOG NUMBER: P3RT05R309024DE010 E3CBUS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	220.0	35.8
10°-20°	319.8	52.1
20°-30°	66.0	10.8
30°-40°	7.7	1.3
40°-50°	0.5	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	605.8	98.7
0°-40°	613.5	99.9
0°-60°	614.0	100.0
0°-90°	614.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	614.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2512	
5°	2431	220
15°	1202	320
25°	114	66
35°	10	8
45°	0	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1302971
CATALOG NUMBER: P3RT05R309024DE010 E3CBUS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2511.7
2.5°	2491.5
5°	2431.1
7.5°	2297.8
10°	2034.1
12.5°	1655.3
15°	1201.6
17.5°	769.1
20°	421.0
22.5°	211.0
25°	114.1
27.5°	62.3
30°	28.8
32.5°	17.3
35°	10.5
37.5°	6.7
40°	3.8
42.5°	1.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)