

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1304762

Luminaire Tested: P3RT17R309835DE010 E3CBUS1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1304762  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-88)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3RT17R309835DE010 E3CBUS1MW  
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 98CRI , E3CBUS1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1705.0 lumens  
Efficiency: N/A  
Efficacy: 83.6 lumens/watt  
Spacing Criteria (0/90/45): 0.5 / 0.5 / 0.45  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 20.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1304762  
CATALOG NUMBER: P3RT17R309835DE010 E3CBUS1MW

### Luminous Intensity Polar Plot

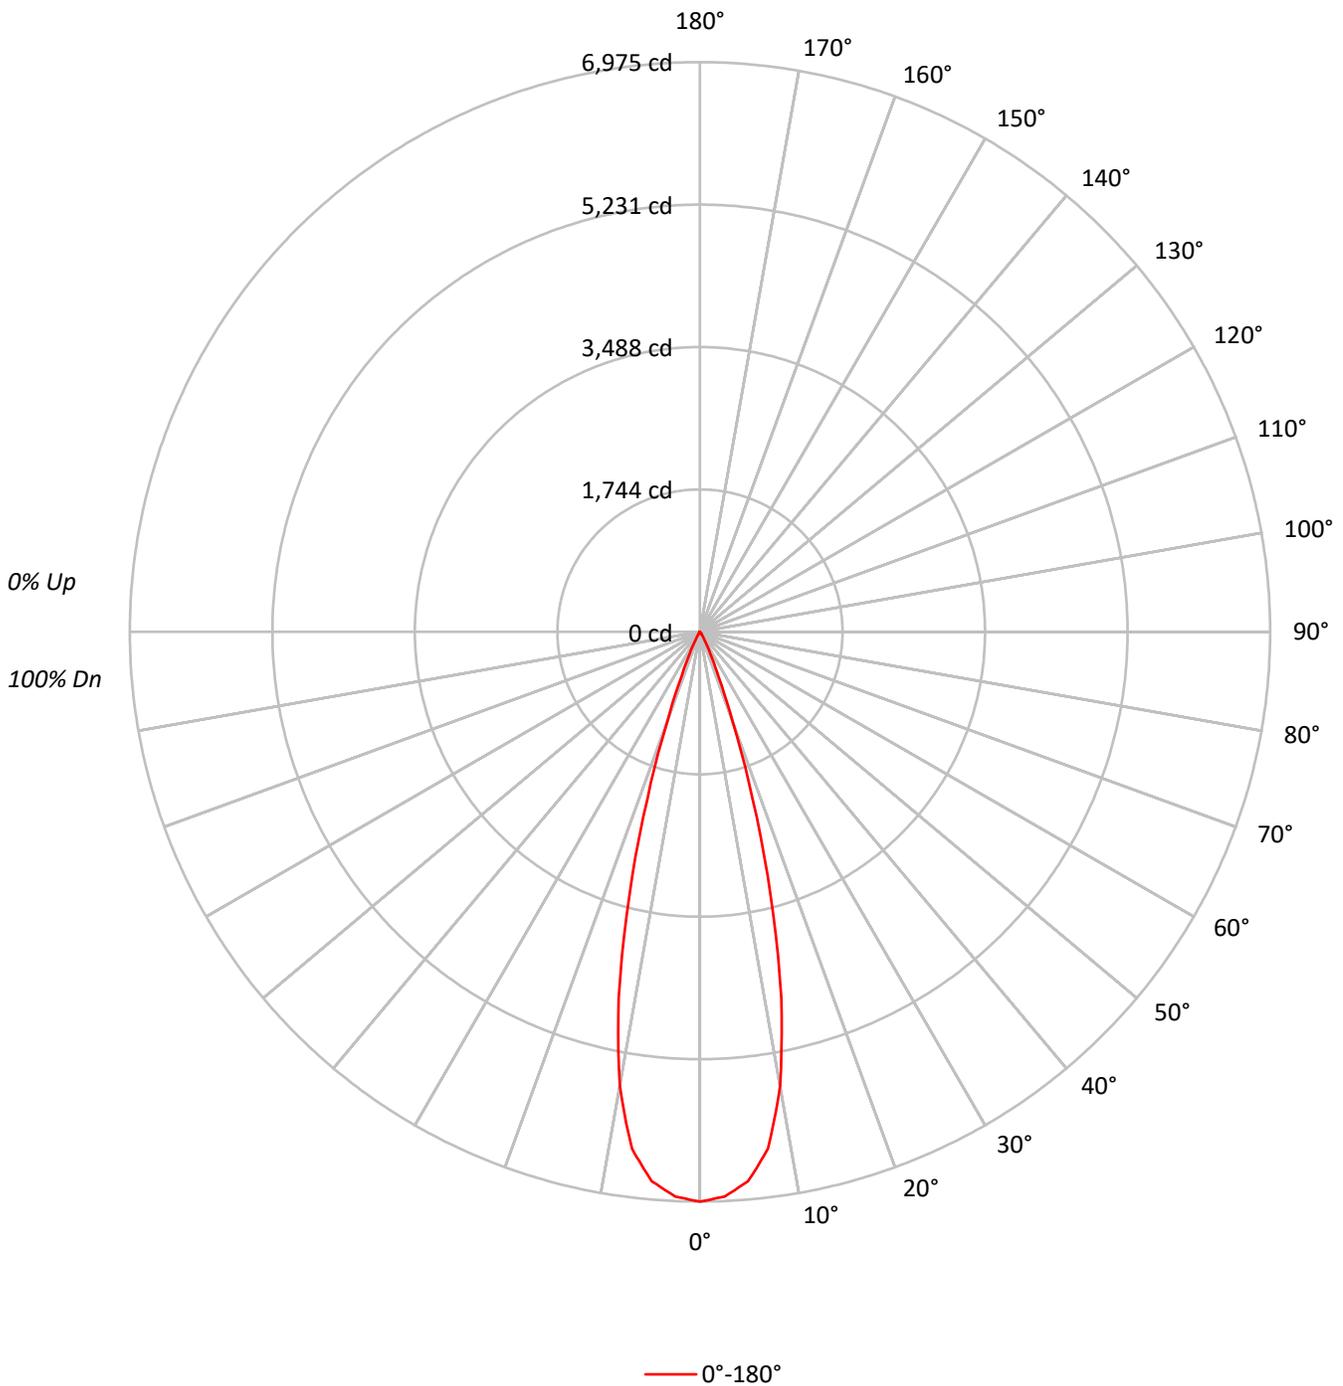



TEST NUMBER: P1304762  
 CATALOG NUMBER: P3RT17R309835DE010 E3CBUS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	99	99	99	97
2	112	108	105	103	110	107	104	102	104	101	100	101	99	98	98	97	96	98	97	96	94
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	96	94	93	92
4	105	100	97	94	104	99	96	93	97	94	92	95	93	91	94	92	90	94	92	90	89
5	102	97	93	90	101	96	93	90	95	91	89	93	90	88	92	89	88	92	89	88	87
6	100	94	90	87	99	93	90	87	92	89	86	91	88	86	90	87	85	90	87	85	84
7	97	91	87	84	96	91	87	84	90	86	84	89	86	83	88	85	83	88	85	83	82
8	95	89	85	82	94	88	84	82	87	84	82	86	83	81	86	83	81	86	83	81	80
9	92	86	82	80	92	86	82	80	85	82	79	84	81	79	84	81	79	84	81	79	78
10	90	84	80	78	90	84	80	78	83	80	77	82	79	77	82	79	77	82	79	77	76

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1529395
5°	1485997
10°	1257692
15°	757507
20°	272814
25°	76674
30°	20231
35°	7843
40°	3063
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 0 cd/sqm



TEST NUMBER: P1304762

CATALOG NUMBER: P3RT17R309835DE010 E3CBUS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	610.9	35.8
10°-20°	887.9	52.1
20°-30°	183.4	10.8
30°-40°	21.4	1.3
40°-50°	1.5	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1682.2	98.7
0°-40°	1703.5	99.9
0°-60°	1705.0	100.0
0°-90°	1705.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1705.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6975	
5°	6751	611
15°	3337	888
25°	317	183
35°	29	21
45°	0	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1304762  
CATALOG NUMBER: P3RT17R309835DE010 E3CBUS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6974.6
2.5°	6918.6
5°	6750.9
7.5°	6380.7
10°	5648.4
12.5°	4596.4
15°	3336.8
17.5°	2135.8
20°	1169.1
22.5°	585.9
25°	316.9
27.5°	173.1
30°	79.9
32.5°	47.9
35°	29.3
37.5°	18.6
40°	10.7
42.5°	2.7
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)