

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246711

Luminaire Tested: P3AS09R709024DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246711
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R709024DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R70 optic, 2400K CCT AND, 90CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 650.0 lumens
Efficiency: N/A
Efficacy: 58.6 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246711
CATALOG NUMBER: P3AS09R709024DE010 E3DL1MW

Luminous Intensity Polar Plot

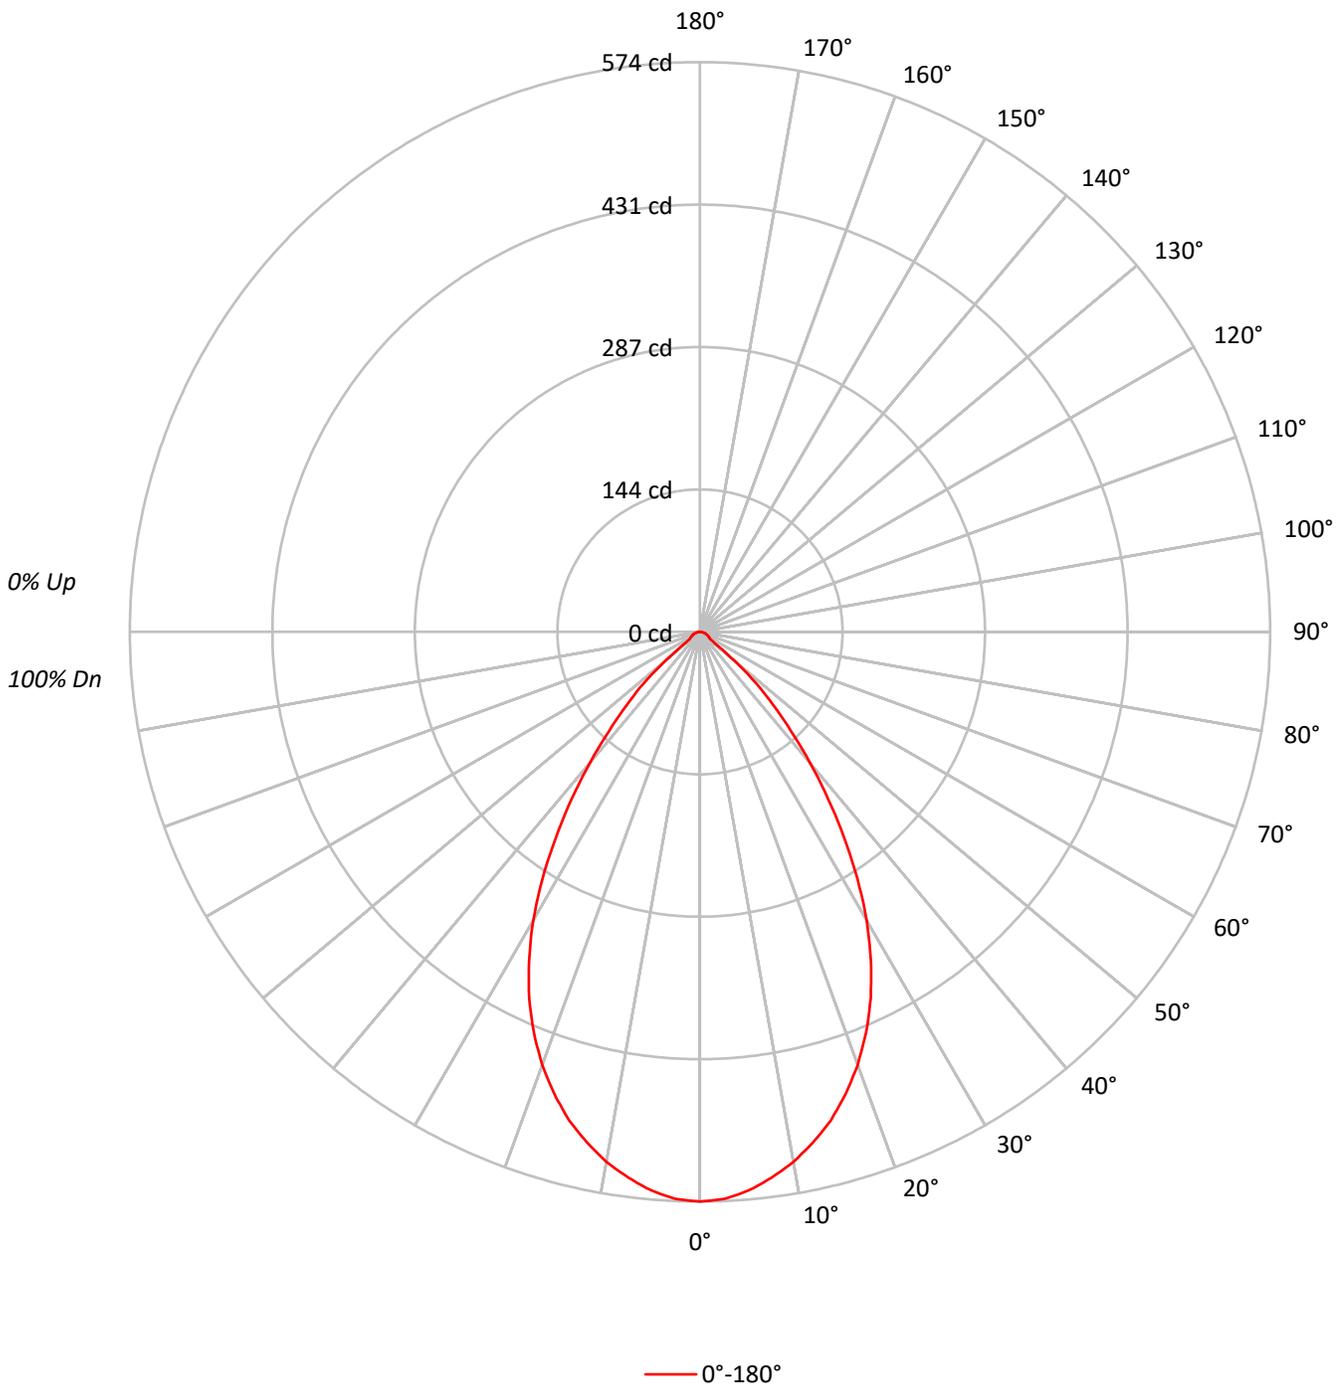



TEST NUMBER: P1246711
 CATALOG NUMBER: P3AS09R709024DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	82	89	85	81	86	83	80	84	81	79	77	77	77	77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55	55	55	55
8	75	65	58	53	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	125845
5°	124323
10°	120728
15°	115619
20°	108299
25°	98401
30°	85000
35°	67726
40°	49321
45°	32437
50°	15181
55°	4702
60°	4517
65°	4358
70°	4167
75°	4406
80°	4041
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 32437 cd/sqm



TEST NUMBER: P1246711
 CATALOG NUMBER: P3AS09R709024DE010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.2	8.2
10°-20°	142.5	21.9
20°-30°	185.3	28.5
30°-40°	157.2	24.2
40°-50°	81.1	12.5
50°-60°	15.6	2.4
60°-70°	8.5	1.3
70°-80°	5.2	0.8
80°-90°	1.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	381.0	58.6
0°-40°	538.2	82.8
0°-60°	634.9	97.7
0°-90°	650.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	650.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	574	
5°	565	53
15°	509	143
25°	407	185
35°	253	157
45°	105	81
55°	12	16
65°	8	8
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P1246711
CATALOG NUMBER: P3AS09R709024DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	573.9
2.5°	571.9
5°	564.8
7.5°	554.5
10°	542.2
12.5°	526.7
15°	509.3
17.5°	488.0
20°	464.1
22.5°	437.0
25°	406.7
27.5°	372.5
30°	335.7
32.5°	295.0
35°	253.0
37.5°	211.7
40°	172.3
42.5°	135.6
45°	104.6
47.5°	76.8
50°	44.5
52.5°	19.4
55°	12.3
57.5°	11.6
60°	10.3
62.5°	9.7
65°	8.4
67.5°	7.7
70°	6.5
72.5°	5.8
75°	5.2
77.5°	3.9
80°	3.2
82.5°	1.9
85°	1.3
87.5°	0.6
90°	0.0

(END OF REPORT)