

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1248143

Luminaire Tested: P3AS02R459027DE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1248143
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R459027DE010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 90CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 305.0 lumens
Efficiency: N/A
Efficacy: 84.7 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1248143
CATALOG NUMBER: P3AS02R459027DE010 E3CB1MW

Luminous Intensity Polar Plot

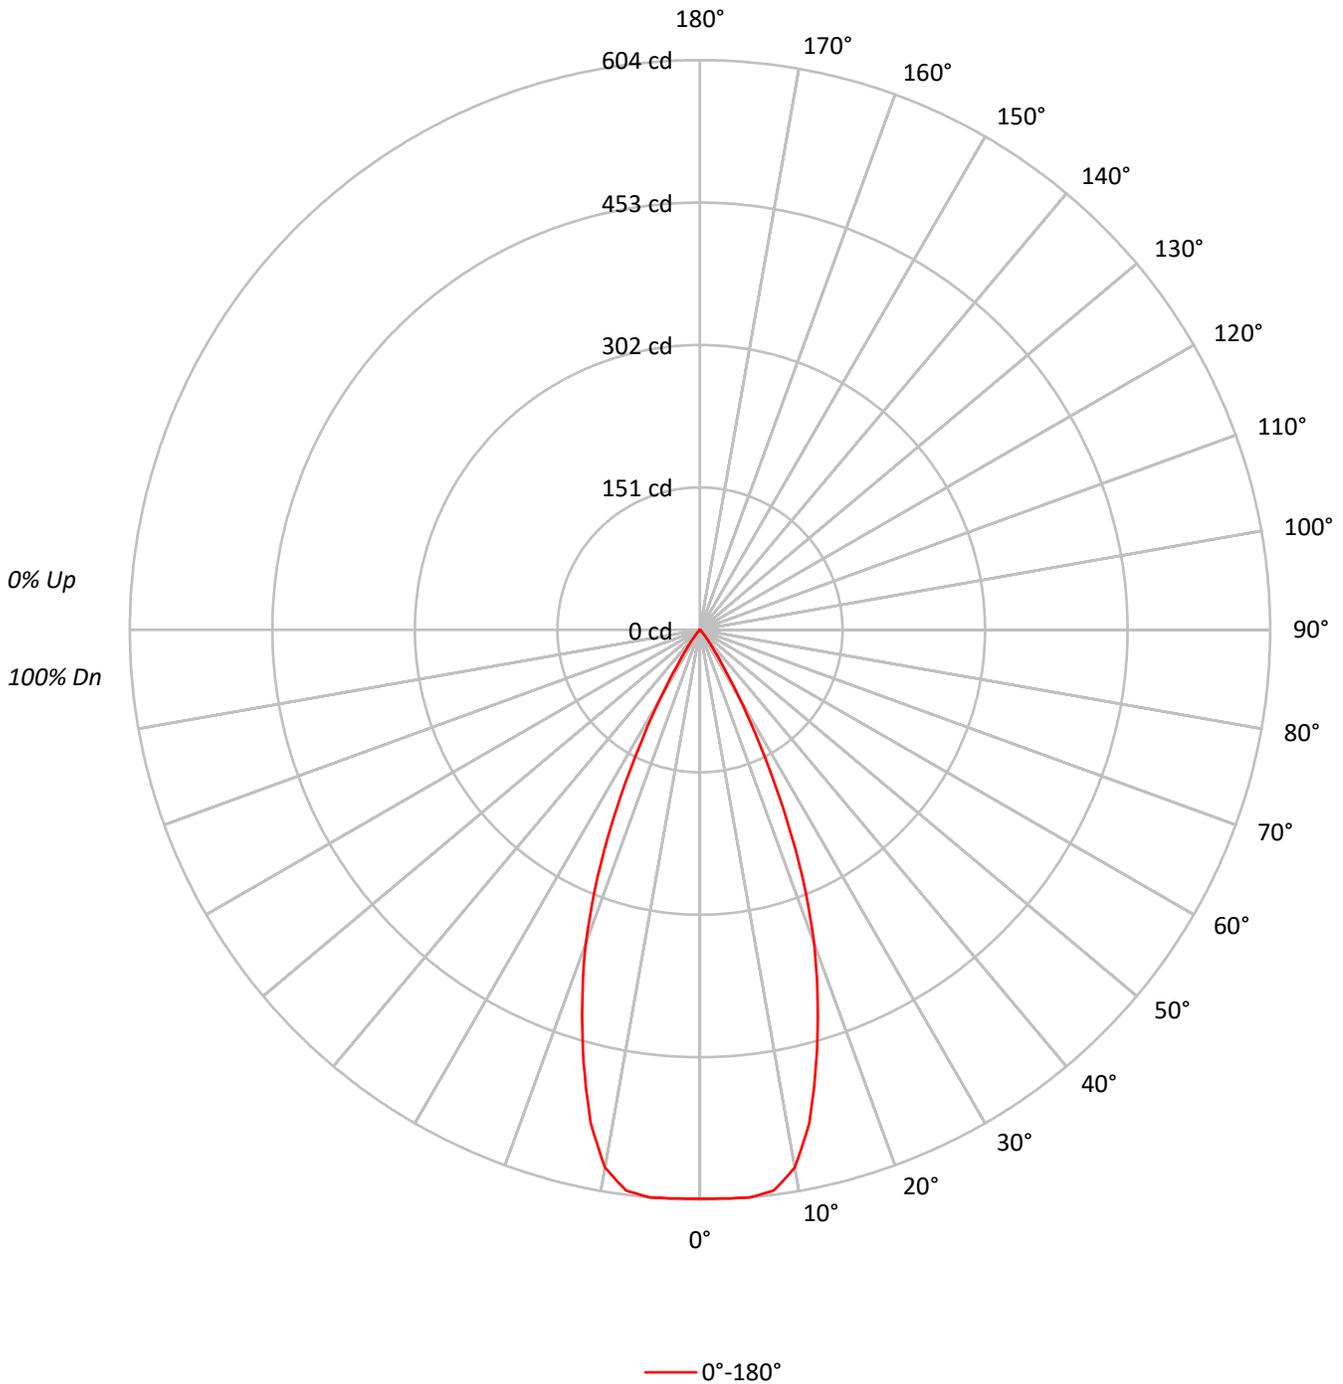



TEST NUMBER: P1248143

CATALOG NUMBER: P3AS02R459027DE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	96	93	91	94	91	89	92	90	88	86	86	86	86
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	88	86	84	82	82	82	82
5	98	91	86	82	96	90	85	82	88	84	81	87	83	81	85	82	80	79	79	79	79
6	94	87	82	78	93	86	81	78	85	80	77	83	80	77	82	79	76	75	75	75	75
7	90	83	78	74	89	82	78	74	81	77	74	80	76	74	79	76	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	132226
5°	132929
10°	128855
15°	107992
20°	82537
25°	50253
30°	20915
35°	6692
40°	2090
45°	434
50°	307
55°	344
60°	307
65°	363
70°	321
75°	424
80°	253
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 434 cd/sqm



TEST NUMBER: P1248143
 CATALOG NUMBER: P3AS02R459027DE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.0	18.7
10°-20°	130.7	42.9
20°-30°	94.1	30.9
30°-40°	19.6	6.4
40°-50°	1.8	0.6
50°-60°	0.7	0.2
60°-70°	0.6	0.2
70°-80°	0.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	281.8	92.4
0°-40°	301.4	98.8
0°-60°	303.9	99.6
0°-90°	305.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	305.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	603	
5°	604	57
15°	476	131
25°	208	94
35°	25	20
45°	1	2
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1248143
CATALOG NUMBER: P3AS02R459027DE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	603.0
2.5°	603.3
5°	603.9
7.5°	599.6
10°	578.7
12.5°	535.0
15°	475.7
17.5°	414.9
20°	353.7
22.5°	283.4
25°	207.7
27.5°	136.9
30°	82.6
32.5°	46.2
35°	25.0
37.5°	14.1
40°	7.3
42.5°	3.2
45°	1.4
47.5°	0.9
50°	0.9
52.5°	0.9
55°	0.9
57.5°	0.7
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.2
80°	0.2
82.5°	0.2
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)