

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250925

Luminaire Tested: P3AS02R559030DE010 E3DLP1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1250925  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R559030DE010 E3DLP1GPH  
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 90CRI , E3DLP1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 87.0 lumens  
Efficiency: N/A  
Efficacy: 24.2 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 3.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1250925  
CATALOG NUMBER: P3AS02R559030DE010 E3DLP1GPH

### Luminous Intensity Polar Plot

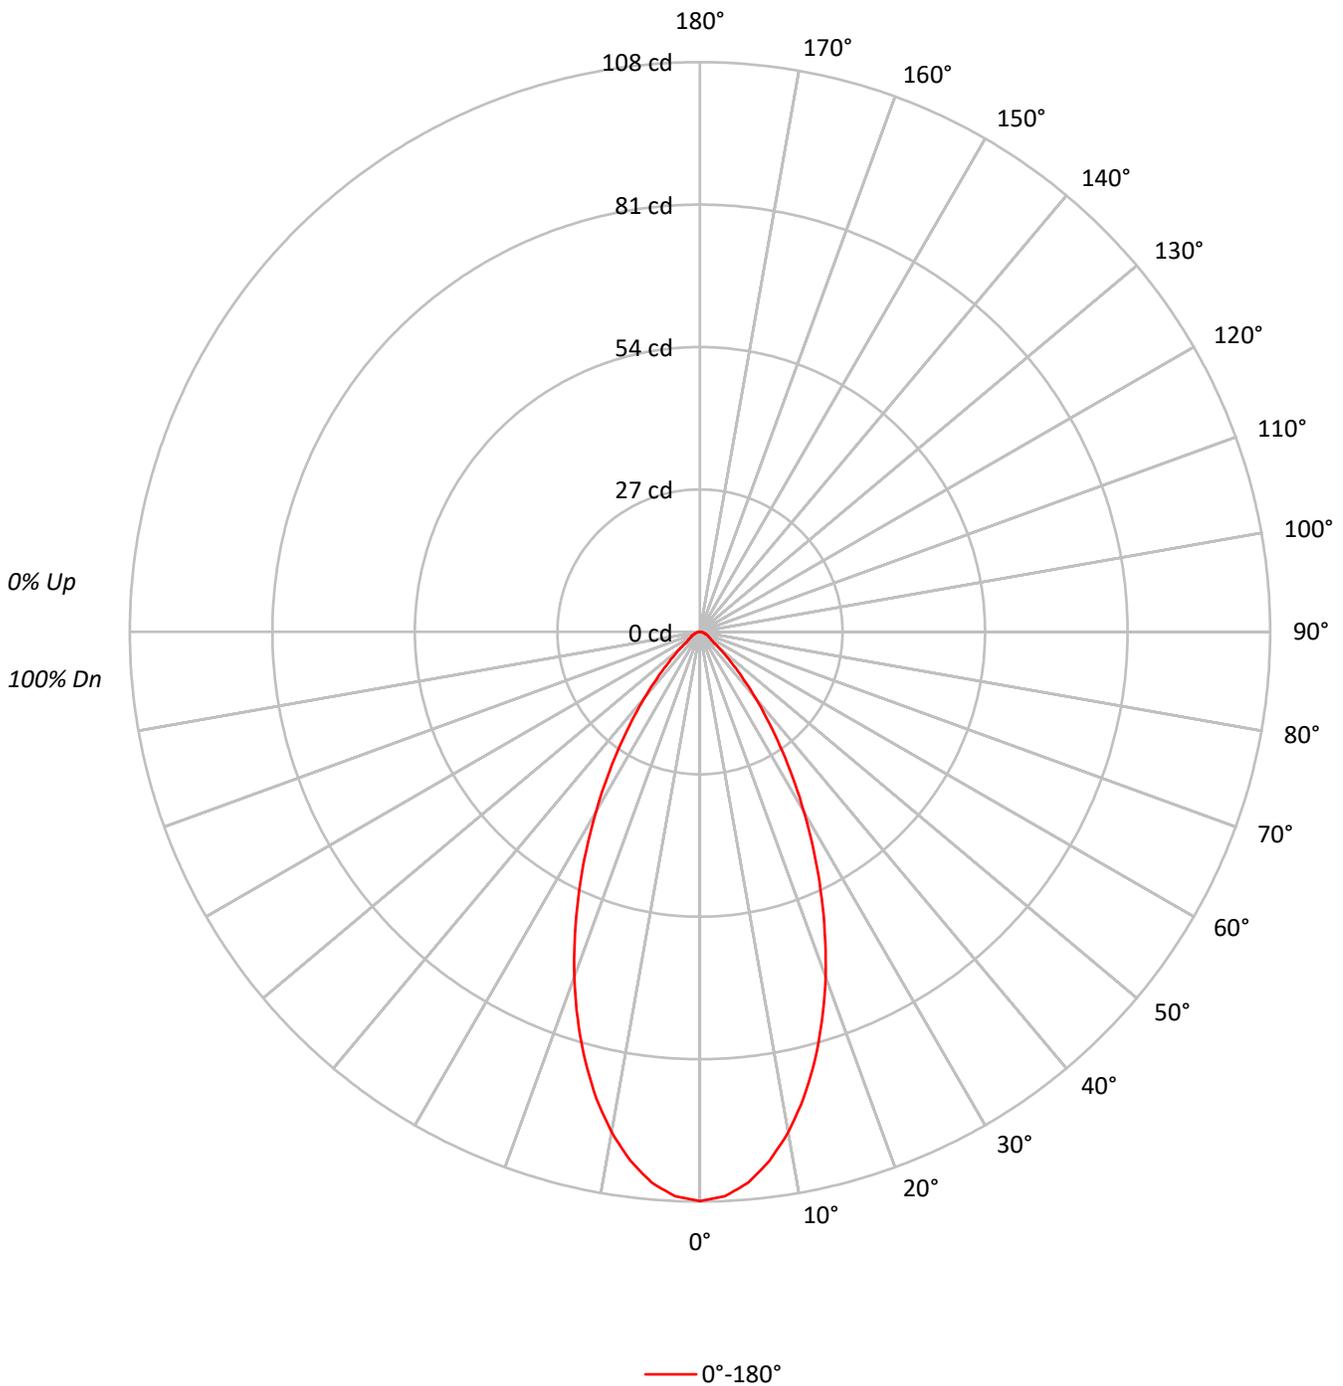



TEST NUMBER: P1250925  
 CATALOG NUMBER: P3AS02R559030DE010 E3DLP1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92				92
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79				79
4	96	88	82	77	94	87	81	77	84	80	76	82	78	75	80	77	74	73				73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67				67
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	67	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59				59
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55				55
9	74	64	58	54	73	63	58	54	62	57	53	62	57	53	61	56	53	52				52
10	70	60	54	51	69	60	54	50	59	54	50	58	54	50	58	53	50	49				49

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	23660
5°	23068
10°	21442
15°	19092
20°	16241
25°	13089
30°	9976
35°	7094
40°	4695
45°	2791
50°	1637
55°	994
60°	877
65°	830
70°	705
75°	593
80°	631
85°	503

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2791 cd/sqm



TEST NUMBER: P1250925  
 CATALOG NUMBER: P3AS02R559030DE010 E3DLP1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	9.7	11.2
10°-20°	23.3	26.8
20°-30°	24.7	28.4
30°-40°	16.7	19.2
40°-50°	7.3	8.4
50°-60°	2.6	3.0
60°-70°	1.5	1.8
70°-80°	0.8	0.9
80°-90°	0.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	57.8	66.4
0°-40°	74.4	85.6
0°-60°	84.4	97.0
0°-90°	87.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	87.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	108	
5°	105	10
15°	84	23
25°	54	25
35°	26	17
45°	9	7
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1250925  
CATALOG NUMBER: P3AS02R559030DE010 E3DLP1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	107.9
2.5°	107.1
5°	104.8
7.5°	101.1
10°	96.3
12.5°	90.6
15°	84.1
17.5°	77.0
20°	69.6
22.5°	61.8
25°	54.1
27.5°	46.6
30°	39.4
32.5°	32.6
35°	26.5
37.5°	21.0
40°	16.4
42.5°	12.3
45°	9.0
47.5°	6.6
50°	4.8
52.5°	3.3
55°	2.6
57.5°	2.4
60°	2.0
62.5°	1.8
65°	1.6
67.5°	1.3
70°	1.1
72.5°	1.0
75°	0.7
77.5°	0.6
80°	0.5
82.5°	0.4
85°	0.2
87.5°	0.1
90°	0.0

(END OF REPORT)