

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259000

Luminaire Tested: P3AS02R559050DE010 E3DLP1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1259000
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R559050DE010 E3DLP1LI
Description: 3in Adjustable LED luminaire with, R55 optic, 5000K CCT AND, 90CRI , E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 194.0 lumens
Efficiency: N/A
Efficacy: 53.9 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1259000
CATALOG NUMBER: P3AS02R559050DE010 E3DLP1LI

Luminous Intensity Polar Plot

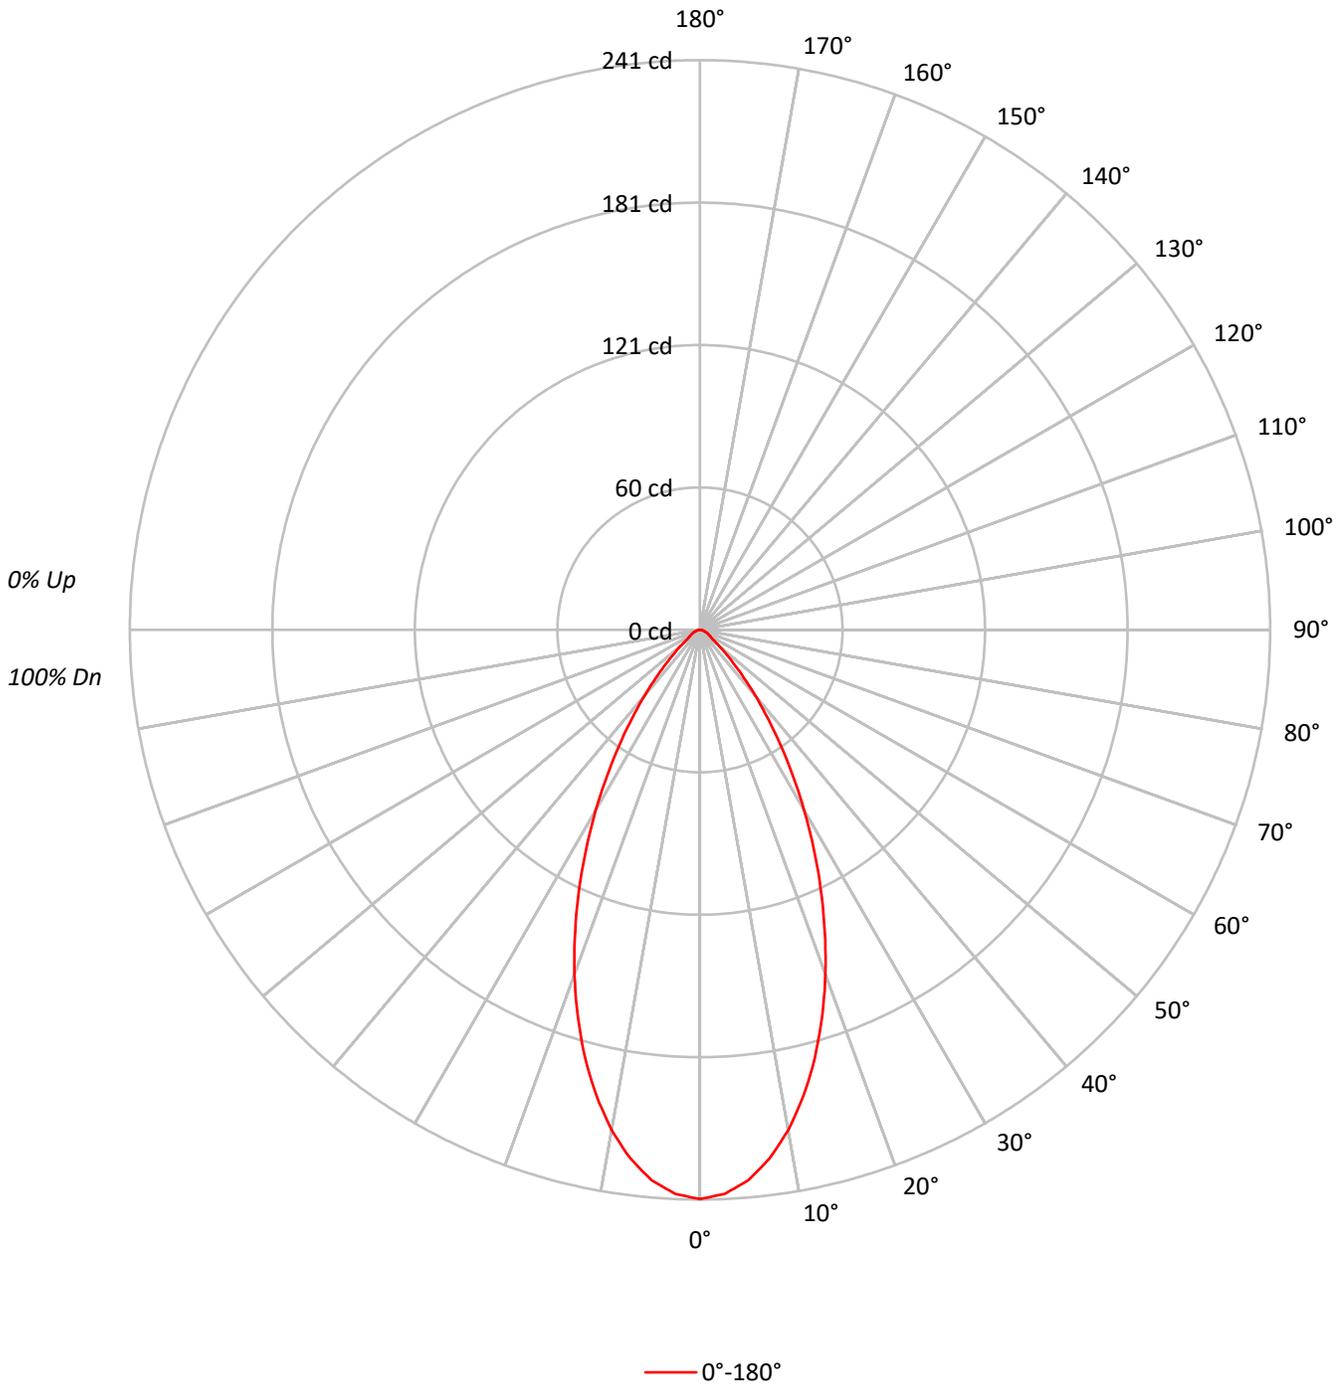



TEST NUMBER: P1259000
 CATALOG NUMBER: P3AS02R559050DE010 E3DLP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92				92
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79				79
4	96	88	82	77	94	87	81	77	84	80	76	82	78	75	80	77	74	73				73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67				67
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59				59
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55				55
9	74	64	58	54	73	63	58	54	62	57	53	62	57	53	61	56	53	52				52
10	70	60	54	51	69	60	54	50	59	54	50	58	54	50	58	53	50	49				49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	52781
5°	51442
10°	47828
15°	42588
20°	36193
25°	29203
30°	22282
35°	15847
40°	10448
45°	6202
50°	3650
55°	2256
60°	1974
65°	1816
70°	1539
75°	1356
80°	1389
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6202 cd/sqm



TEST NUMBER: P1259000
 CATALOG NUMBER: P3AS02R559050DE010 E3DLP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	21.7	11.2
10°-20°	52.0	26.8
20°-30°	55.1	28.4
30°-40°	37.2	19.2
40°-50°	16.3	8.4
50°-60°	5.9	3.0
60°-70°	3.4	1.8
70°-80°	1.8	0.9
80°-90°	0.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	128.8	66.4
0°-40°	166.0	85.6
0°-60°	188.2	97.0
0°-90°	194.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	194.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	241	
5°	234	22
15°	188	52
25°	121	55
35°	59	37
45°	20	16
55°	6	6
65°	4	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1259000
CATALOG NUMBER: P3AS02R559050DE010 E3DLP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	240.7
2.5°	238.8
5°	233.7
7.5°	225.5
10°	214.8
12.5°	202.0
15°	187.6
17.5°	171.6
20°	155.1
22.5°	137.8
25°	120.7
27.5°	103.9
30°	88.0
32.5°	72.8
35°	59.2
37.5°	46.9
40°	36.5
42.5°	27.5
45°	20.0
47.5°	14.7
50°	10.7
52.5°	7.5
55°	5.9
57.5°	5.3
60°	4.5
62.5°	4.0
65°	3.5
67.5°	2.9
70°	2.4
72.5°	2.1
75°	1.6
77.5°	1.3
80°	1.1
82.5°	0.8
85°	0.5
87.5°	0.3
90°	0.0

(END OF REPORT)