

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259638

Luminaire Tested: P3AS09R409050DE010 E3DLP1LI

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1259638  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R409050DE010 E3DLP1LI  
Description: 3in Adjustable LED luminaire with, R40 optic, 5000K CCT AND, 90CRI , E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 587.0 lumens  
Efficiency: N/A  
Efficacy: 52.9 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1259638  
CATALOG NUMBER: P3AS09R409050DE010 E3DLP1LI

### Luminous Intensity Polar Plot

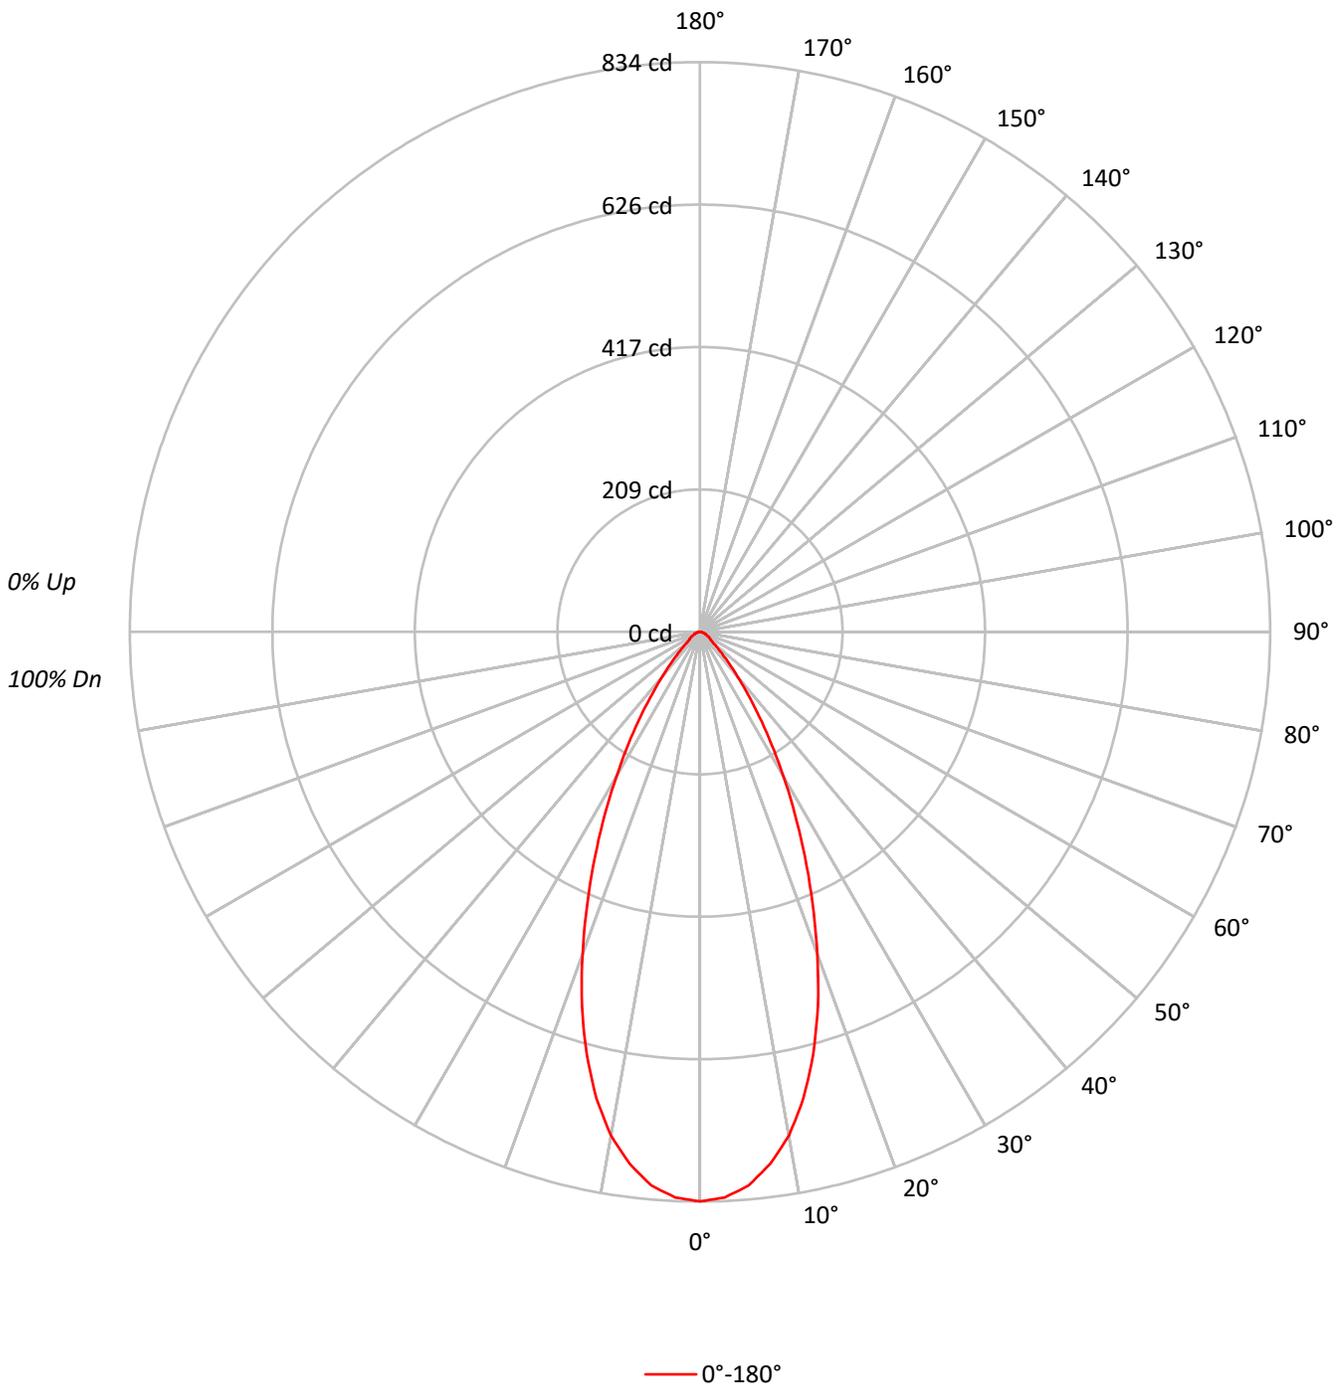



TEST NUMBER: P1259638  
 CATALOG NUMBER: P3AS09R409050DE010 E3DLP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93
2	107	102	98	95	105	101	97	93	97	94	91	94	92	89	92	89	88	86				86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80				80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74				74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69				69
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65				65
7	83	74	68	64	82	73	68	63	72	67	63	71	66	63	70	66	62	61				61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58				58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54				54
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51				51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	182770
5°	179088
10°	166730
15°	145313
20°	117120
25°	87779
30°	61706
35°	40422
40°	24474
45°	14637
50°	8733
55°	7034
60°	6315
65°	5396
70°	5129
75°	4067
80°	4041
85°	4026

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14637 cd/sqm



TEST NUMBER: P1259638  
 CATALOG NUMBER: P3AS09R409050DE010 E3DLP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	75.5	12.9
10°-20°	176.3	30.0
20°-30°	166.1	28.3
30°-40°	96.1	16.4
40°-50°	38.3	6.5
50°-60°	17.0	2.9
60°-70°	10.5	1.8
70°-80°	5.5	0.9
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	418.0	71.2
0°-40°	514.1	87.6
0°-60°	569.3	97.0
0°-90°	587.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	587.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	834	
5°	814	76
15°	640	176
25°	363	166
35°	151	96
45°	47	38
55°	18	17
65°	10	10
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1259638  
CATALOG NUMBER: P3AS09R409050DE010 E3DLP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	833.5
2.5°	828.7
5°	813.6
7.5°	785.6
10°	748.8
12.5°	699.3
15°	640.1
17.5°	573.8
20°	501.9
22.5°	430.0
25°	362.8
27.5°	300.5
30°	243.7
32.5°	194.2
35°	151.0
37.5°	114.3
40°	85.5
42.5°	63.9
45°	47.2
47.5°	34.4
50°	25.6
52.5°	20.8
55°	18.4
57.5°	16.8
60°	14.4
62.5°	12.0
65°	10.4
67.5°	8.8
70°	8.0
72.5°	6.4
75°	4.8
77.5°	4.0
80°	3.2
82.5°	2.4
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)