

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261666

Luminaire Tested: P3AS02R609727DE010 E3DLP1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261666
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R609727DE010 E3DLP1H
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 97CRI , E3DLP1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 148.0 lumens
Efficiency: N/A
Efficacy: 41.1 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261666
CATALOG NUMBER: P3AS02R609727DE010 E3DLP1H

Luminous Intensity Polar Plot

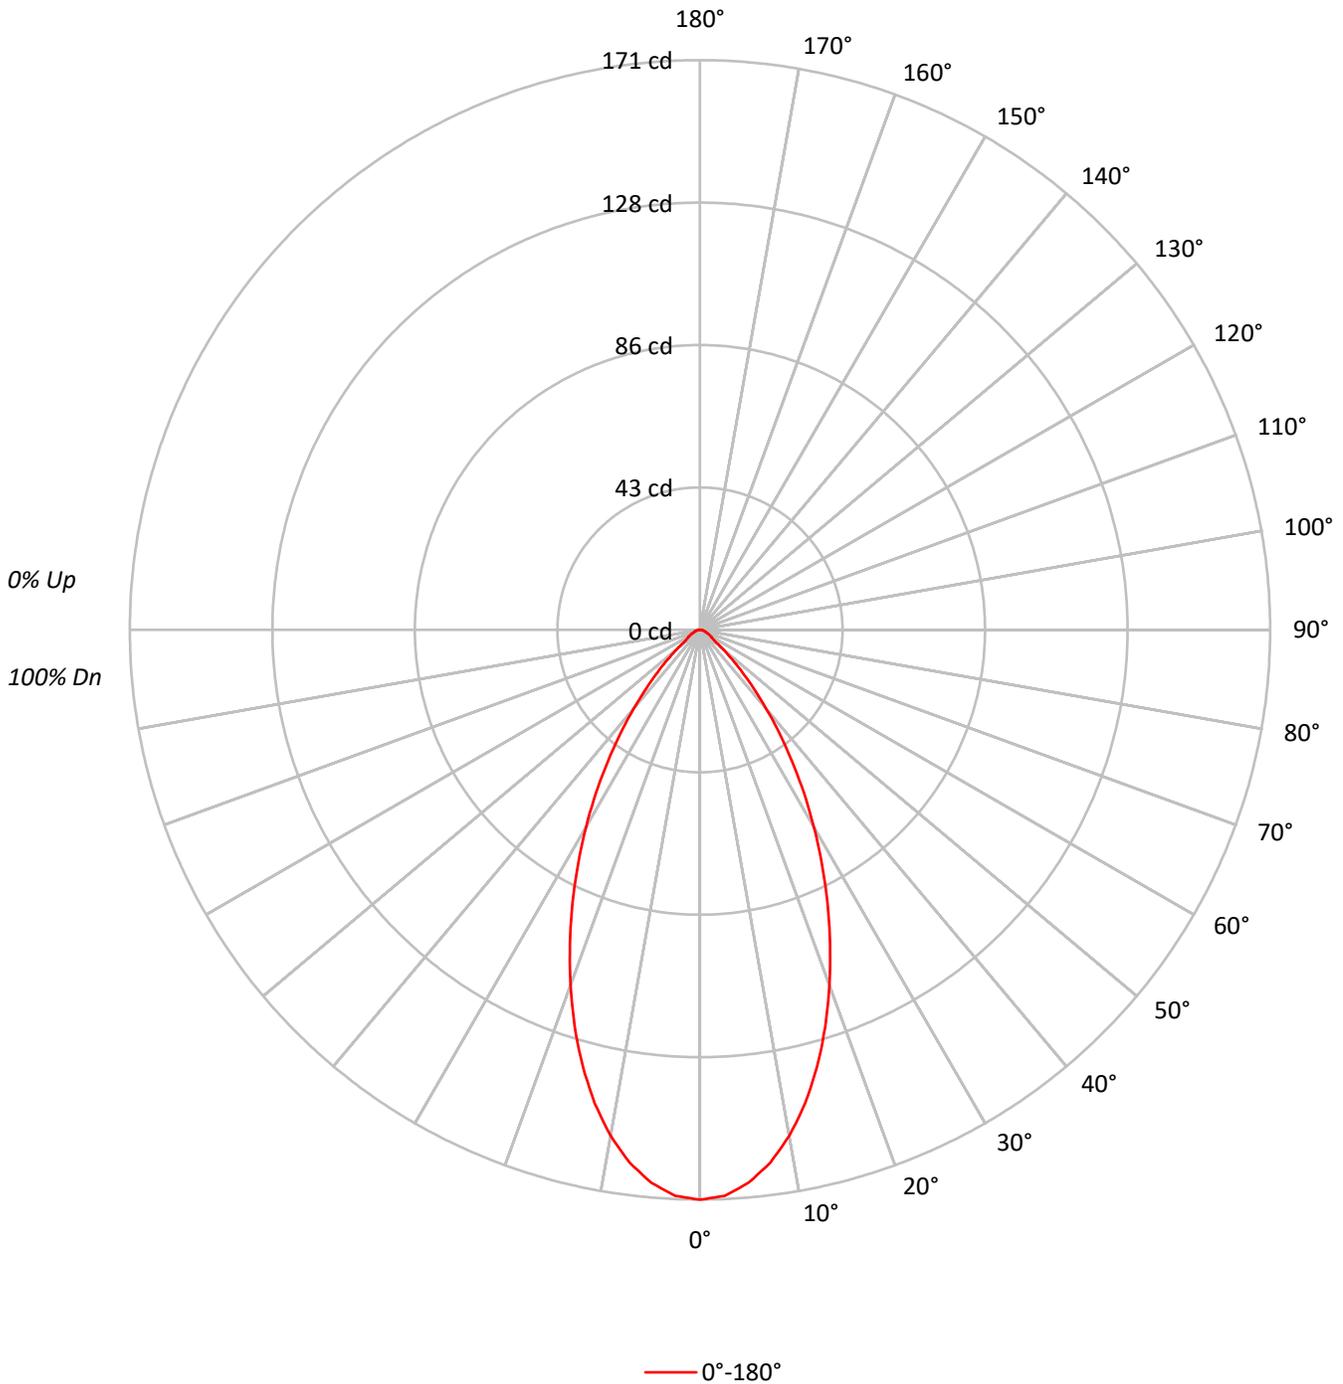



TEST NUMBER: P1261666
 CATALOG NUMBER: P3AS02R609727DE010 E3DLP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92				92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85				85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72				72
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66				66
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	67	63	62				62
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	58				58
8	77	67	60	56	75	66	60	56	65	60	56	64	59	55	63	58	55	54				54
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50				50
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47				47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	37497
5°	36672
10°	34335
15°	30806
20°	26486
25°	21896
30°	17294
35°	12849
40°	8845
45°	5551
50°	3036
55°	1797
60°	1623
65°	1349
70°	1154
75°	1186
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5551 cd/sqm



TEST NUMBER: P1261666
 CATALOG NUMBER: P3AS02R609727DE010 E3DLP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.5	10.5
10°-20°	37.7	25.5
20°-30°	41.3	27.9
30°-40°	30.1	20.4
40°-50°	14.2	9.6
50°-60°	4.7	3.2
60°-70°	2.6	1.8
70°-80°	1.4	0.9
80°-90°	0.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	94.5	63.9
0°-40°	124.6	84.2
0°-60°	143.5	97.0
0°-90°	148.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	148.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	171	
5°	167	16
15°	136	38
25°	90	41
35°	48	30
45°	18	14
55°	5	5
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1261666
CATALOG NUMBER: P3AS02R609727DE010 E3DLP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	171.0
2.5°	170.0
5°	166.6
7.5°	161.3
10°	154.2
12.5°	145.6
15°	135.7
17.5°	124.9
20°	113.5
22.5°	101.9
25°	90.5
27.5°	79.1
30°	68.3
32.5°	58.0
35°	48.0
37.5°	39.1
40°	30.9
42.5°	23.8
45°	17.9
47.5°	13.0
50°	8.9
52.5°	5.9
55°	4.7
57.5°	4.1
60°	3.7
62.5°	3.1
65°	2.6
67.5°	2.2
70°	1.8
72.5°	1.6
75°	1.4
77.5°	1.0
80°	0.8
82.5°	0.6
85°	0.4
87.5°	0.2
90°	0.0

(END OF REPORT)