

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263085

Luminaire Tested: P3AS17R409727DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263085
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R409727DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R40 optic, 2700K CCT AND, 97CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1509.0 lumens
Efficiency: N/A
Efficacy: 71.2 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263085
CATALOG NUMBER: P3AS17R409727DE010 E3D1WMH

Luminous Intensity Polar Plot

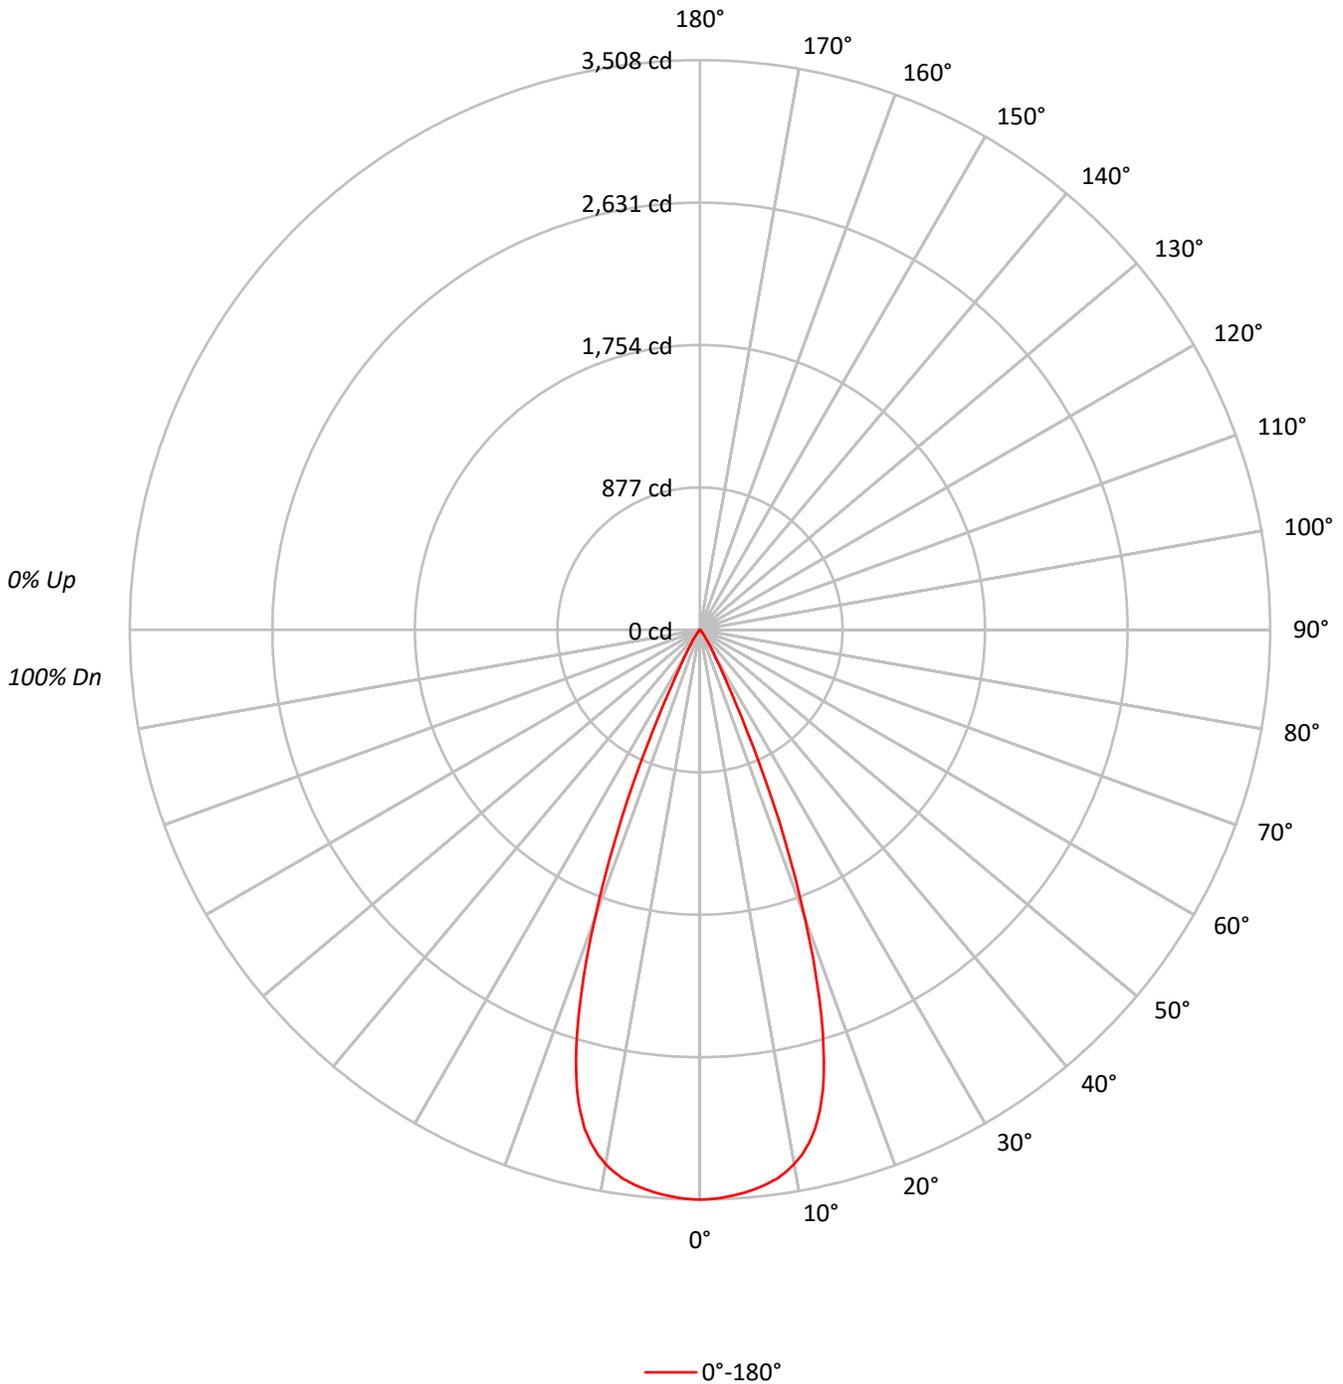



TEST NUMBER: P1263085
 CATALOG NUMBER: P3AS17R409727DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	96			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	96	95	94	92			
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	93	91	90	88			
4	103	97	93	90	101	96	92	89	94	91	88	92	89	87	90	88	86	85			
5	99	93	89	85	98	92	88	85	91	87	84	89	86	84	88	85	83	82			
6	96	89	85	81	95	89	84	81	87	83	81	86	83	80	85	82	80	79			
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	76			
8	90	83	78	75	89	82	78	75	81	77	75	80	77	74	79	76	74	73			
9	87	80	75	72	86	79	75	72	78	75	72	78	74	72	77	74	71	70			
10	84	77	72	70	83	77	72	69	76	72	69	75	72	69	74	71	69	68			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	769171
5°	763612
10°	743629
15°	664272
20°	440455
25°	165010
30°	44133
35°	17239
40°	6212
45°	2946
50°	887
55°	421
60°	219
65°	259
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2946 cd/sqm



TEST NUMBER: P1263085
 CATALOG NUMBER: P3AS17R409727DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	327.4	21.7
10°-20°	775.3	51.4
20°-30°	351.6	23.3
30°-40°	45.6	3.0
40°-50°	7.9	0.5
50°-60°	0.9	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1454.3	96.4
0°-40°	1499.8	99.4
0°-60°	1508.7	100.0
0°-90°	1509.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1509.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3508	
5°	3469	327
15°	2926	775
25°	682	352
35°	64	46
45°	10	8
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1263085
CATALOG NUMBER: P3AS17R409727DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3507.7
1°	3505.6
2°	3500.3
3°	3492.4
4°	3482.3
5°	3469.1
6°	3453.8
7°	3434.8
8°	3411.6
9°	3379.9
10°	3339.7
11°	3292.7
12°	3229.8
13°	3152.2
14°	3050.8
15°	2926.1
16°	2767.1
17°	2585.9
18°	2368.2
19°	2138.4
20°	1887.5
21°	1636.6
22°	1389.3
23°	1143.2
24°	901.2
25°	682.0
26°	505.0
27°	369.8
28°	277.9
29°	216.1
30°	174.3
31°	144.2
32°	120.4
32.5°	109.9
33°	99.3
34°	80.8
35°	64.4
36°	50.7
37°	40.1
37.5°	35.9
38°	31.7
39°	26.4
40°	21.7
42.5°	14.3
45°	9.5



TEST NUMBER: P1263085
CATALOG NUMBER: P3AS17R409727DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	5.8
50°	2.6
52.5°	1.1
55°	1.1
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.5
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)