

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264201

Luminaire Tested: P3AS05R159730DE010 E3PHLP1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1264201  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R159730DE010 E3PHLP1MW  
Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 97CRI , E3PHLP1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 209.0 lumens  
Efficiency: N/A  
Efficacy: 29.0 lumens/watt  
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.6  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1264201  
CATALOG NUMBER: P3AS05R159730DE010 E3PHLP1MW

### Luminous Intensity Polar Plot

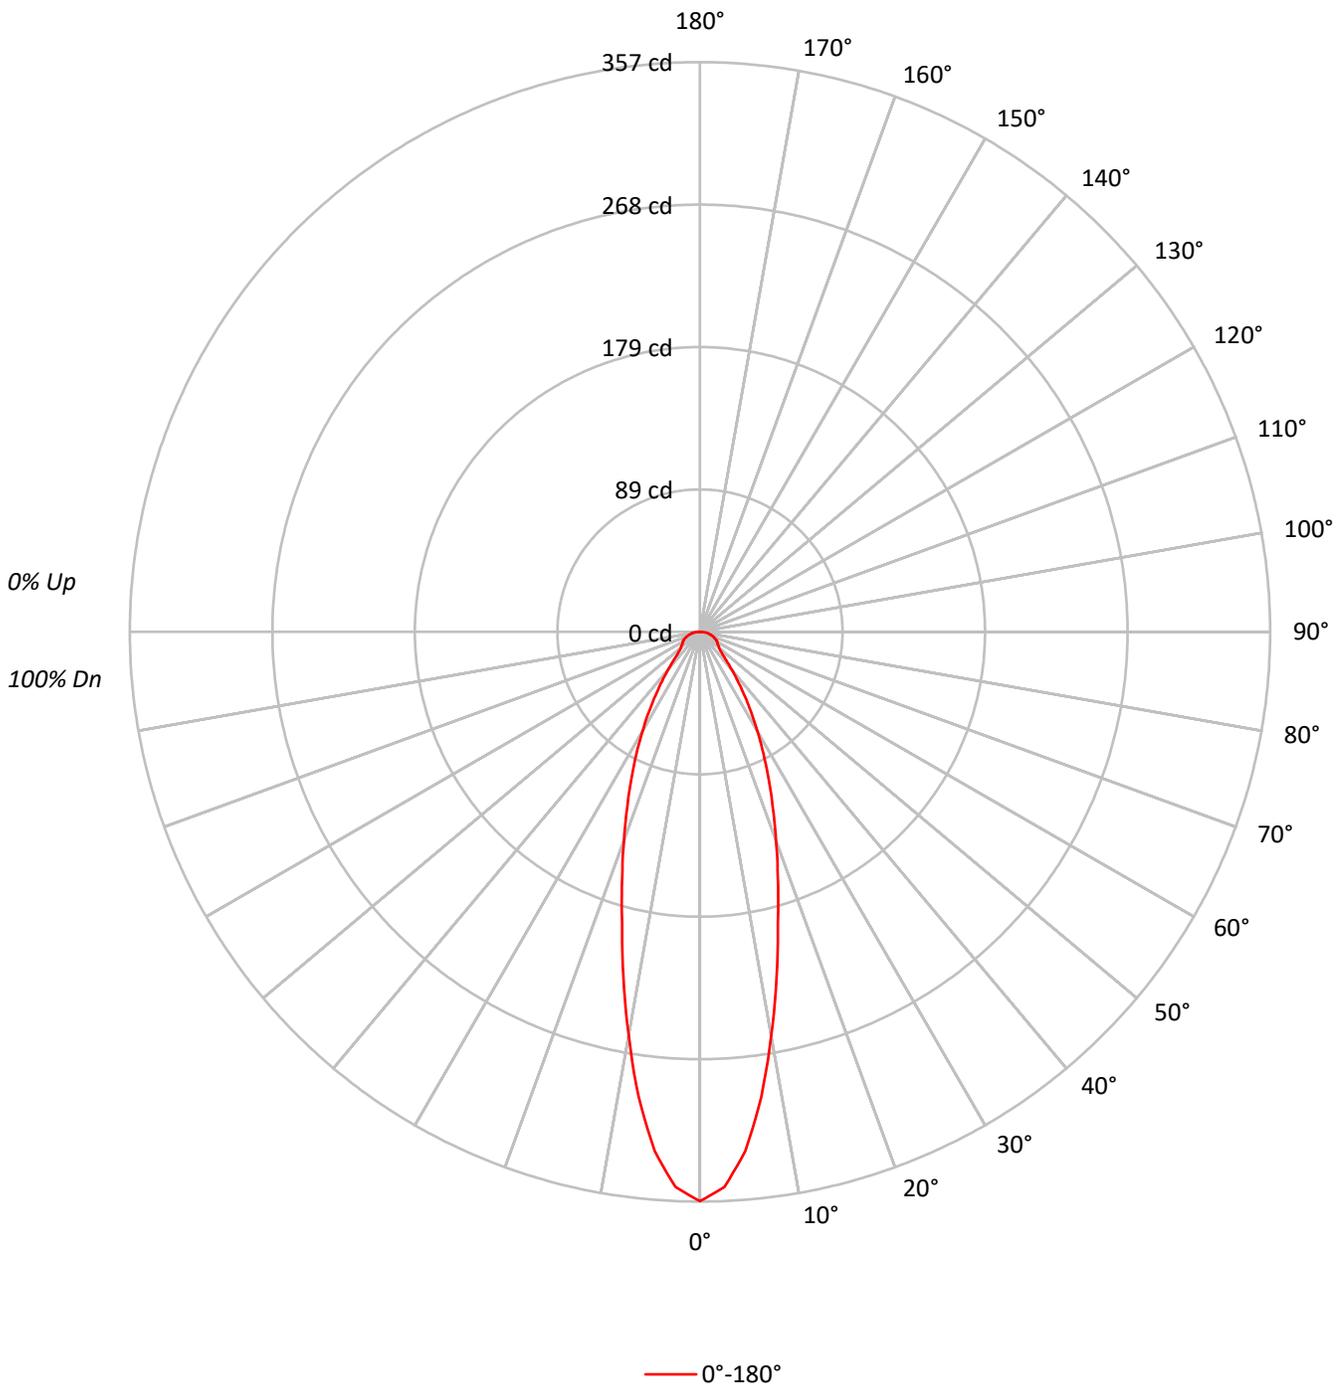



TEST NUMBER: P1264201  
 CATALOG NUMBER: P3AS05R159730DE010 E3PHLP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	95	93	92	90	90	90	90
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81	81	81	81
3	99	91	85	80	96	89	84	80	87	82	78	84	80	77	82	79	76	74	74	74	74
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68	68	68	68
5	88	78	72	67	86	77	71	67	76	70	66	74	69	65	72	68	65	63	63	63	63
6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	59	59	59	59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55	55	55	55
8	75	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	52	52	52	52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49	49	49	49
10	69	59	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	46	46	46	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	78217
5°	71825
10°	57225
15°	42770
20°	32483
25°	24582
30°	18205
35°	13010
40°	8902
45°	6233
50°	5288
55°	5199
60°	5394
65°	5707
70°	5834
75°	6015
80°	6566
85°	6542

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 82.5°  
 Luminance: 7560 cd/sqm



TEST NUMBER: P1264201  
 CATALOG NUMBER: P3AS05R159730DE010 E3PHLP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	28.9	13.8
10°-20°	52.8	25.3
20°-30°	46.8	22.4
30°-40°	30.7	14.7
40°-50°	16.4	7.8
50°-60°	12.4	5.9
60°-70°	10.7	5.1
70°-80°	7.4	3.5
80°-90°	3.0	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	128.6	61.5
0°-40°	159.2	76.2
0°-60°	188.0	89.9
0°-90°	209.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	209.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	357	
5°	326	29
15°	188	53
25°	102	47
35°	49	31
45°	20	16
55°	14	12
65°	11	11
75°	7	7
85°	3	3
90°	0	



TEST NUMBER: P1264201  
CATALOG NUMBER: P3AS05R159730DE010 E3PHLP1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	356.7
2.5°	348.3
5°	326.3
7.5°	293.9
10°	257.0
12.5°	221.4
15°	188.4
17.5°	161.9
20°	139.2
22.5°	119.1
25°	101.6
27.5°	86.1
30°	71.9
32.5°	59.6
35°	48.6
37.5°	38.8
40°	31.1
42.5°	24.6
45°	20.1
47.5°	17.5
50°	15.5
52.5°	14.9
55°	13.6
57.5°	12.9
60°	12.3
62.5°	11.7
65°	11.0
67.5°	9.7
70°	9.1
72.5°	7.8
75°	7.1
77.5°	5.8
80°	5.2
82.5°	4.5
85°	2.6
87.5°	1.3
90°	0.0

(END OF REPORT)