

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265975

Luminaire Tested: P3AS20R659730D010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265975
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R659730D010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R65 optic, 3000K CCT AND, 97CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1875.0 lumens
Efficiency: N/A
Efficacy: 65.1 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265975
CATALOG NUMBER: P3AS20R659730D010 E3CB1MW

Luminous Intensity Polar Plot

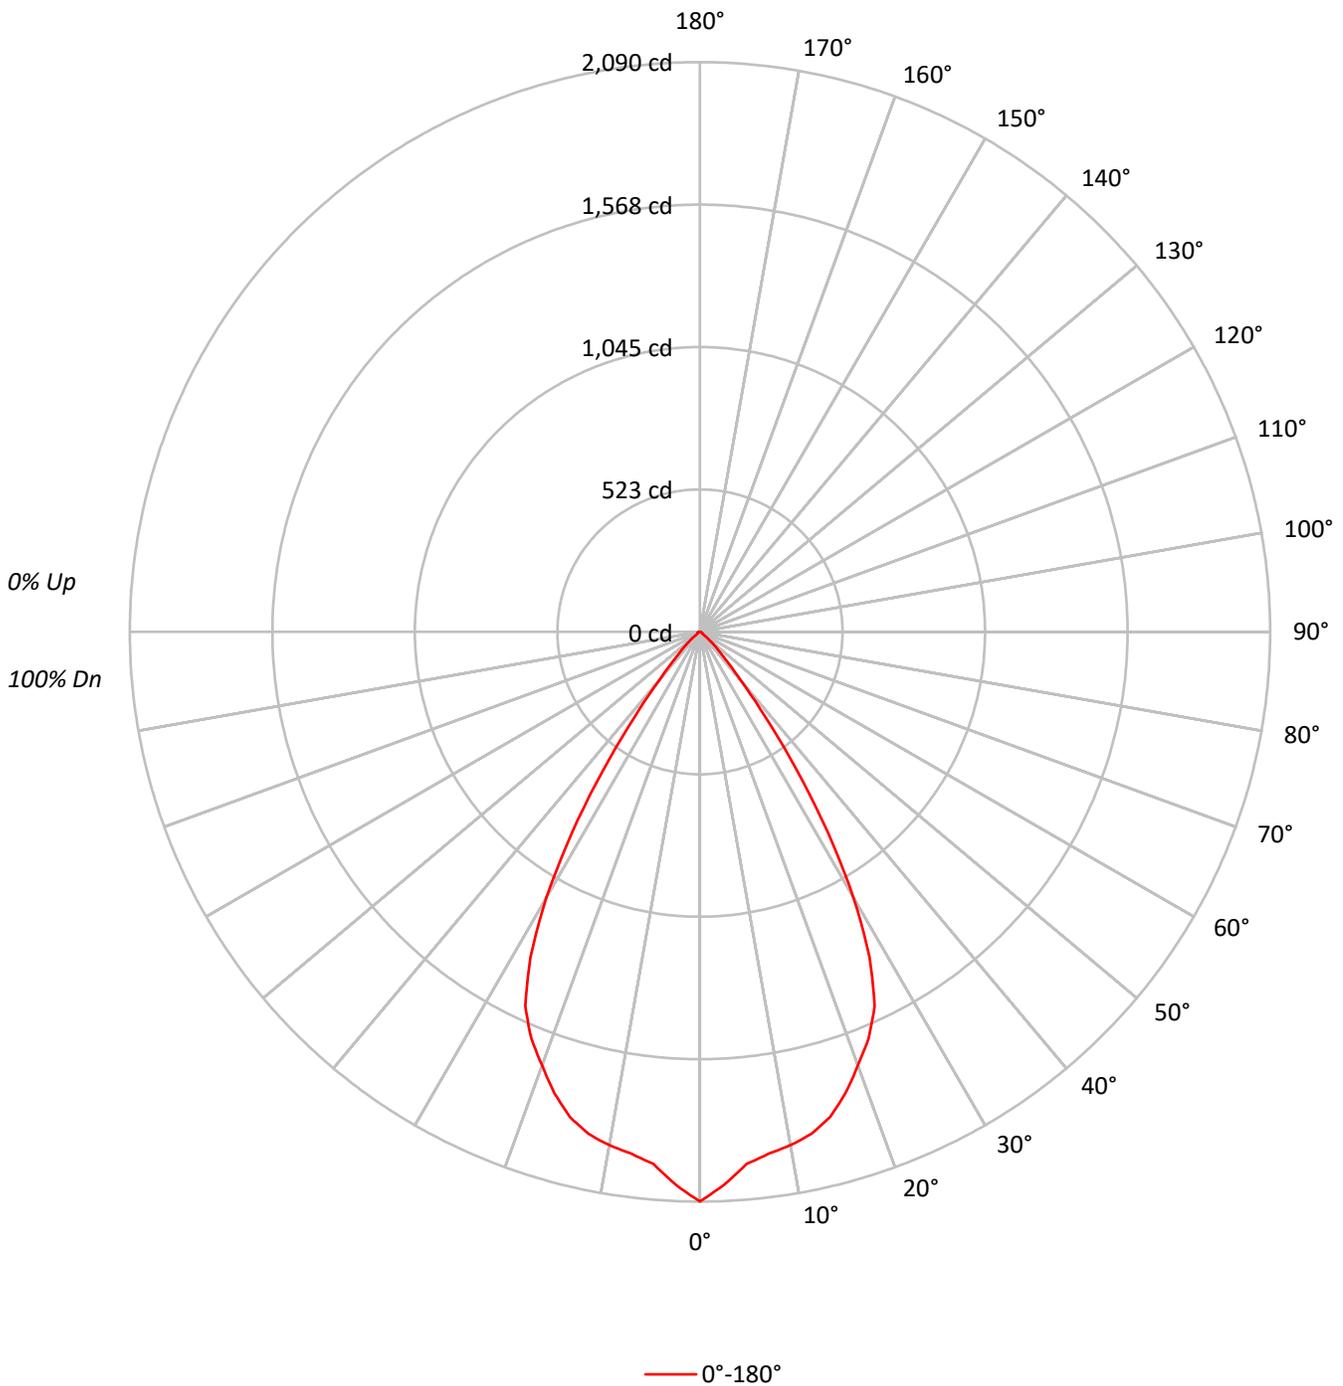



TEST NUMBER: P1265975
 CATALOG NUMBER: P3AS20R659730D010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94	94	94	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87	87	87	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81	81	81	81
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	75	75	75	75
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70	70	70	70
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	80	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	63	57	53	71	62	57	53	61	56	53	60	56	53	60	55	52	51	51	51	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	458209
5°	431256
10°	425777
15°	418254
20°	394904
25°	366529
30°	284905
35°	164818
40°	66410
45°	30577
50°	11906
55°	4626
60°	3991
65°	3943
70°	3911
75°	3813
80°	3788
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30577 cd/sqm



TEST NUMBER: P1265975
 CATALOG NUMBER: P3AS20R659730D010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.2	9.9
10°-20°	514.5	27.4
20°-30°	673.5	35.9
30°-40°	390.1	20.8
40°-50°	83.5	4.5
50°-60°	13.6	0.7
60°-70°	7.5	0.4
70°-80°	4.4	0.2
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1374.3	73.3
0°-40°	1764.4	94.1
0°-60°	1861.5	99.3
0°-90°	1875.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1875.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2090	
5°	1959	186
15°	1842	515
25°	1515	674
35°	616	390
45°	99	84
55°	12	14
65°	8	8
75°	4	4
85°	2	2
90°	0	



TEST NUMBER: P1265975
CATALOG NUMBER: P3AS20R659730D010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2089.6
2.5°	2030.5
5°	1959.2
7.5°	1930.4
10°	1912.2
12.5°	1886.4
15°	1842.4
17.5°	1774.2
20°	1692.3
22.5°	1615.0
25°	1514.9
27.5°	1346.6
30°	1125.2
32.5°	871.9
35°	615.7
37.5°	389.7
40°	232.0
42.5°	145.6
45°	98.6
47.5°	63.7
50°	34.9
52.5°	16.7
55°	12.1
57.5°	10.6
60°	9.1
62.5°	9.1
65°	7.6
67.5°	6.1
70°	6.1
72.5°	4.5
75°	4.5
77.5°	3.0
80°	3.0
82.5°	1.5
85°	1.5
87.5°	1.5
90°	0.0

(END OF REPORT)