

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267964

Luminaire Tested: P3AS17R609735DE010 E3DLD1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267964
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R609735DE010 E3DLD1LI
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 97CRI , E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 989.0 lumens
Efficiency: N/A
Efficacy: 46.6 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267964
CATALOG NUMBER: P3AS17R609735DE010 E3DLD1LI

Luminous Intensity Polar Plot

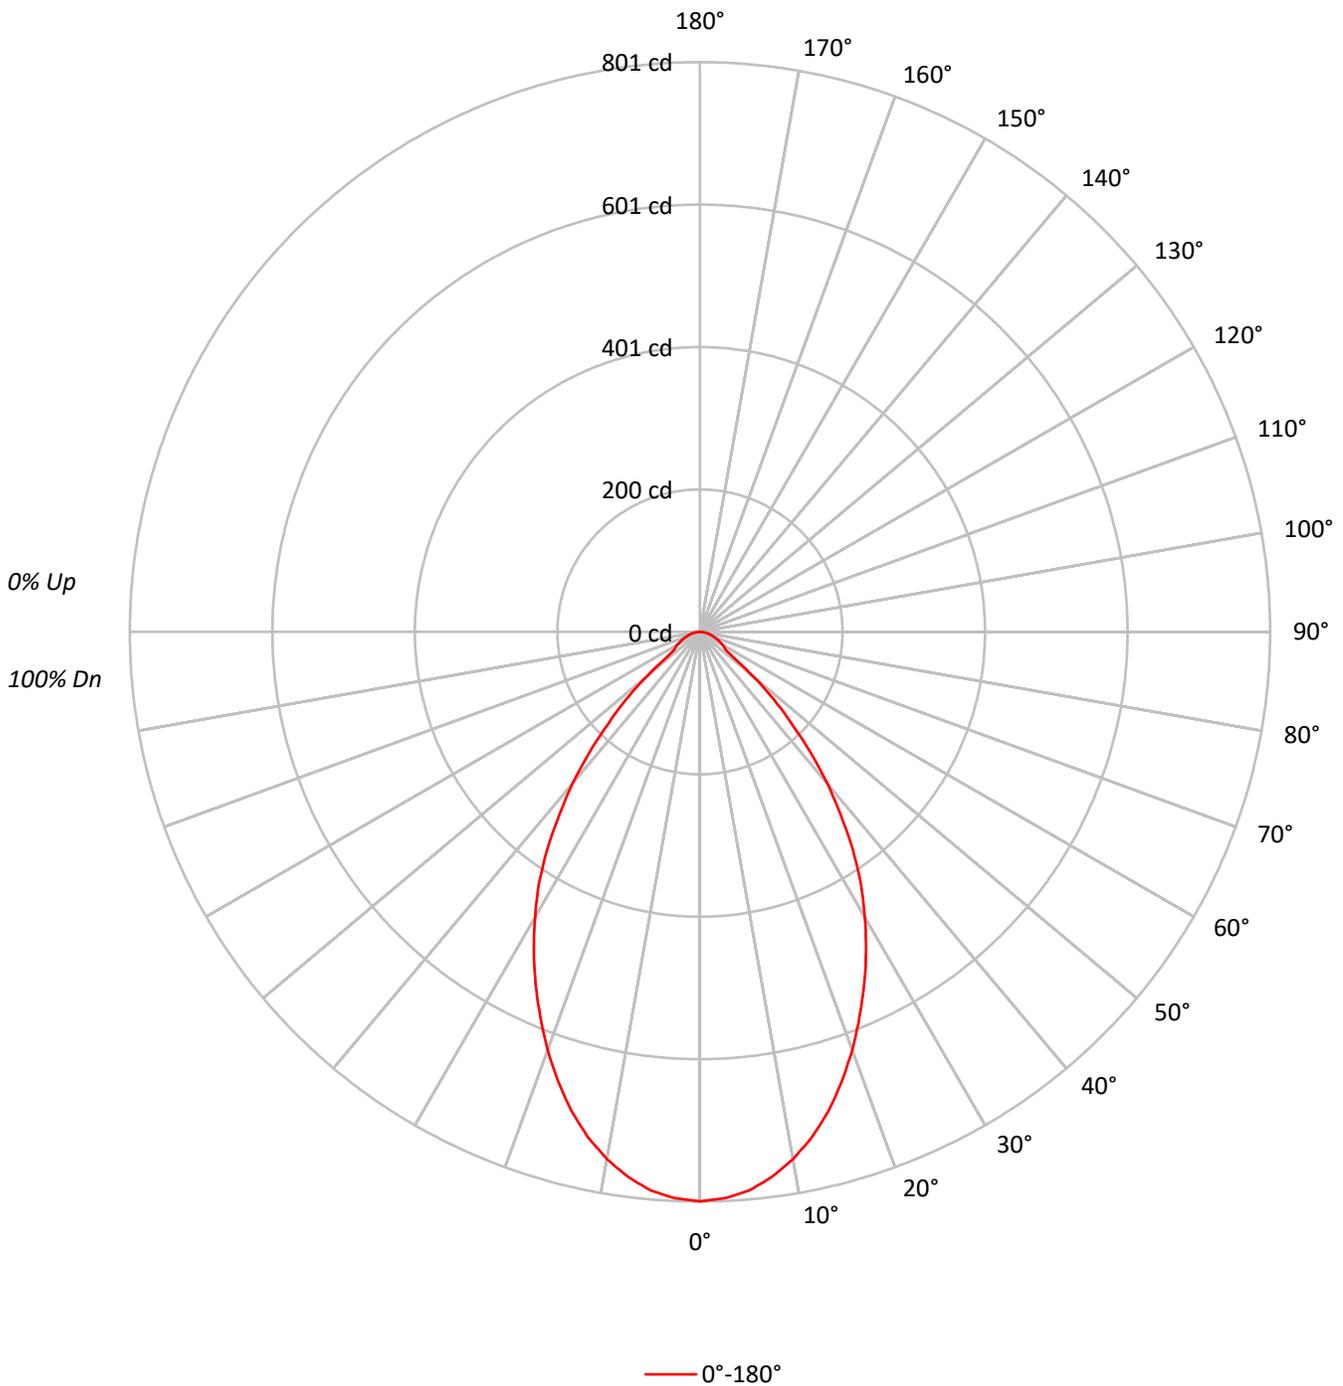



TEST NUMBER: P1267964
 CATALOG NUMBER: P3AS17R609735DE010 E3DLD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82			82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74			74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67			67
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61			61
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			51
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47			47
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44			44
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41			41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	175556
5°	173585
10°	167577
15°	158321
20°	145939
25°	132153
30°	117309
35°	100251
40°	79721
45°	56223
50°	33568
55°	16974
60°	16314
65°	14943
70°	13848
75°	13217
80°	12123
85°	9057

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 56223 cd/sqm



TEST NUMBER: P1267964
 CATALOG NUMBER: P3AS17R609735DE010 E3DLD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.1	7.5
10°-20°	194.9	19.7
20°-30°	250.3	25.3
30°-40°	232.0	23.5
40°-50°	141.3	14.3
50°-60°	47.1	4.8
60°-70°	28.6	2.9
70°-80°	16.1	1.6
80°-90°	4.6	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	519.3	52.5
0°-40°	751.3	76.0
0°-60°	939.6	95.0
0°-90°	989.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	989.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	801	
5°	789	74
15°	697	195
25°	546	250
35°	374	232
45°	181	141
55°	44	47
65°	29	29
75°	16	16
85°	4	5
90°	0	



TEST NUMBER: P1267964
CATALOG NUMBER: P3AS17R609735DE010 E3DLD1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	800.6
2.5°	797.0
5°	788.6
7.5°	773.0
10°	752.6
12.5°	727.4
15°	697.4
17.5°	662.6
20°	625.4
22.5°	585.8
25°	546.2
27.5°	505.3
30°	463.3
32.5°	421.3
35°	374.5
37.5°	325.3
40°	278.5
42.5°	229.3
45°	181.3
47.5°	140.4
50°	98.4
52.5°	58.8
55°	44.4
57.5°	40.8
60°	37.2
62.5°	32.4
65°	28.8
67.5°	25.2
70°	21.6
72.5°	18.0
75°	15.6
77.5°	12.0
80°	9.6
82.5°	6.0
85°	3.6
87.5°	2.4
90°	0.0

(END OF REPORT)