

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268360

Luminaire Tested: P3AS20R659735D010 E3D1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268360
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R659735D010 E3D1MW
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 97CRI , E3D1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1948.0 lumens
Efficiency: N/A
Efficacy: 67.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268360
CATALOG NUMBER: P3AS20R659735D010 E3D1MW

Luminous Intensity Polar Plot

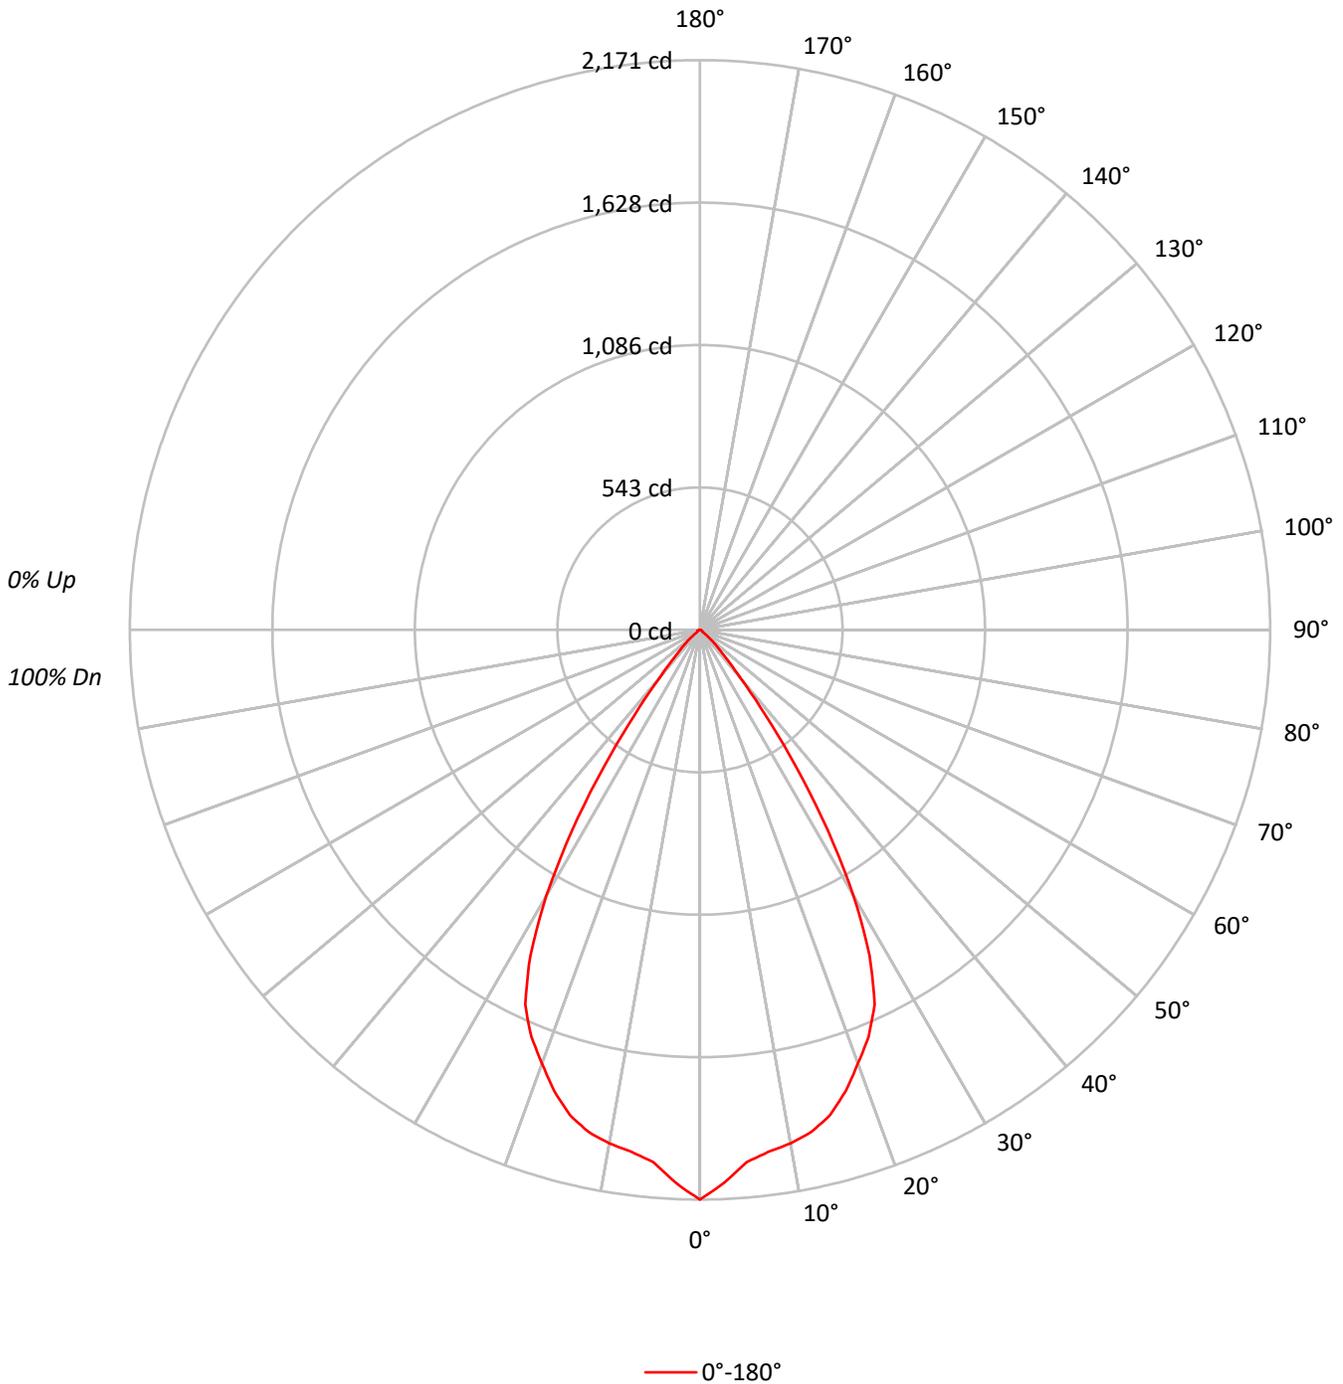



TEST NUMBER: P1268360
 CATALOG NUMBER: P3AS20R659735D010 E3D1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	75			
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	61	56	53	60	56	53	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	476058
5°	448051
10°	442343
15°	434554
20°	410282
25°	380804
30°	295995
35°	171216
40°	68986
45°	31755
50°	12349
55°	4817
60°	4166
65°	4099
70°	4039
75°	3982
80°	4041
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 31755 cd/sqm



TEST NUMBER: P1268360
 CATALOG NUMBER: P3AS20R659735D010 E3D1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.5	9.9
10°-20°	534.5	27.4
20°-30°	699.7	35.9
30°-40°	405.3	20.8
40°-50°	86.7	4.5
50°-60°	14.1	0.7
60°-70°	7.8	0.4
70°-80°	4.6	0.2
80°-90°	1.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1427.8	73.3
0°-40°	1833.1	94.1
0°-60°	1933.9	99.3
0°-90°	1948.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1948.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2171	
5°	2036	193
15°	1914	535
25°	1574	700
35°	640	405
45°	102	87
55°	13	14
65°	8	8
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1268360
CATALOG NUMBER: P3AS20R659735D010 E3D1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2171.0
2.5°	2109.5
5°	2035.5
7.5°	2005.5
10°	1986.6
12.5°	1959.8
15°	1914.2
17.5°	1843.3
20°	1758.2
22.5°	1677.8
25°	1573.9
27.5°	1399.0
30°	1169.0
32.5°	905.9
35°	639.6
37.5°	404.9
40°	241.0
42.5°	151.2
45°	102.4
47.5°	66.2
50°	36.2
52.5°	17.3
55°	12.6
57.5°	11.0
60°	9.5
62.5°	9.5
65°	7.9
67.5°	6.3
70°	6.3
72.5°	4.7
75°	4.7
77.5°	3.2
80°	3.2
82.5°	1.6
85°	1.6
87.5°	1.6
90°	0.0

(END OF REPORT)