

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268930

Luminaire Tested: P3AS05R159740DE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268930
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R159740DE010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R15 optic, 4000K CCT AND, 97CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 613.0 lumens
Efficiency: N/A
Efficacy: 85.1 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268930
CATALOG NUMBER: P3AS05R159740DE010 E3CB1MW

Luminous Intensity Polar Plot

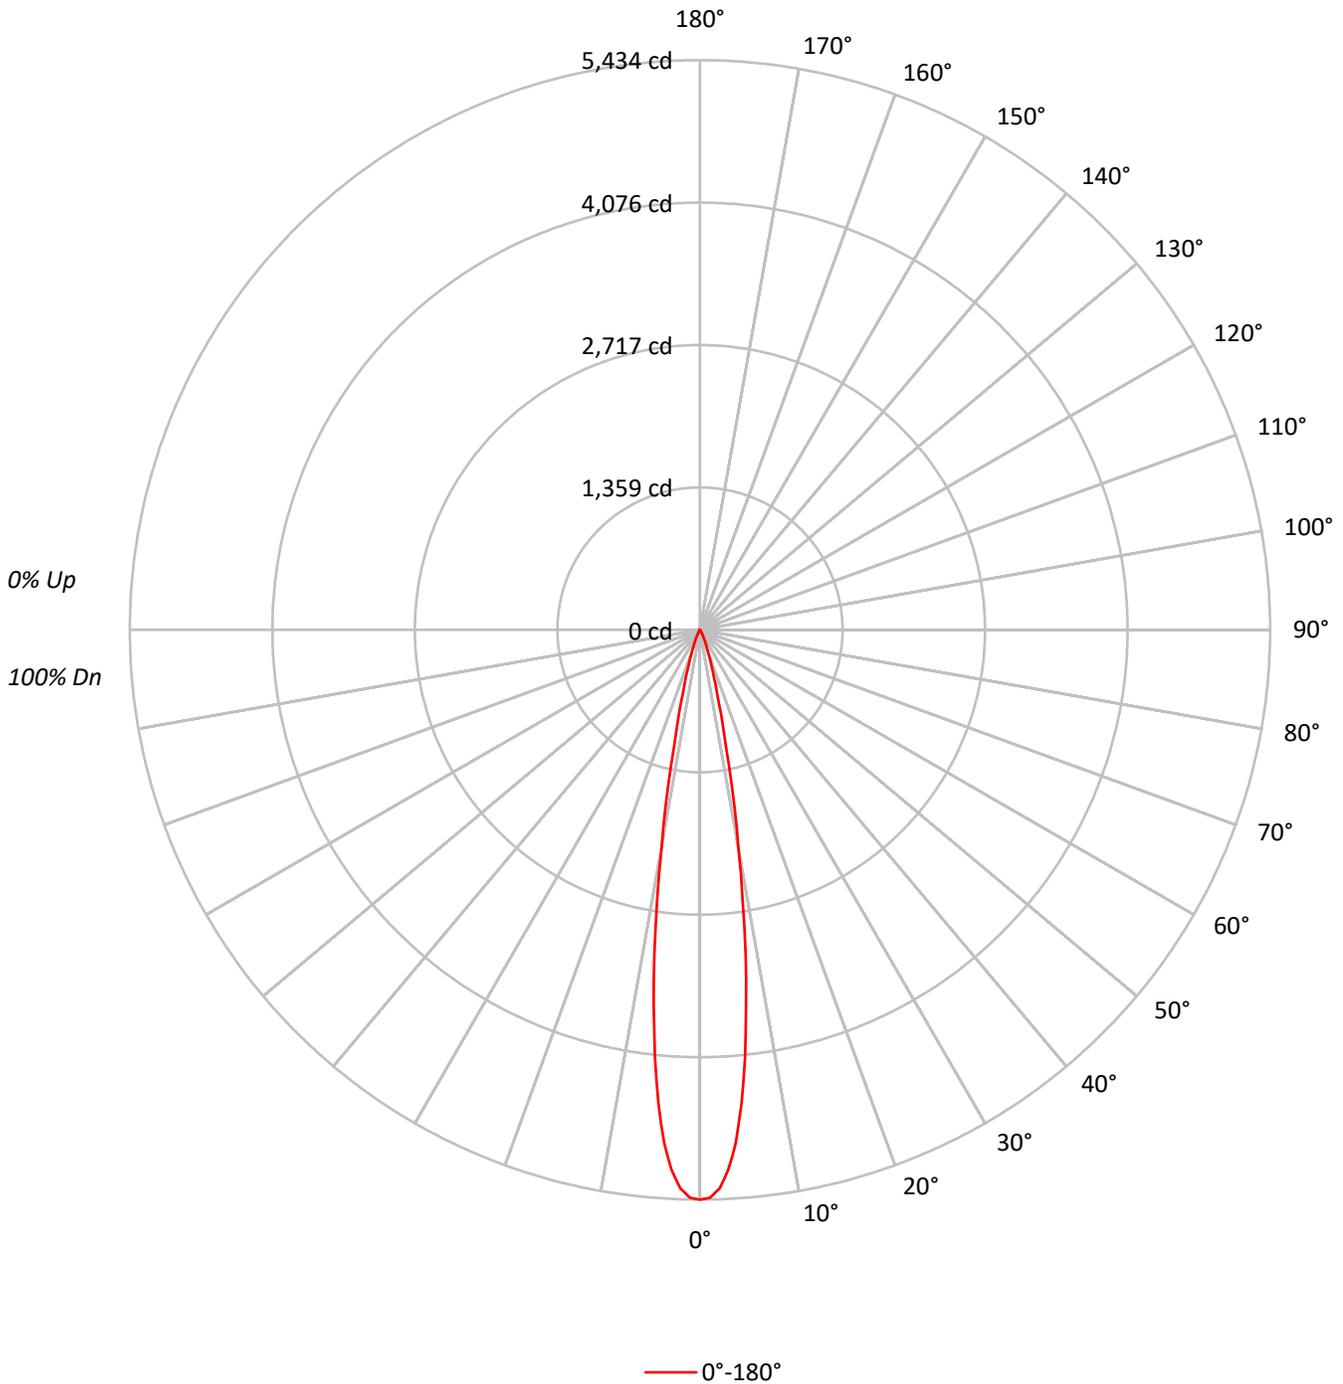



TEST NUMBER: P1268930
 CATALOG NUMBER: P3AS05R159740DE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98	98	98	98
2	113	110	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	97	95	94	94	94	94
4	107	103	100	97	106	102	99	97	100	97	95	98	96	94	97	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	92	91	91	91	91
6	103	98	94	92	102	97	94	92	96	93	91	95	92	91	94	92	90	89	89	89	89
7	101	96	92	90	100	95	92	90	94	91	89	93	91	89	92	90	89	88	88	88	88
8	99	94	90	88	98	93	90	88	92	90	88	92	89	87	91	89	87	86	86	86	86
9	97	92	89	87	97	92	89	86	91	88	86	90	88	86	90	87	86	85	85	85	85
10	96	90	87	85	95	90	87	85	89	87	85	89	86	85	88	86	85	84	84	84	84

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1191527
5°	998611
10°	470377
15°	141817
20°	52481
25°	20396
30°	7596
35°	2329
40°	830
45°	465
50°	341
55°	382
60°	439
65°	259
70°	321
75°	424
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 465 cd/sqm



TEST NUMBER: P1268930
 CATALOG NUMBER: P3AS05R159740DE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	350.7	57.2
10°-20°	208.5	34.0
20°-30°	43.8	7.1
30°-40°	7.1	1.2
40°-50°	1.2	0.2
50°-60°	0.9	0.1
60°-70°	0.6	0.1
70°-80°	0.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	603.0	98.4
0°-40°	610.1	99.5
0°-60°	612.2	99.9
0°-90°	613.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	613.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5434	
5°	4537	351
15°	625	208
25°	84	44
35°	9	7
45°	2	1
55°	1	1
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1268930
CATALOG NUMBER: P3AS05R159740DE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5433.8
1°	5416.8
2°	5330.6
3°	5158.0
4°	4905.0
5°	4536.7
6°	4103.9
7°	3609.1
8°	3136.6
9°	2601.6
10°	2112.5
12.5°	1139.9
15°	624.7
17.5°	365.9
20°	224.9
22.5°	137.6
25°	84.3
27.5°	50.9
30°	30.0
32.5°	17.0
35°	8.7
37.5°	4.8
40°	2.9
42.5°	1.9
45°	1.5
47.5°	1.0
50°	1.0
52.5°	1.0
55°	1.0
57.5°	1.0
60°	1.0
62.5°	0.5
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)