

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268996

Luminaire Tested: P3AS05R259740DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268996
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259740DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 97CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 656.0 lumens
Efficiency: N/A
Efficacy: 91.1 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268996
CATALOG NUMBER: P3AS05R259740DE010 E3D1WMH

Luminous Intensity Polar Plot

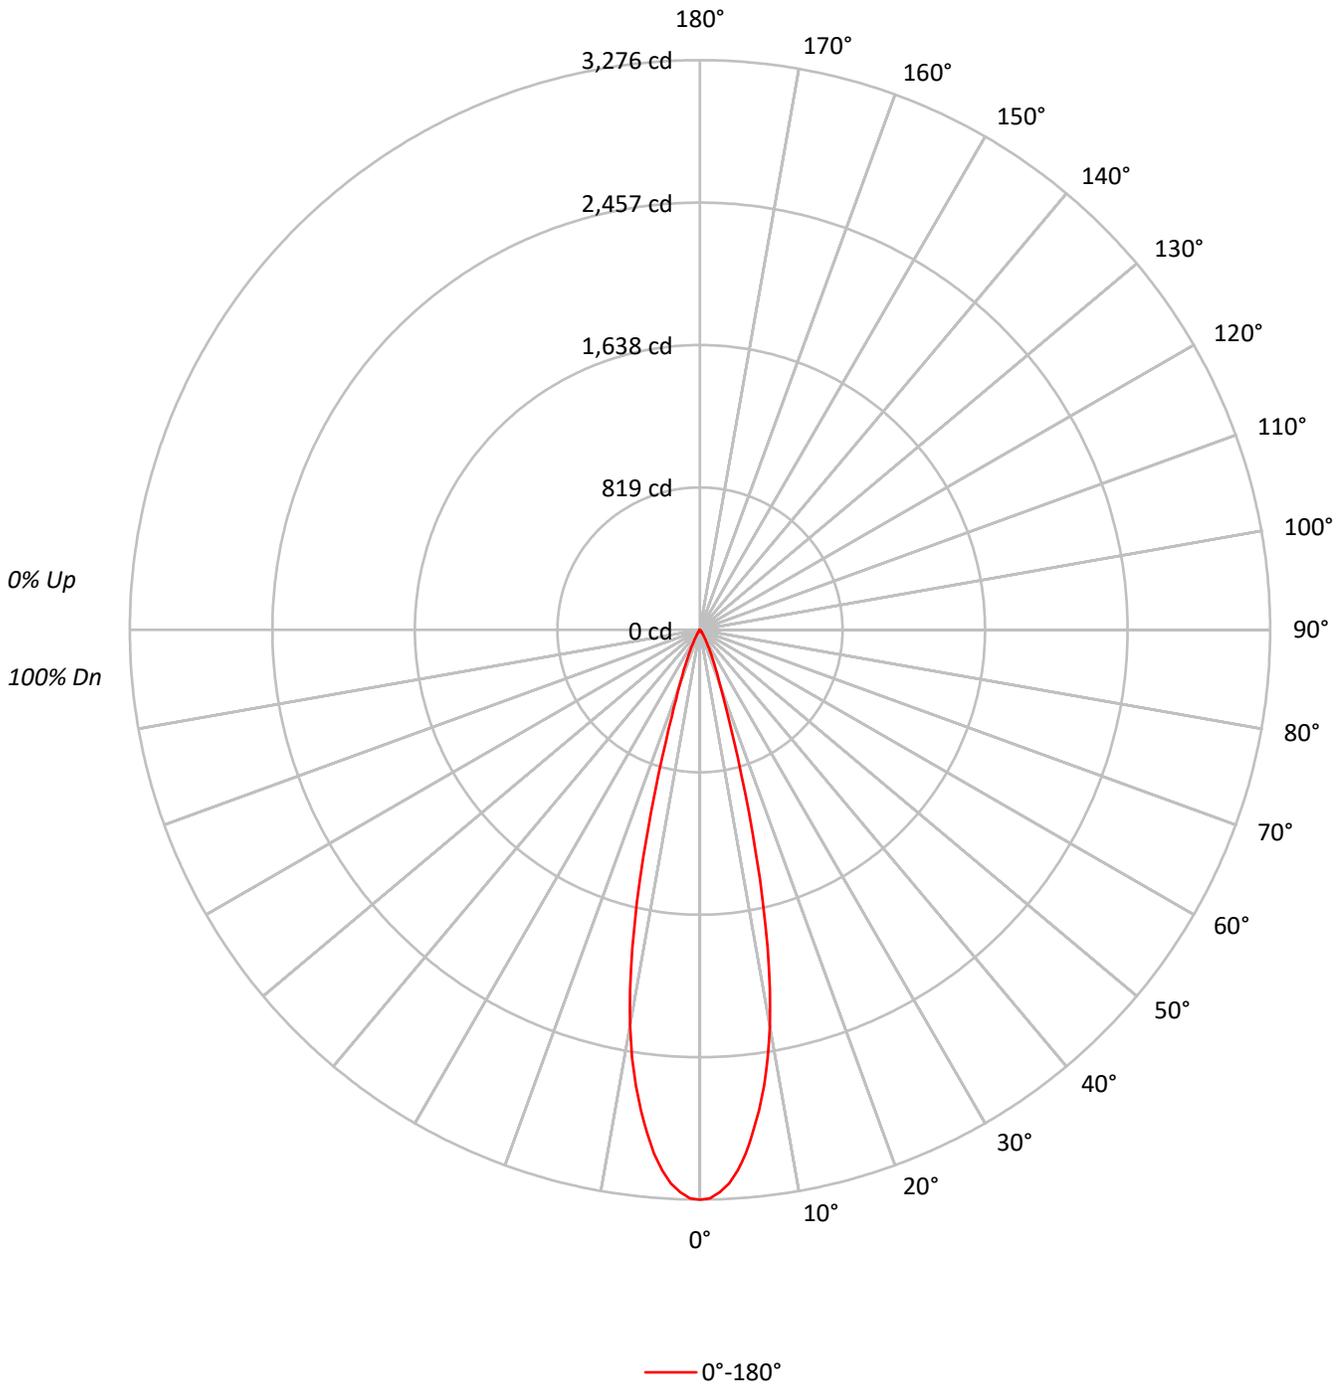



TEST NUMBER: P1268996
 CATALOG NUMBER: P3AS05R259740DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99	100
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	96	96	96	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	106	101	97	94	104	100	96	94	98	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	91	101	96	93	90	95	92	90	93	91	89	92	90	88	87	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85
7	98	92	88	85	97	91	87	85	90	87	84	89	86	84	88	86	84	83	83	83	83
8	95	89	85	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81
9	93	87	83	81	92	86	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79
10	91	85	81	79	90	84	81	79	84	81	78	83	80	78	83	80	78	77	77	77	77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	718451
5°	665528
10°	514931
15°	245949
20°	81090
25°	34187
30°	13243
35°	5729
40°	1918
45°	899
50°	341
55°	191
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 899 cd/sqm



TEST NUMBER: P1268996
 CATALOG NUMBER: P3AS05R259740DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	265.8	40.5
10°-20°	302.3	46.1
20°-30°	70.2	10.7
30°-40°	14.7	2.2
40°-50°	2.4	0.4
50°-60°	0.4	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	638.3	97.3
0°-40°	653.0	99.5
0°-60°	655.8	100.0
0°-90°	656.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	656.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3276	
5°	3024	266
15°	1083	302
25°	141	70
35°	21	15
45°	3	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1268996
CATALOG NUMBER: P3AS05R259740DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3276.4
1°	3269.7
2°	3235.7
3°	3187.9
4°	3114.9
5°	3023.5
6°	2906.3
7°	2783.5
8°	2645.8
9°	2490.5
10°	2312.6
11°	2106.4
12°	1869.7
13°	1610.5
14°	1339.3
15°	1083.4
16°	857.0
17°	667.6
18°	525.2
19°	420.0
20°	347.5
21°	290.4
22°	243.8
23°	203.6
24°	170.3
25°	141.3
27.5°	83.7
30°	52.3
32.5°	33.5
35°	21.4
37.5°	12.8
40°	6.7
42.5°	4.3
45°	2.9
47.5°	1.7
50°	1.0
52.5°	0.5
55°	0.5
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.0
72.5°	0.0



TEST NUMBER: P1268996
CATALOG NUMBER: P3AS05R259740DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)