

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1270235

Luminaire Tested: P3AS17R409740DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1270235
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R409740DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 4000K CCT AND, 97CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 449.0 lumens
Efficiency: N/A
Efficacy: 21.2 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1270235
CATALOG NUMBER: P3AS17R409740DE010 E3DLP1GPH

Luminous Intensity Polar Plot

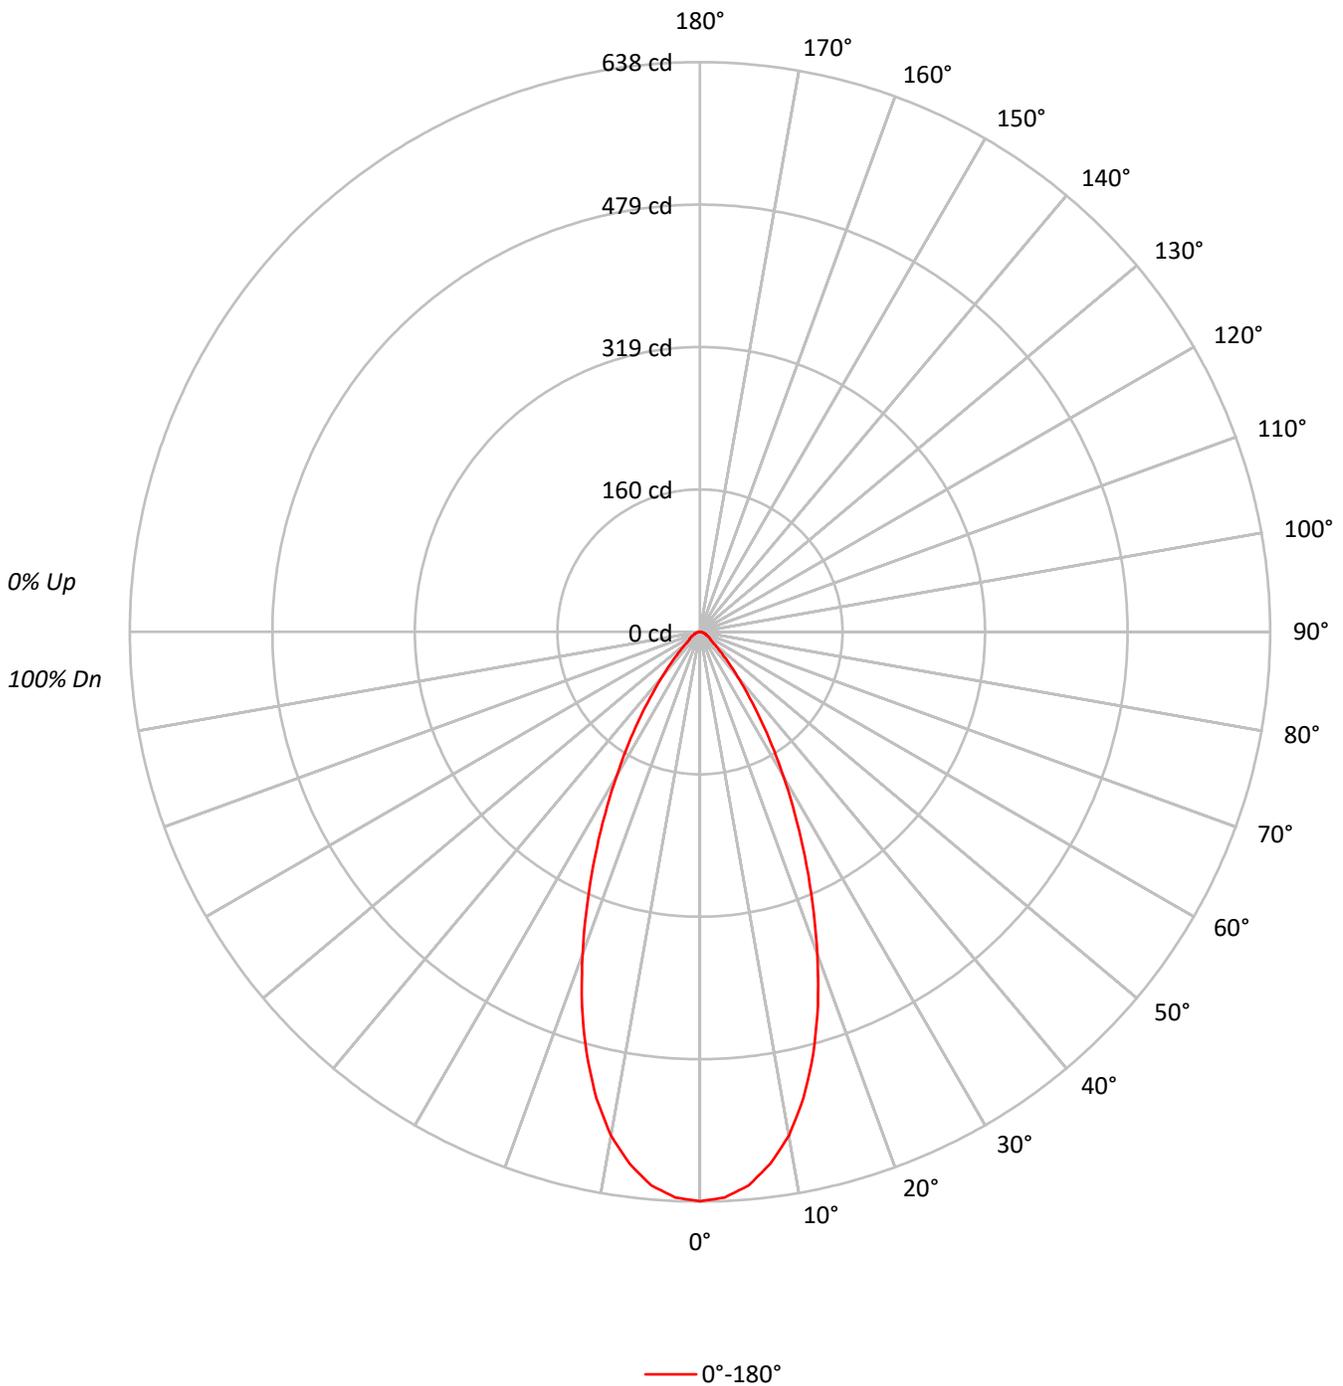



TEST NUMBER: P1270235
 CATALOG NUMBER: P3AS17R409740DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93
2	107	102	98	95	105	101	97	93	97	94	91	94	92	89	92	89	88	86				86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80				80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74				74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69				69
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65				65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	62	61				61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58				58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54				54
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51				51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	139813
5°	136980
10°	127542
15°	111147
20°	89584
25°	67141
30°	47197
35°	30918
40°	18721
45°	11195
50°	6686
55°	5390
60°	4824
65°	4099
70°	3911
75°	3135
80°	3031
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11195 cd/sqm



TEST NUMBER: P1270235
 CATALOG NUMBER: P3AS17R409740DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.8	12.9
10°-20°	134.9	30.0
20°-30°	127.1	28.3
30°-40°	73.5	16.4
40°-50°	29.3	6.5
50°-60°	13.0	2.9
60°-70°	8.0	1.8
70°-80°	4.2	0.9
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	319.7	71.2
0°-40°	393.2	87.6
0°-60°	435.5	97.0
0°-90°	449.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	449.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	638	
5°	622	58
15°	490	135
25°	278	127
35°	116	73
45°	36	29
55°	14	13
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1270235
CATALOG NUMBER: P3AS17R409740DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	637.6
2.5°	633.9
5°	622.3
7.5°	600.9
10°	572.8
12.5°	534.9
15°	489.6
17.5°	438.9
20°	383.9
22.5°	328.9
25°	277.5
27.5°	229.8
30°	186.4
32.5°	148.5
35°	115.5
37.5°	87.4
40°	65.4
42.5°	48.9
45°	36.1
47.5°	26.3
50°	19.6
52.5°	15.9
55°	14.1
57.5°	12.8
60°	11.0
62.5°	9.2
65°	7.9
67.5°	6.7
70°	6.1
72.5°	4.9
75°	3.7
77.5°	3.1
80°	2.4
82.5°	1.8
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)