

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272065

Luminaire Tested: P3AS13R509827DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272065
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R509827DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R50 optic, 2700K CCT AND, 98CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 760.0 lumens
Efficiency: N/A
Efficacy: 52.4 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272065
CATALOG NUMBER: P3AS13R509827DE010 E3DL1MW

Luminous Intensity Polar Plot

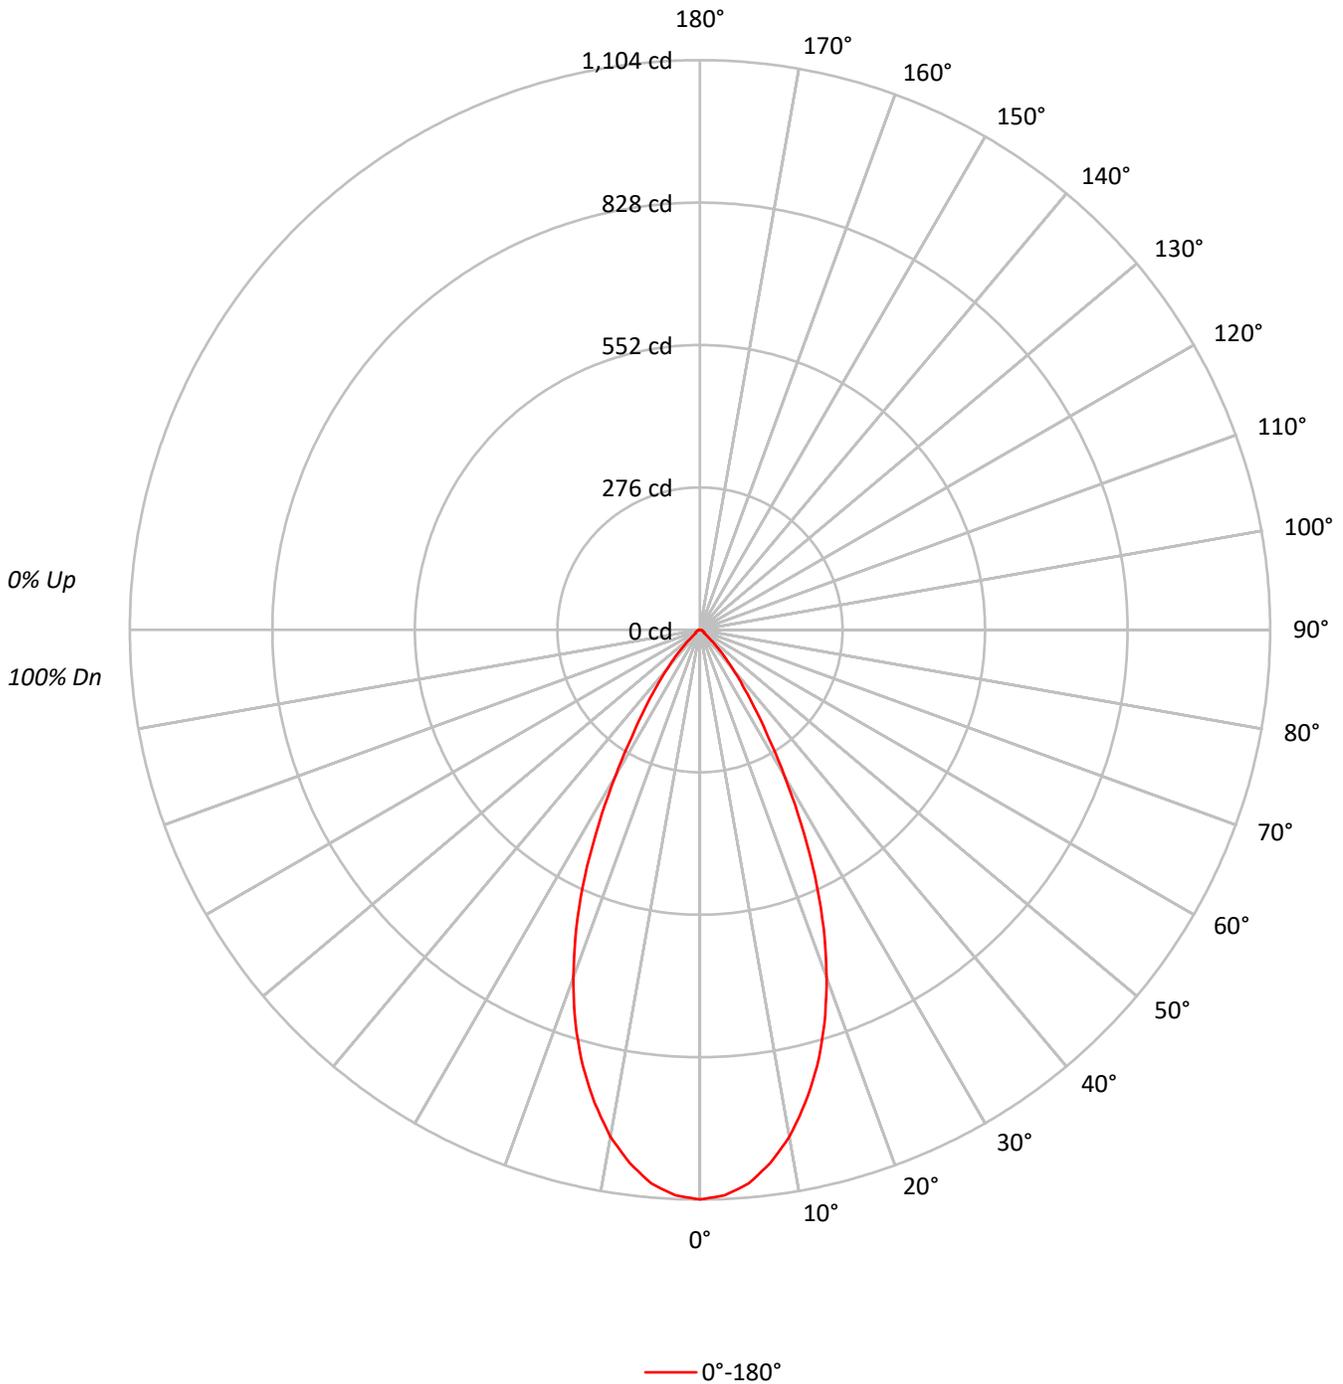



TEST NUMBER: P1272065
 CATALOG NUMBER: P3AS13R509827DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 114 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 | 101 | 99 | 98 | 97 | 96 | 95 | 94 | | | |
| 2 | 108 | 103 | 99 | 96 | 106 | 102 | 98 | 95 | 98 | 95 | 93 | 95 | 93 | 91 | 93 | 91 | 89 | 87 | | | |
| 3 | 103 | 97 | 92 | 88 | 101 | 95 | 91 | 87 | 93 | 89 | 86 | 90 | 87 | 84 | 88 | 85 | 83 | 82 | | | |
| 4 | 98 | 91 | 85 | 81 | 96 | 90 | 85 | 81 | 87 | 83 | 80 | 85 | 82 | 79 | 84 | 80 | 78 | 76 | | | |
| 5 | 93 | 85 | 80 | 75 | 92 | 84 | 79 | 75 | 83 | 78 | 74 | 81 | 77 | 74 | 79 | 76 | 73 | 72 | | | |
| 6 | 89 | 80 | 75 | 71 | 88 | 80 | 74 | 70 | 78 | 73 | 70 | 77 | 73 | 69 | 75 | 72 | 69 | 67 | | | |
| 7 | 85 | 76 | 70 | 66 | 84 | 75 | 70 | 66 | 74 | 69 | 66 | 73 | 69 | 65 | 72 | 68 | 65 | 64 | | | |
| 8 | 81 | 72 | 66 | 62 | 80 | 71 | 66 | 62 | 70 | 65 | 62 | 69 | 65 | 62 | 68 | 64 | 61 | 60 | | | |
| 9 | 78 | 68 | 63 | 59 | 76 | 68 | 62 | 59 | 67 | 62 | 59 | 66 | 62 | 58 | 65 | 61 | 58 | 57 | | | |
| 10 | 74 | 65 | 59 | 56 | 73 | 65 | 59 | 56 | 64 | 59 | 55 | 63 | 58 | 55 | 62 | 58 | 55 | 54 | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 241976 |
| 5° | 237089 |
| 10° | 222085 |
| 15° | 198821 |
| 20° | 167315 |
| 25° | 127677 |
| 30° | 82975 |
| 35° | 49202 |
| 40° | 28425 |
| 45° | 14234 |
| 50° | 5288 |
| 55° | 4129 |
| 60° | 3859 |
| 65° | 3528 |
| 70° | 3462 |
| 75° | 3474 |
| 80° | 3410 |
| 85° | 3522 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14234 cd/sqm



TEST NUMBER: P1272065
 CATALOG NUMBER: P3AS13R509827DE010 E3DL1MW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 100.2 | 13.2 |
| 10°-20° | 242.2 | 31.9 |
| 20°-30° | 237.6 | 31.3 |
| 30°-40° | 119.7 | 15.7 |
| 40°-50° | 37.8 | 5.0 |
| 50°-60° | 9.8 | 1.3 |
| 60°-70° | 7.0 | 0.9 |
| 70°-80° | 4.3 | 0.6 |
| 80°-90° | 1.5 | 0.2 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 580.0 | 76.3 |
| 0°-40° | 699.7 | 92.1 |
| 0°-60° | 747.3 | 98.3 |
| 0°-90° | 760.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 760.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1104 | |
| 5° | 1077 | 100 |
| 15° | 876 | 242 |
| 25° | 528 | 238 |
| 35° | 184 | 120 |
| 45° | 46 | 38 |
| 55° | 11 | 10 |
| 65° | 7 | 7 |
| 75° | 4 | 4 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P1272065
CATALOG NUMBER: P3AS13R509827DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 1103.5 |
| 2.5° | 1096.7 |
| 5° | 1077.1 |
| 7.5° | 1042.0 |
| 10° | 997.4 |
| 12.5° | 939.9 |
| 15° | 875.8 |
| 17.5° | 801.4 |
| 20° | 717.0 |
| 22.5° | 625.7 |
| 25° | 527.7 |
| 27.5° | 423.7 |
| 30° | 327.7 |
| 32.5° | 246.6 |
| 35° | 183.8 |
| 37.5° | 135.8 |
| 40° | 99.3 |
| 42.5° | 70.3 |
| 45° | 45.9 |
| 47.5° | 26.4 |
| 50° | 15.5 |
| 52.5° | 11.5 |
| 55° | 10.8 |
| 57.5° | 9.5 |
| 60° | 8.8 |
| 62.5° | 8.1 |
| 65° | 6.8 |
| 67.5° | 6.1 |
| 70° | 5.4 |
| 72.5° | 4.7 |
| 75° | 4.1 |
| 77.5° | 3.4 |
| 80° | 2.7 |
| 82.5° | 2.0 |
| 85° | 1.4 |
| 87.5° | 0.7 |
| 90° | 0.0 |

(END OF REPORT)