

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274964

Luminaire Tested: P3AS02R159835DE010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274964
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R159835DE010 E3DL1H
Description: 3in Adjustable LED luminaire with, R15 optic, 3500K CCT AND, 98CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 194.0 lumens
Efficiency: N/A
Efficacy: 53.9 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274964
CATALOG NUMBER: P3AS02R159835DE010 E3DL1H

Luminous Intensity Polar Plot

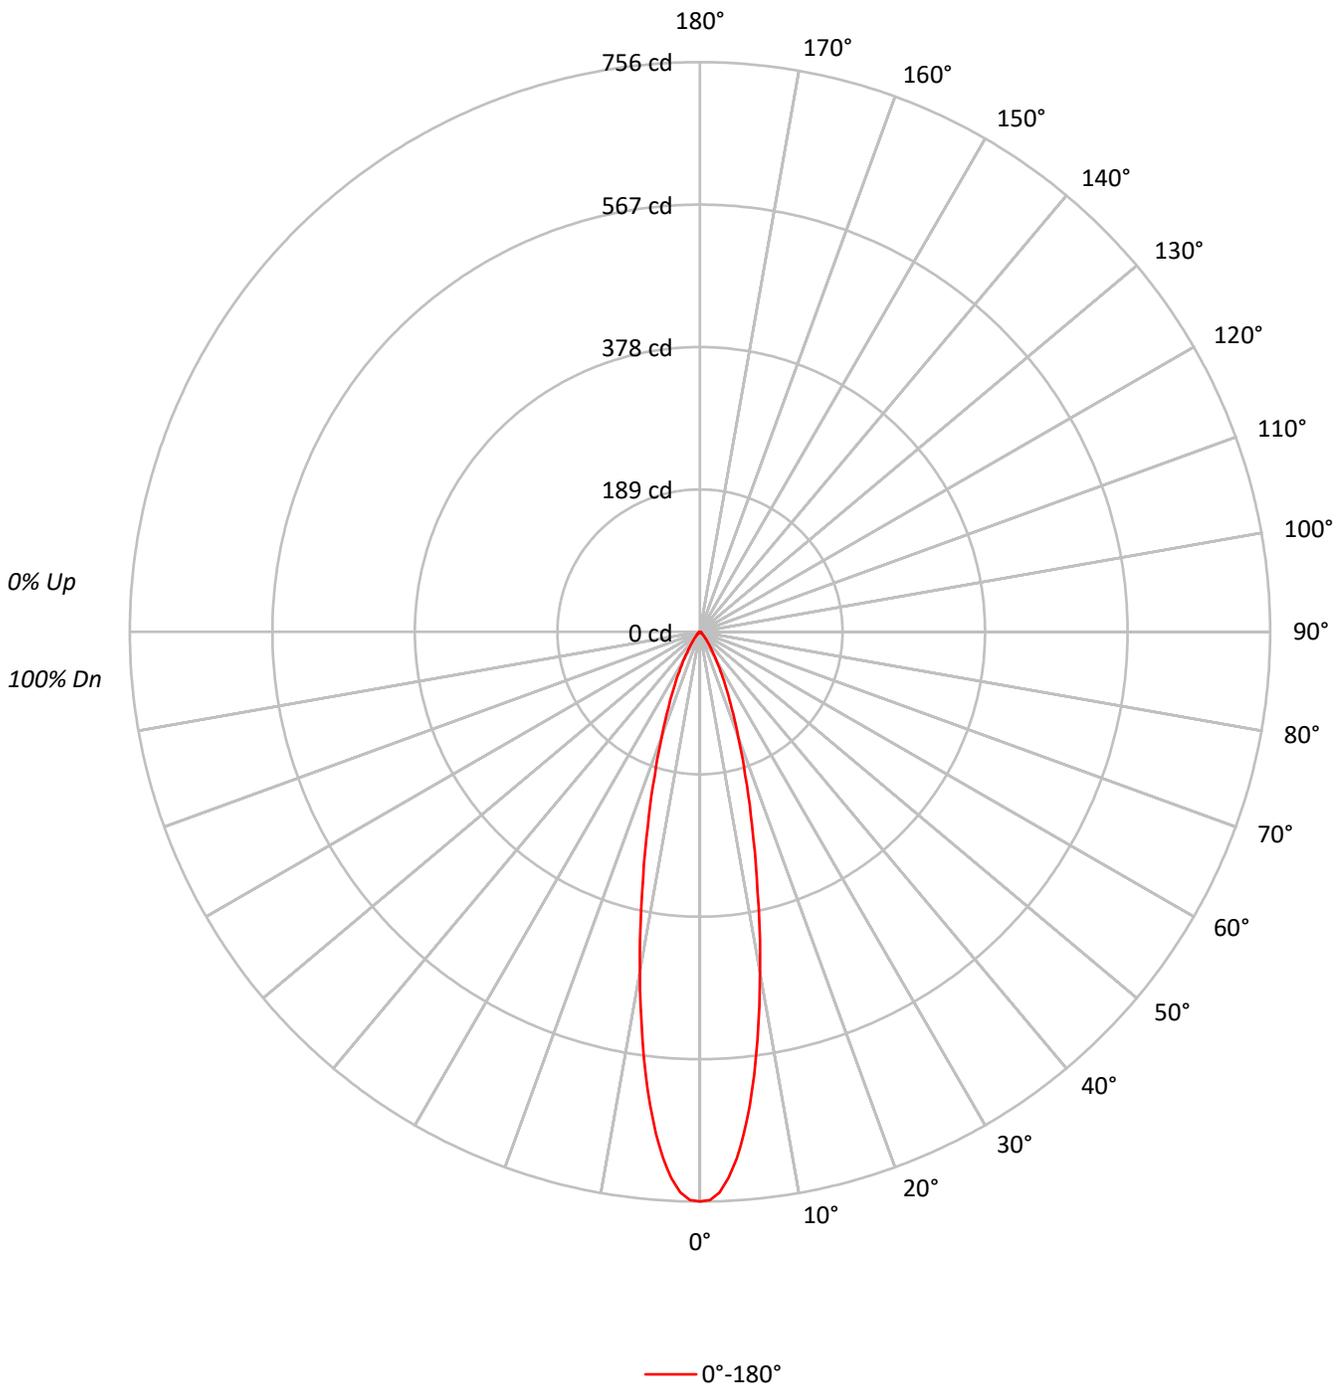



TEST NUMBER: P1274964
 CATALOG NUMBER: P3AS02R159835DE010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20					
RC	80				70				50				30				10			0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	94	93	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	91	90	88	91
3	106	101	97	93	104	99	96	93	97	94	91	94	92	90	92	90	88	87	87	86	85	87
4	102	96	92	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83	83	82	81	83
5	98	92	87	84	97	91	87	83	89	85	83	88	84	82	86	83	81	80	80	79	78	80
6	95	88	83	80	94	87	83	80	86	82	79	85	81	79	83	80	78	77	77	76	75	77
7	92	85	80	77	91	84	80	76	83	79	76	82	78	76	81	78	75	74	74	73	72	74
8	89	81	77	74	88	81	77	73	80	76	73	79	75	73	78	75	73	72	72	71	70	72
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	69	69	68	67	69
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67	67	66	65	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	165732
5°	147105
10°	102158
15°	60409
20°	34420
25°	19670
30°	10888
35°	5809
40°	3206
45°	1737
50°	1092
55°	841
60°	746
65°	675
70°	577
75°	593
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1737 cd/sqm



TEST NUMBER: P1274964
 CATALOG NUMBER: P3AS02R159835DE010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.8	29.3
10°-20°	75.0	38.7
20°-30°	38.6	19.9
30°-40°	14.5	7.5
40°-50°	4.7	2.4
50°-60°	2.0	1.1
60°-70°	1.3	0.7
70°-80°	0.8	0.4
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	170.4	87.9
0°-40°	185.0	95.3
0°-60°	191.7	98.8
0°-90°	194.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	194.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	756	
5°	668	57
15°	266	75
25°	81	39
35°	22	15
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1274964
CATALOG NUMBER: P3AS02R159835DE010 E3DL1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	755.8
1°	754.3
2°	744.4
3°	725.5
4°	700.6
5°	668.3
6°	631.7
7°	591.5
8°	546.8
9°	502.7
10°	458.8
12.5°	353.0
15°	266.1
17.5°	199.2
20°	147.5
22.5°	110.1
25°	81.3
27.5°	59.2
30°	43.0
32.5°	30.5
35°	21.7
37.5°	15.5
40°	11.2
42.5°	8.0
45°	5.6
47.5°	4.1
50°	3.2
52.5°	2.6
55°	2.2
57.5°	1.9
60°	1.7
62.5°	1.5
65°	1.3
67.5°	1.1
70°	0.9
72.5°	0.9
75°	0.7
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.0
90°	0.0

(END OF REPORT)