

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274997

Luminaire Tested: P3AS02R209835DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274997
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R209835DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 98CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 193.0 lumens
Efficiency: N/A
Efficacy: 53.6 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274997
CATALOG NUMBER: P3AS02R209835DE010 E3DL1LI

Luminous Intensity Polar Plot

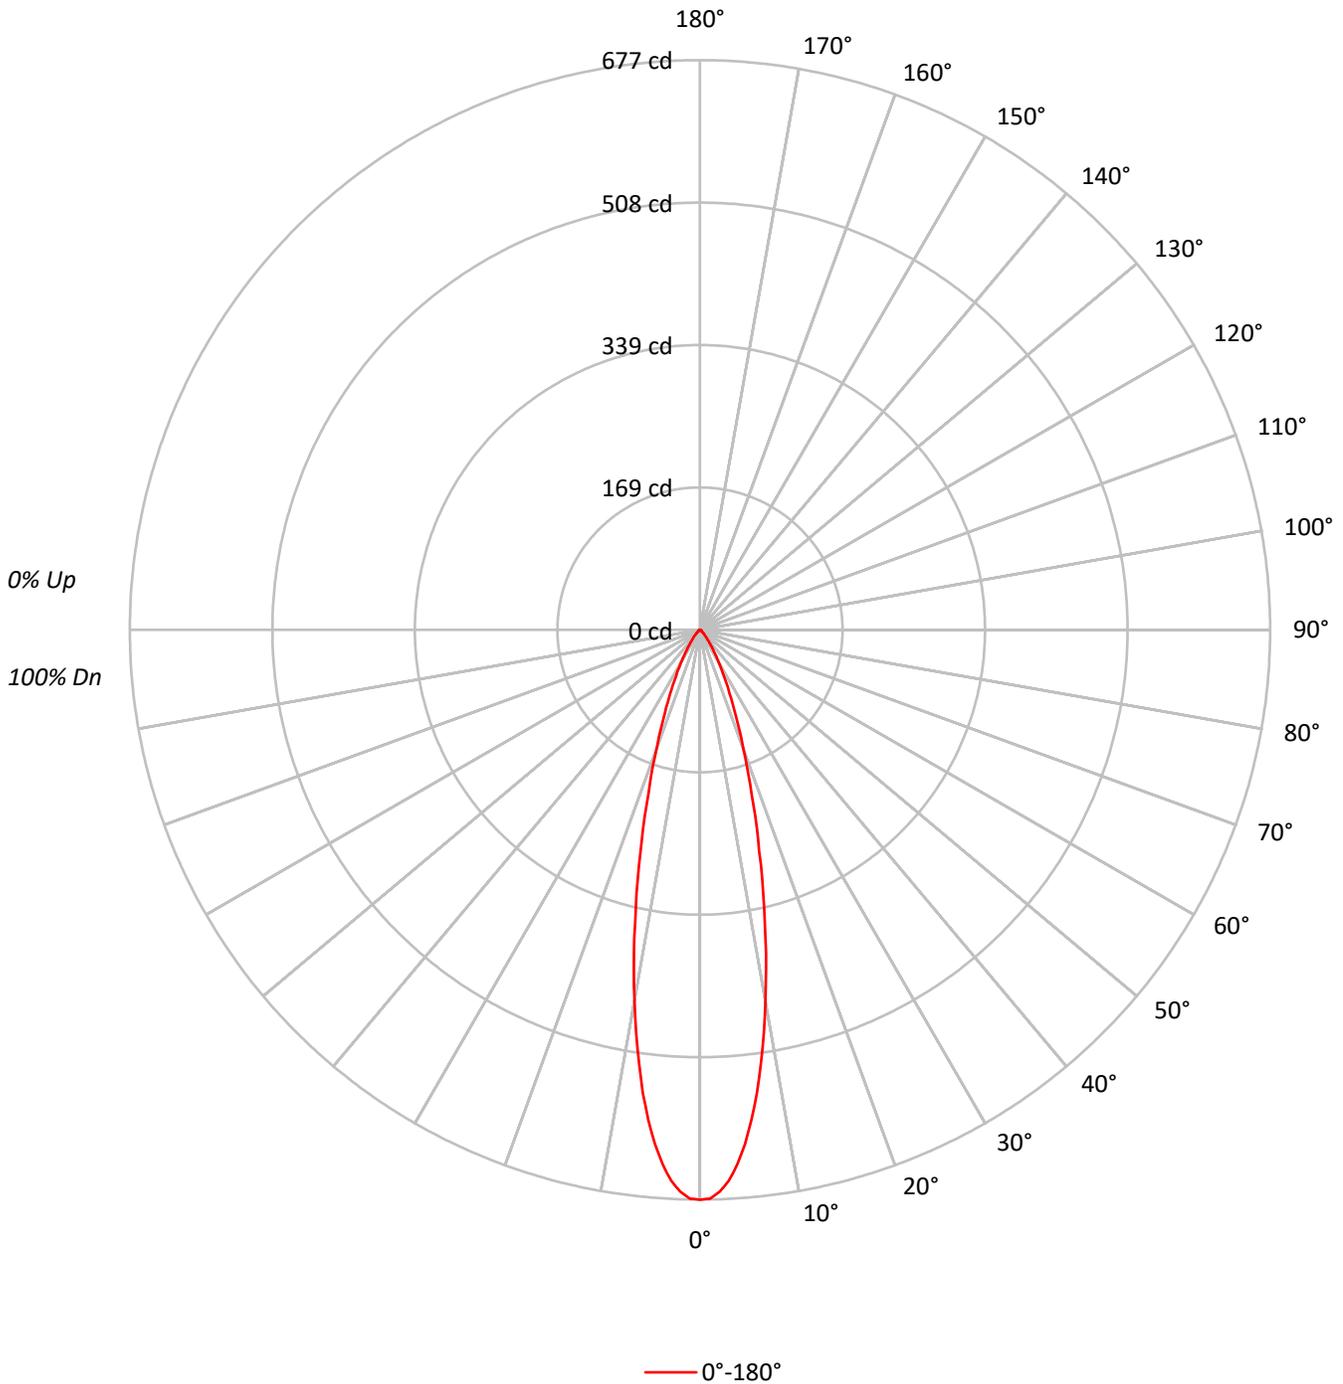



TEST NUMBER: P1274997
 CATALOG NUMBER: P3AS02R209835DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91		
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87		
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83		
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79		
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76		
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73		
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	77	74	72	71		
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68		
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	148497
5°	134977
10°	99753
15°	61703
20°	35236
25°	20130
30°	11293
35°	6130
40°	3349
45°	1861
50°	1092
55°	803
60°	746
65°	675
70°	577
75°	593
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1861 cd/sqm



TEST NUMBER: P1274997
 CATALOG NUMBER: P3AS02R209835DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.1	27.5
10°-20°	75.8	39.3
20°-30°	39.6	20.5
30°-40°	15.3	7.9
40°-50°	5.0	2.6
50°-60°	2.0	1.0
60°-70°	1.3	0.7
70°-80°	0.8	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	168.5	87.3
0°-40°	183.8	95.2
0°-60°	190.7	98.8
0°-90°	193.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	193.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	677	
5°	613	53
15°	272	76
25°	83	40
35°	23	15
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1274997
CATALOG NUMBER: P3AS02R209835DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	677.2
1°	675.9
2°	667.9
3°	655.5
4°	636.5
5°	613.2
6°	585.6
7°	555.1
8°	519.6
9°	485.1
10°	448.0
12.5°	356.1
15°	271.8
17.5°	203.4
20°	151.0
22.5°	111.9
25°	83.2
27.5°	61.3
30°	44.6
32.5°	32.3
35°	22.9
37.5°	16.6
40°	11.7
42.5°	8.4
45°	6.0
47.5°	4.3
50°	3.2
52.5°	2.4
55°	2.1
57.5°	1.9
60°	1.7
62.5°	1.5
65°	1.3
67.5°	1.1
70°	0.9
72.5°	0.9
75°	0.7
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)