

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281162

Luminaire Tested: P3AS05R25B2750DE010 E3DL1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281162
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R25B2750DE010 E3DL1GPH_2700K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 204.0 lumens
Efficiency: N/A
Efficacy: 34.6 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281162
CATALOG NUMBER: P3AS05R25B2750DE010 E3DL1GPH_2700K

Luminous Intensity Polar Plot

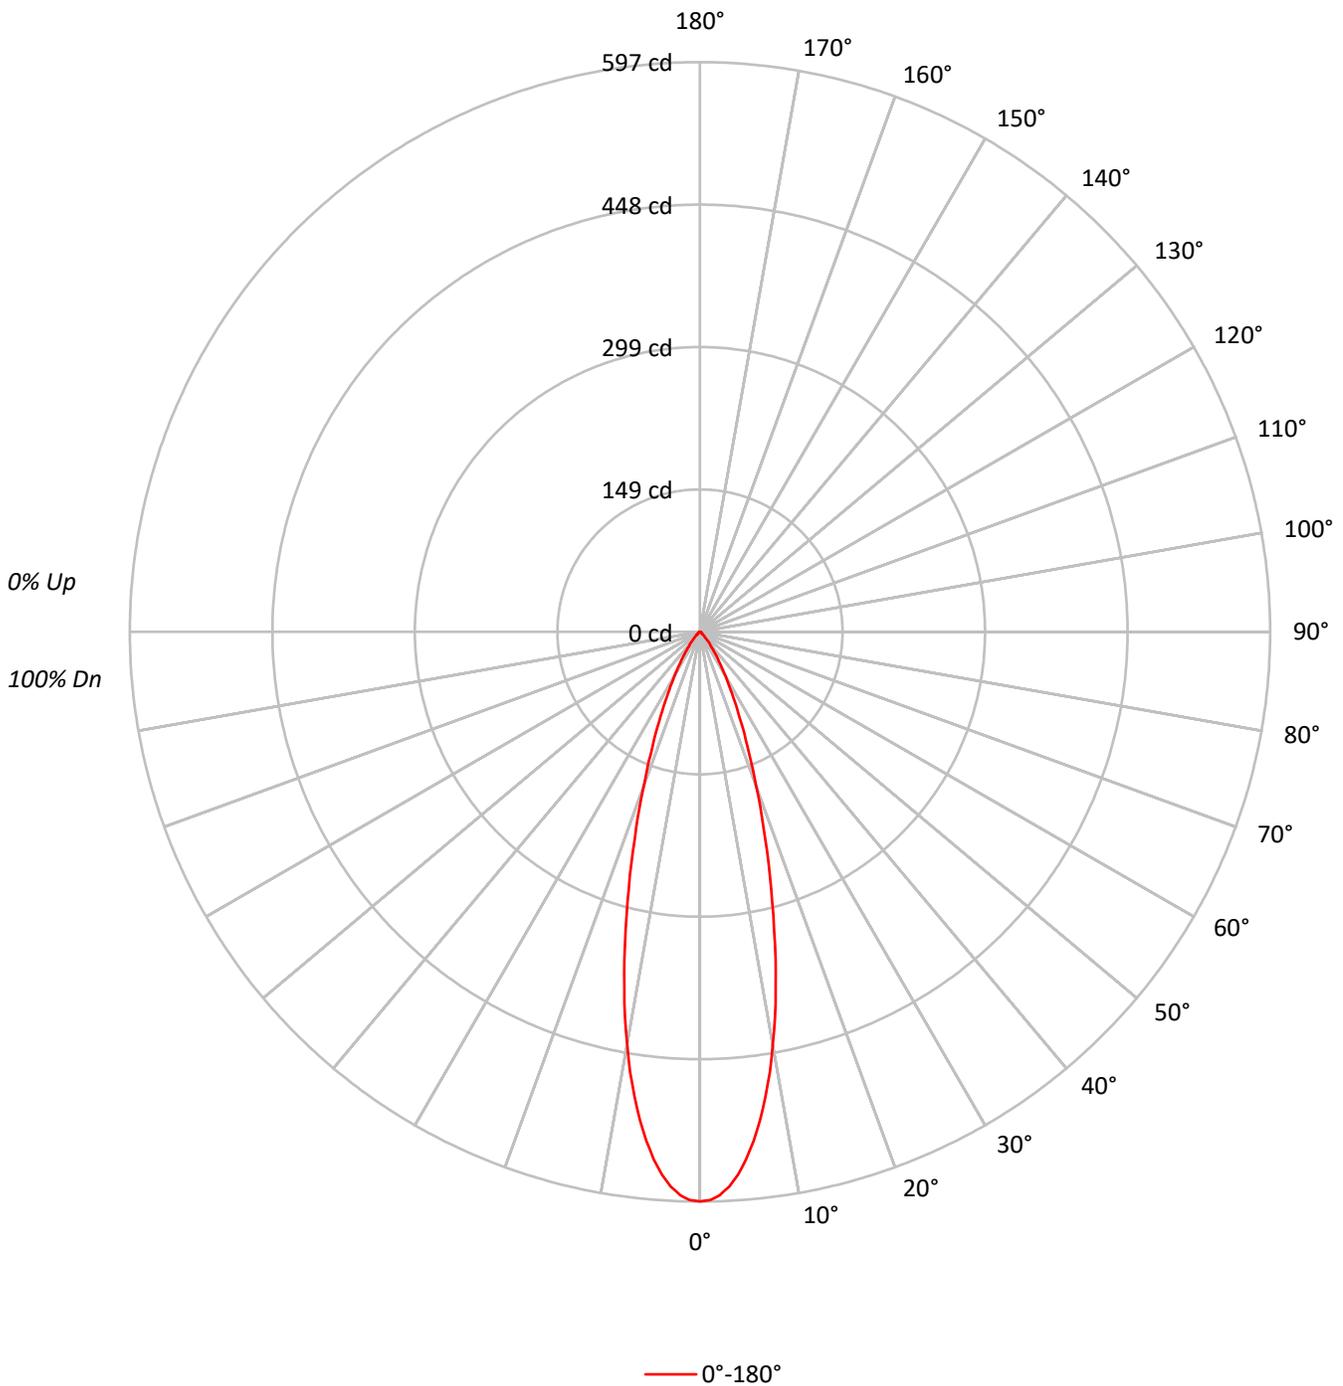



TEST NUMBER: P1281162
 CATALOG NUMBER: P3AS05R25B2750DE010 E3DL1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	86	86	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	82	82	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	78	78	78
6	94	86	81	78	92	86	81	77	84	80	77	83	79	76	82	78	76	75	75	75	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	66	66	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	130867
5°	122100
10°	97794
15°	66379
20°	40160
25°	23493
30°	13369
35°	7362
40°	3893
45°	2047
50°	1194
55°	879
60°	789
65°	830
70°	769
75°	678
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2047 cd/sqm



TEST NUMBER: P1281162

CATALOG NUMBER: P3AS05R25B2750DE010 E3DL1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.2	24.1
10°-20°	80.4	39.4
20°-30°	45.9	22.5
30°-40°	18.1	8.9
40°-50°	5.6	2.7
50°-60°	2.2	1.1
60°-70°	1.5	0.7
70°-80°	0.8	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	175.5	86.0
0°-40°	193.7	94.9
0°-60°	201.4	98.7
0°-90°	204.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	204.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	597	
5°	555	49
15°	292	80
25°	97	46
35°	28	18
45°	7	6
55°	2	2
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1281162
CATALOG NUMBER: P3AS05R25B2750DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	596.8
1°	595.6
2°	590.7
3°	582.1
4°	570.2
5°	554.7
6°	536.3
7°	515.7
8°	491.7
9°	467.1
10°	439.2
11°	411.7
12°	381.5
13°	351.7
14°	321.1
15°	292.4
17.5°	226.7
20°	172.1
22.5°	129.3
25°	97.1
27.5°	71.9
30°	52.8
32.5°	38.2
35°	27.5
37.5°	19.5
40°	13.6
42.5°	9.4
45°	6.6
47.5°	4.7
50°	3.5
52.5°	2.7
55°	2.3
57.5°	2.1
60°	1.8
62.5°	1.6
65°	1.6
67.5°	1.4
70°	1.2
72.5°	1.0
75°	0.8
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.2



TEST NUMBER: P1281162
CATALOG NUMBER: P3AS05R25B2750DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)