

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294798

Luminaire Tested: P3AS09R65W2N902750DE010 E3DLD1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1294798
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R65W2N902750DE010 E3DLD1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 2700K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 204.0 lumens
Efficiency: N/A
Efficacy: 22.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1294798
CATALOG NUMBER: P3AS09R65W2N902750DE010 E3DLD1GPH_2700K

Luminous Intensity Polar Plot

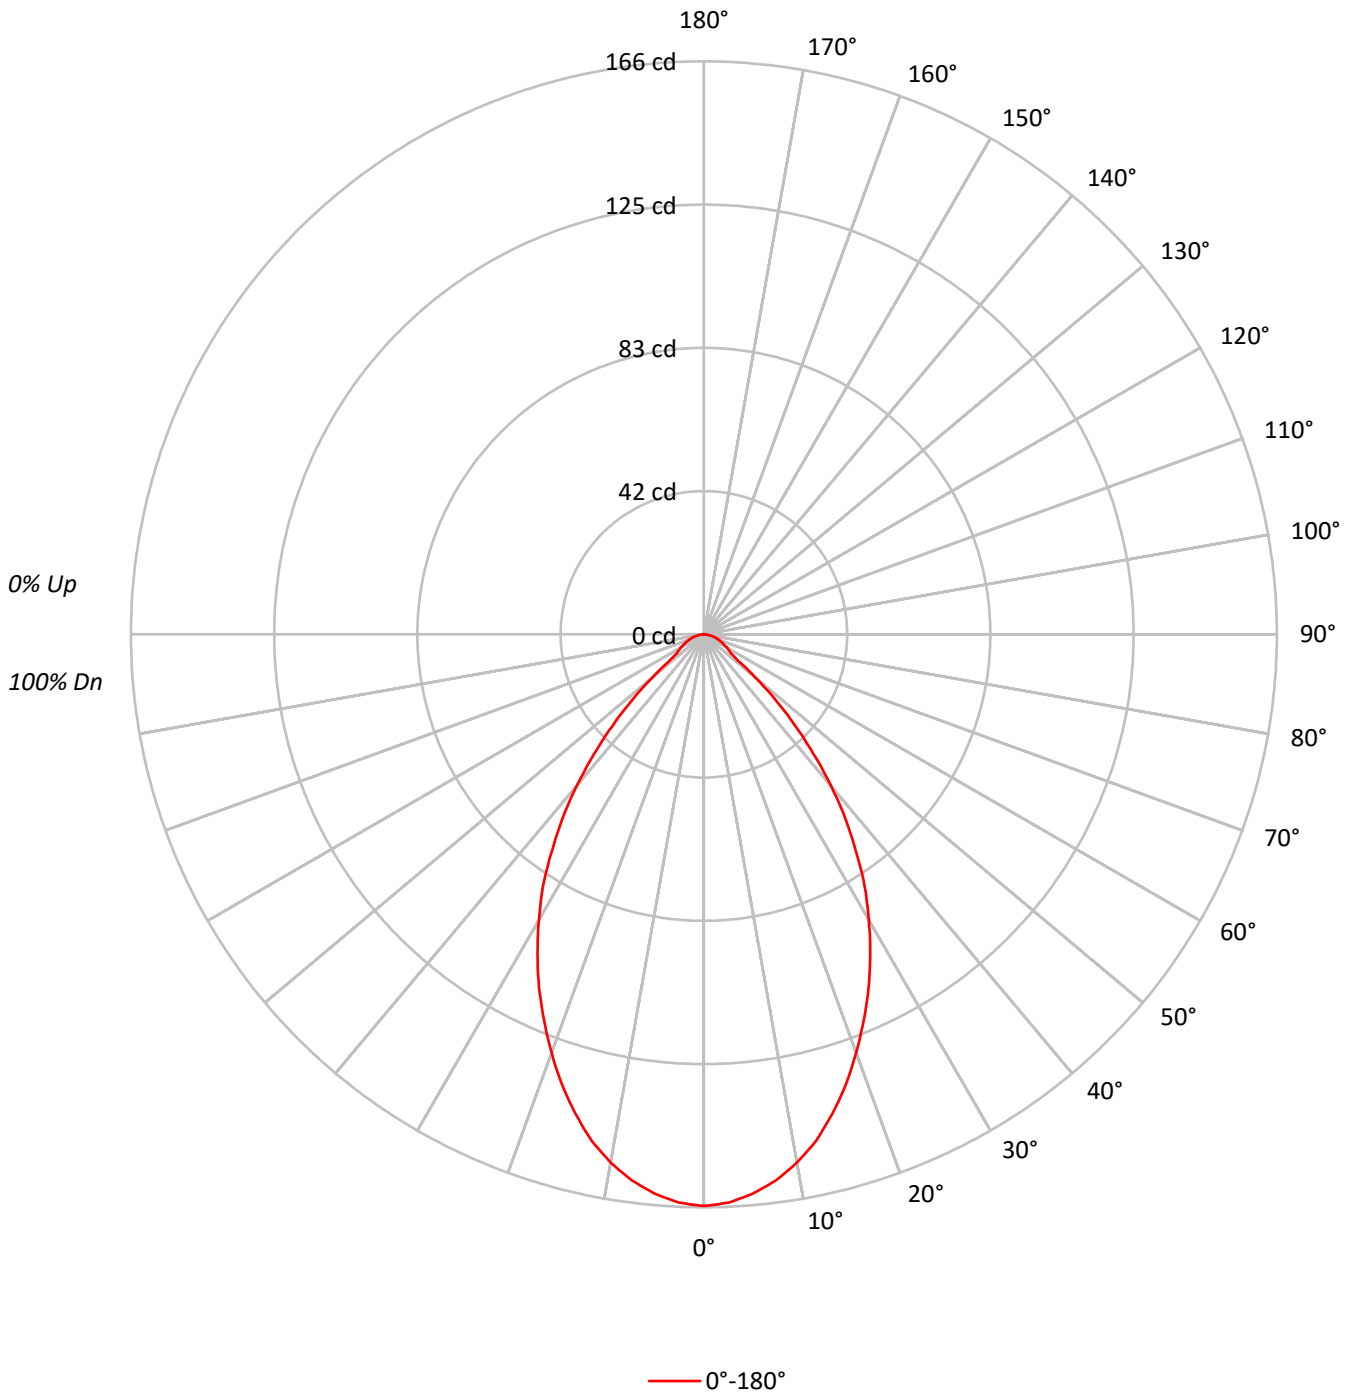



TEST NUMBER: P1294798
 CATALOG NUMBER: P3AS09R65W2N902750DE010 E3DLD1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	36313
5°	35813
10°	34602
15°	32645
20°	30103
25°	27340
30°	24206
35°	20586
40°	16402
45°	11567
50°	6720
55°	3670
60°	3421
65°	3113
70°	2821
75°	2626
80°	2273
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11567 cd/sqm



TEST NUMBER: P1294798

CATALOG NUMBER: P3AS09R65W2N902750DE010 E3DLD1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.3	7.5
10°-20°	40.2	19.7
20°-30°	51.7	25.3
30°-40°	47.8	23.4
40°-50°	28.9	14.2
50°-60°	9.8	4.8
60°-70°	5.9	2.9
70°-80°	3.3	1.6
80°-90°	1.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	107.2	52.6
0°-40°	155.1	76.0
0°-60°	193.8	95.0
0°-90°	204.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	204.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	166	
5°	163	15
15°	144	40
25°	113	52
35°	77	48
45°	37	29
55°	10	10
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1294798
CATALOG NUMBER: P3AS09R65W2N902750DE010 E3DLD1GPH_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	165.6
2.5°	164.8
5°	162.7
7.5°	159.6
10°	155.4
12.5°	150.3
15°	143.8
17.5°	136.8
20°	129.0
22.5°	121.0
25°	113.0
27.5°	104.4
30°	95.6
32.5°	86.8
35°	76.9
37.5°	67.4
40°	57.3
42.5°	47.2
45°	37.3
47.5°	28.2
50°	19.7
52.5°	12.4
55°	9.6
57.5°	8.5
60°	7.8
62.5°	6.7
65°	6.0
67.5°	5.2
70°	4.4
72.5°	3.9
75°	3.1
77.5°	2.6
80°	1.8
82.5°	1.3
85°	0.8
87.5°	0.5
90°	0.0

(END OF REPORT)