

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297798

Luminaire Tested: P3AS13R50W2N902765DE010 E3DLD1GPH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1297798  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R50W2N902765DE010 E3DLD1GPH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 298.0 lumens  
Efficiency: N/A  
Efficacy: 24.2 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1297798  
CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLD1GPH\_2700K

### Luminous Intensity Polar Plot

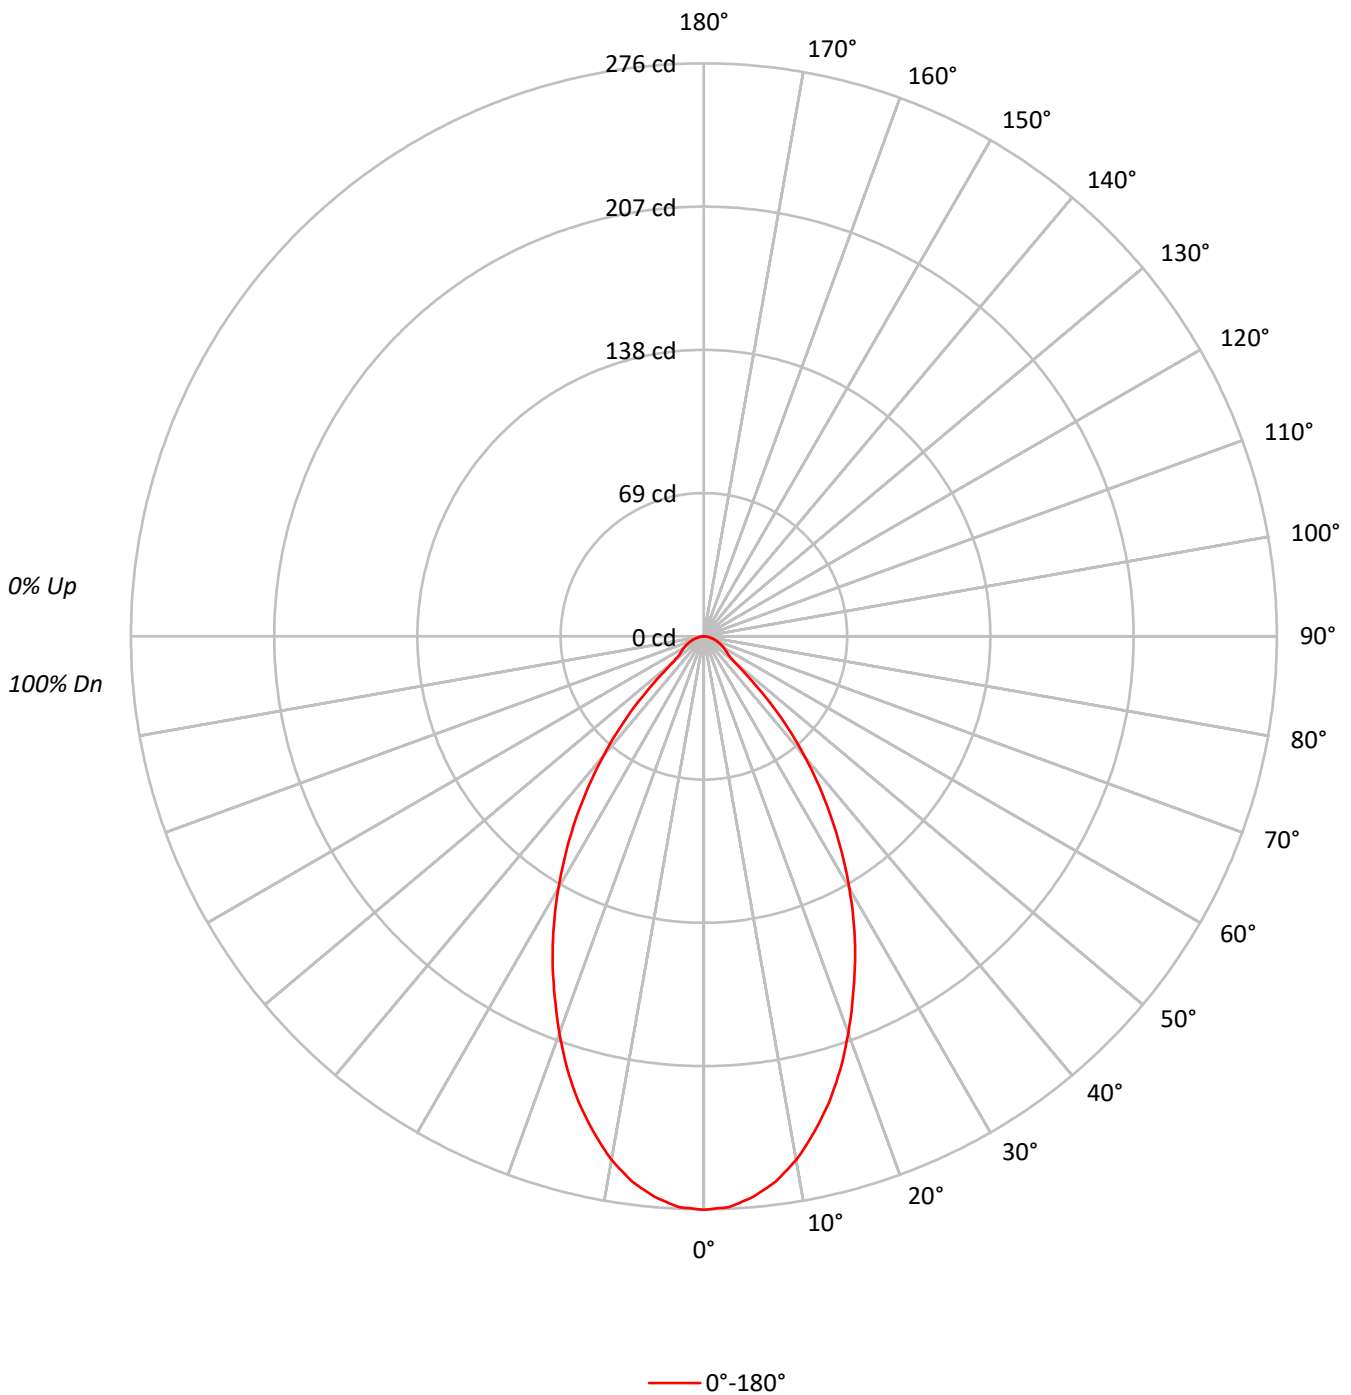



TEST NUMBER: P1297798

CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLD1GPH\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	83			83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			75
4	93	85	78	73	91	83	77	73	81	76	72	79	75	71	77	73	70	69			69
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63			63
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58			58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	53			53
8	74	63	57	52	73	63	56	52	61	56	52	60	55	51	59	55	51	50			50
9	70	59	53	48	69	59	52	48	58	52	48	57	52	48	56	51	48	46			46
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43			43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	60565
5°	59674
10°	57024
15°	52804
20°	47464
25°	41712
30°	35474
35°	28777
40°	21612
45°	13924
50°	6618
55°	5199
60°	4912
65°	4566
70°	4167
75°	3728
80°	3410
85°	3522

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13924 cd/sqm



TEST NUMBER: P1297798

CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLD1GPH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	25.4	8.5
10°-20°	64.9	21.8
20°-30°	78.8	26.4
30°-40°	66.8	22.4
40°-50°	34.7	11.6
50°-60°	12.5	4.2
60°-70°	8.7	2.9
70°-80°	4.7	1.6
80°-90°	1.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	169.1	56.7
0°-40°	235.9	79.2
0°-60°	283.1	95.0
0°-90°	298.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	298.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	276	
5°	271	25
15°	233	65
25°	172	79
35°	108	67
45°	45	35
55°	14	13
65°	9	9
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P1297798  
CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLD1GPH\_2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	276.2
2.5°	275.2
5°	271.1
7.5°	264.9
10°	256.1
12.5°	244.9
15°	232.6
17.5°	218.7
20°	203.4
22.5°	187.7
25°	172.4
27.5°	156.5
30°	140.1
32.5°	123.8
35°	107.5
37.5°	91.5
40°	75.5
42.5°	60.2
45°	44.9
47.5°	29.9
50°	19.4
52.5°	15.0
55°	13.6
57.5°	12.2
60°	11.2
62.5°	9.9
65°	8.8
67.5°	7.5
70°	6.5
72.5°	5.4
75°	4.4
77.5°	3.4
80°	2.7
82.5°	2.0
85°	1.4
87.5°	0.7
90°	0.0

(END OF REPORT)