

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298304

Luminaire Tested: P3AS13R60W2N902750DE010 E3DLP1GPH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1298304  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R60W2N902750DE010 E3DLP1GPH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 2700K CCT AND, 90CRI ,  
E3DLP1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 247.0 lumens  
Efficiency: N/A  
Efficacy: 20.1 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1298304  
CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DLP1GPH\_2700K

### Luminous Intensity Polar Plot

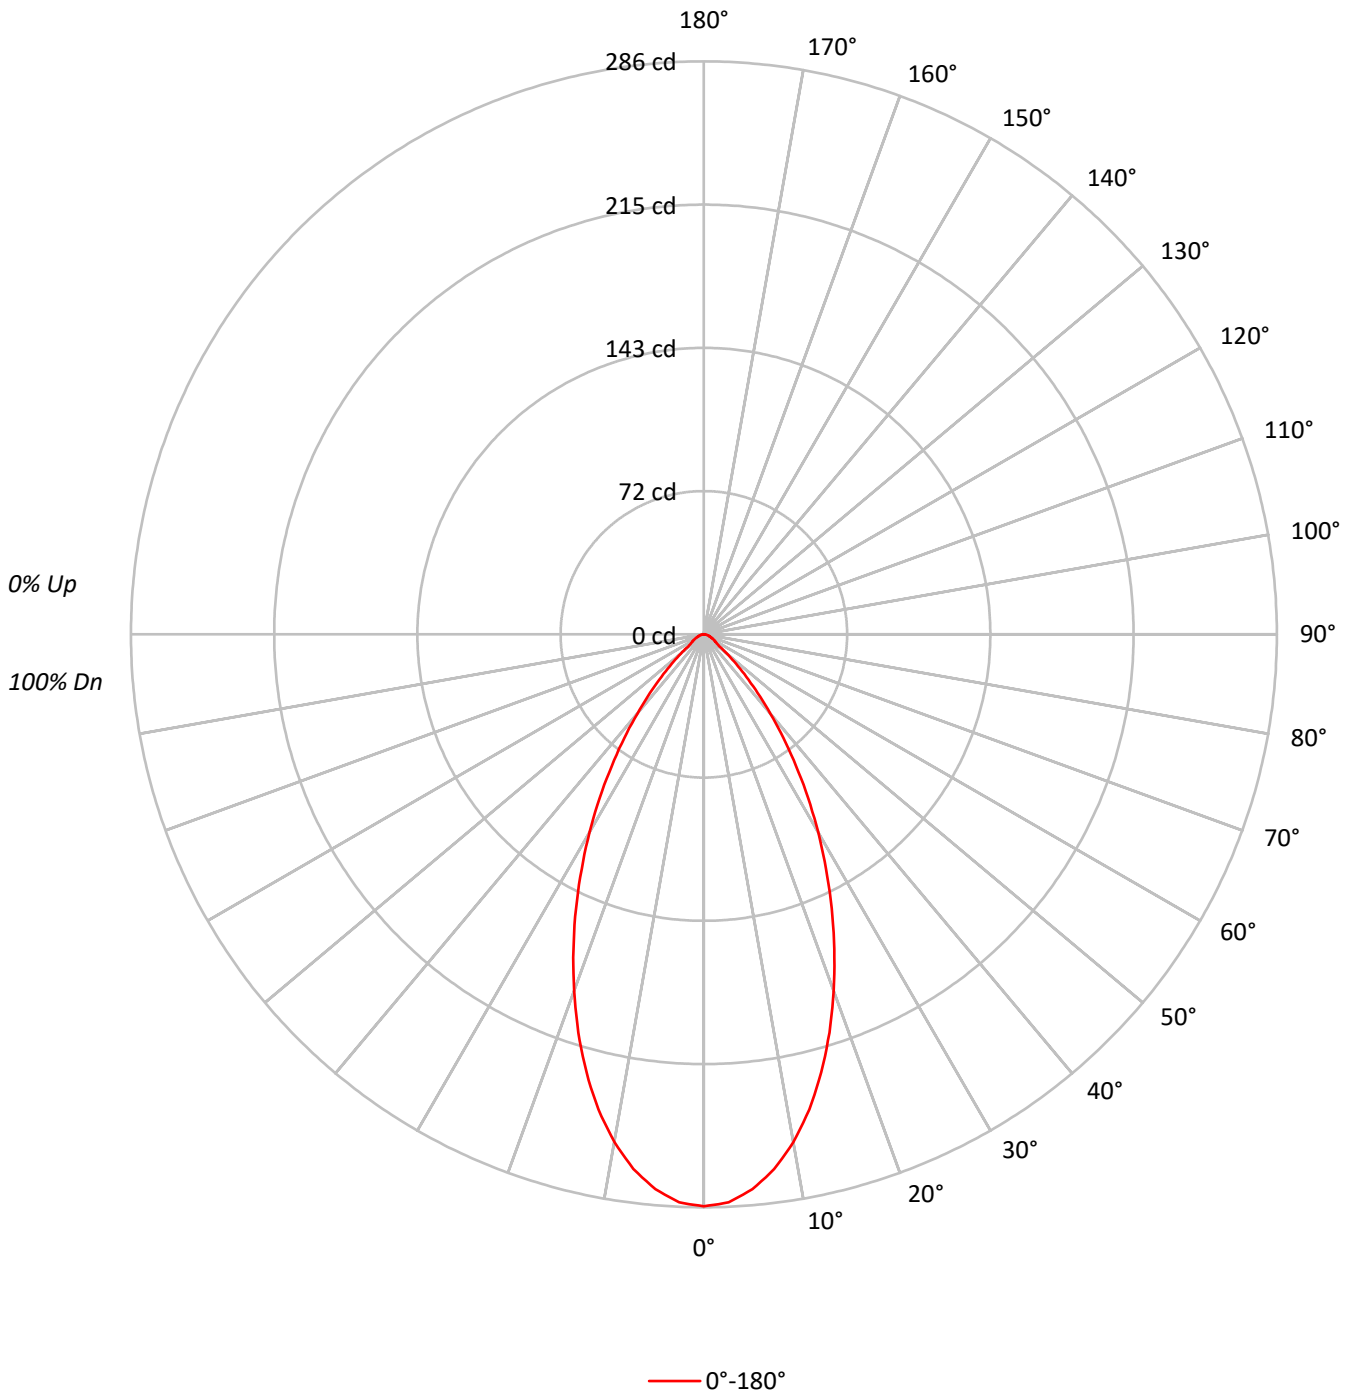



TEST NUMBER: P1298304  
 CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DLP1GPH\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92			
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72			
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	66	63	62			
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	58			
8	77	67	60	56	75	66	60	56	65	60	56	64	59	55	63	58	55	54			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	62605
5°	61193
10°	57291
15°	51396
20°	44197
25°	36534
30°	28891
35°	21442
40°	14771
45°	9272
50°	5083
55°	2982
60°	2675
65°	2283
70°	1988
75°	2033
80°	1768
85°	1761

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9272 cd/sqm



TEST NUMBER: P1298304

CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DLP1GPH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	25.9	10.5
10°-20°	62.9	25.5
20°-30°	69.0	27.9
30°-40°	50.2	20.3
40°-50°	23.7	9.6
50°-60°	7.8	3.1
60°-70°	4.4	1.8
70°-80°	2.4	1.0
80°-90°	0.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	157.7	63.9
0°-40°	208.0	84.2
0°-60°	239.5	97.0
0°-90°	247.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	247.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	286	
5°	278	26
15°	226	63
25°	151	69
35°	80	50
45°	30	24
55°	8	8
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1298304  
CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DLP1GPH\_2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	285.5
2.5°	283.8
5°	278.0
7.5°	269.2
10°	257.3
12.5°	243.0
15°	226.4
17.5°	208.4
20°	189.4
22.5°	170.1
25°	151.0
27.5°	132.0
30°	114.1
32.5°	96.7
35°	80.1
37.5°	65.2
40°	51.6
42.5°	39.7
45°	29.9
47.5°	21.7
50°	14.9
52.5°	9.8
55°	7.8
57.5°	6.8
60°	6.1
62.5°	5.1
65°	4.4
67.5°	3.7
70°	3.1
72.5°	2.7
75°	2.4
77.5°	1.7
80°	1.4
82.5°	1.0
85°	0.7
87.5°	0.3
90°	0.0

(END OF REPORT)