

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299400

Luminaire Tested: P3AS17R15W2N902765DE010 E3DLP1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299400
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R15W2N902765DE010 E3DLP1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 2700K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 327.0 lumens
Efficiency: N/A
Efficacy: 16.9 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299400
CATALOG NUMBER: P3AS17R15W2N902765DE010 E3DLP1GPH_2700K

Luminous Intensity Polar Plot

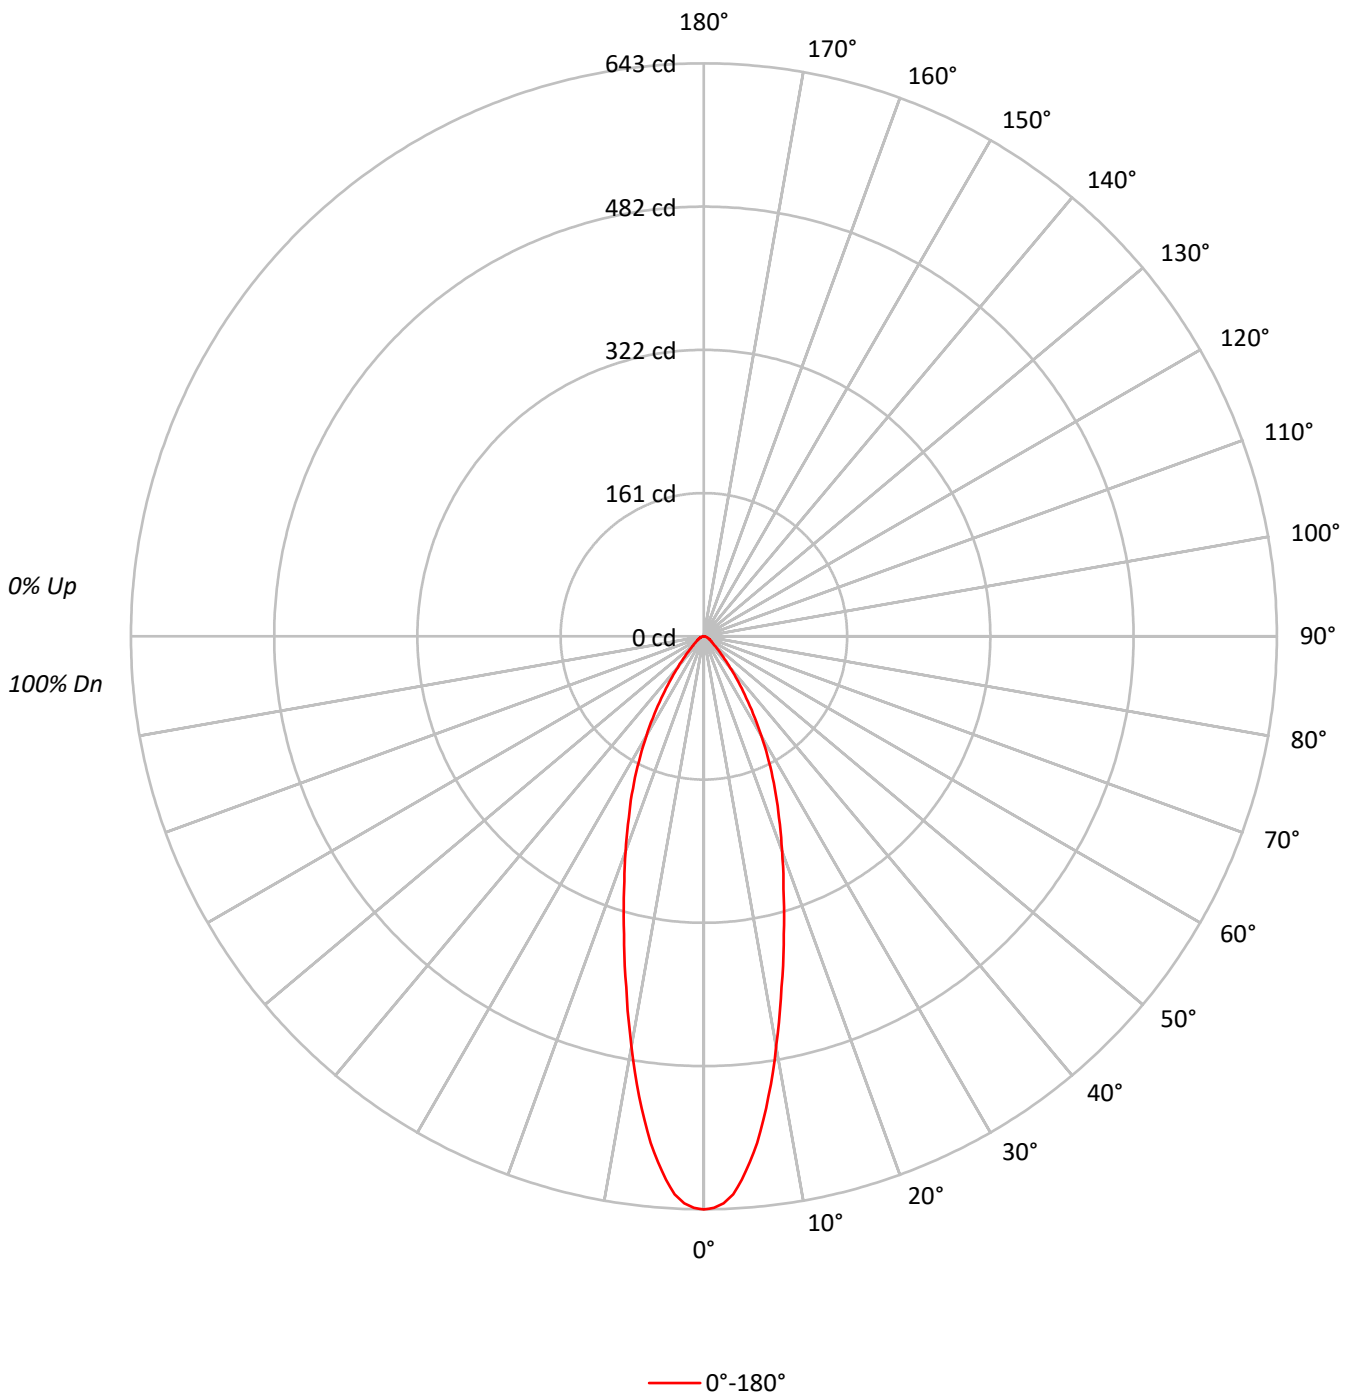



TEST NUMBER: P1299400
 CATALOG NUMBER: P3AS17R15W2N902765DE010 E3DLP1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86	86	86	86
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80	80	80	80
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75	75	75	75
5	93	84	78	74	91	83	78	74	81	77	73	80	76	73	78	75	72	70	70	70	70
6	88	79	73	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66	66	66	66
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62	62	62	62
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	68	63	60	59	59	59	59
9	77	68	62	58	76	67	62	58	66	61	58	65	61	57	64	60	57	56	56	56	56
10	74	64	59	55	73	64	59	55	63	58	55	62	58	55	62	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	141019
5°	130332
10°	104051
15°	78593
20°	59855
25°	45607
30°	32663
35°	21335
40°	13082
45°	7908
50°	5254
55°	4052
60°	3508
65°	3009
70°	2693
75°	2711
80°	2020
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7908 cd/sqm



TEST NUMBER: P1299400

CATALOG NUMBER: P3AS17R15W2N902765DE010 E3DLP1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.4	16.0
10°-20°	96.8	29.6
20°-30°	86.2	26.3
30°-40°	51.0	15.6
40°-50°	20.9	6.4
50°-60°	9.8	3.0
60°-70°	6.0	1.8
70°-80°	3.1	1.0
80°-90°	0.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	235.4	72.0
0°-40°	286.4	87.6
0°-60°	317.1	97.0
0°-90°	327.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	327.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	643	
5°	592	52
15°	346	97
25°	188	86
35°	80	51
45°	26	21
55°	11	10
65°	6	6
75°	3	3
85°	0	1
90°	0	



TEST NUMBER: P1299400
CATALOG NUMBER: P3AS17R15W2N902765DE010 E3DLP1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	643.1
1°	641.5
2°	636.7
3°	627.1
4°	611.2
5°	592.1
6°	571.4
7°	546.9
8°	521.5
9°	495.4
10°	467.3
12.5°	403.0
15°	346.2
17.5°	297.4
20°	256.5
22.5°	220.4
25°	188.5
27.5°	157.7
30°	129.0
32.5°	103.0
35°	79.7
37.5°	61.1
40°	45.7
42.5°	34.0
45°	25.5
47.5°	19.6
50°	15.4
52.5°	12.7
55°	10.6
57.5°	9.0
60°	8.0
62.5°	6.9
65°	5.8
67.5°	5.3
70°	4.2
72.5°	3.7
75°	3.2
77.5°	2.1
80°	1.6
82.5°	1.1
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)