

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301401

Luminaire Tested: P3AS17R50W2N902750DE010 E3DL1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301401
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R50W2N902750DE010 E3DL1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 597.0 lumens
Efficiency: N/A
Efficacy: 30.8 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301401
CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DL1GPH_2700K

Luminous Intensity Polar Plot

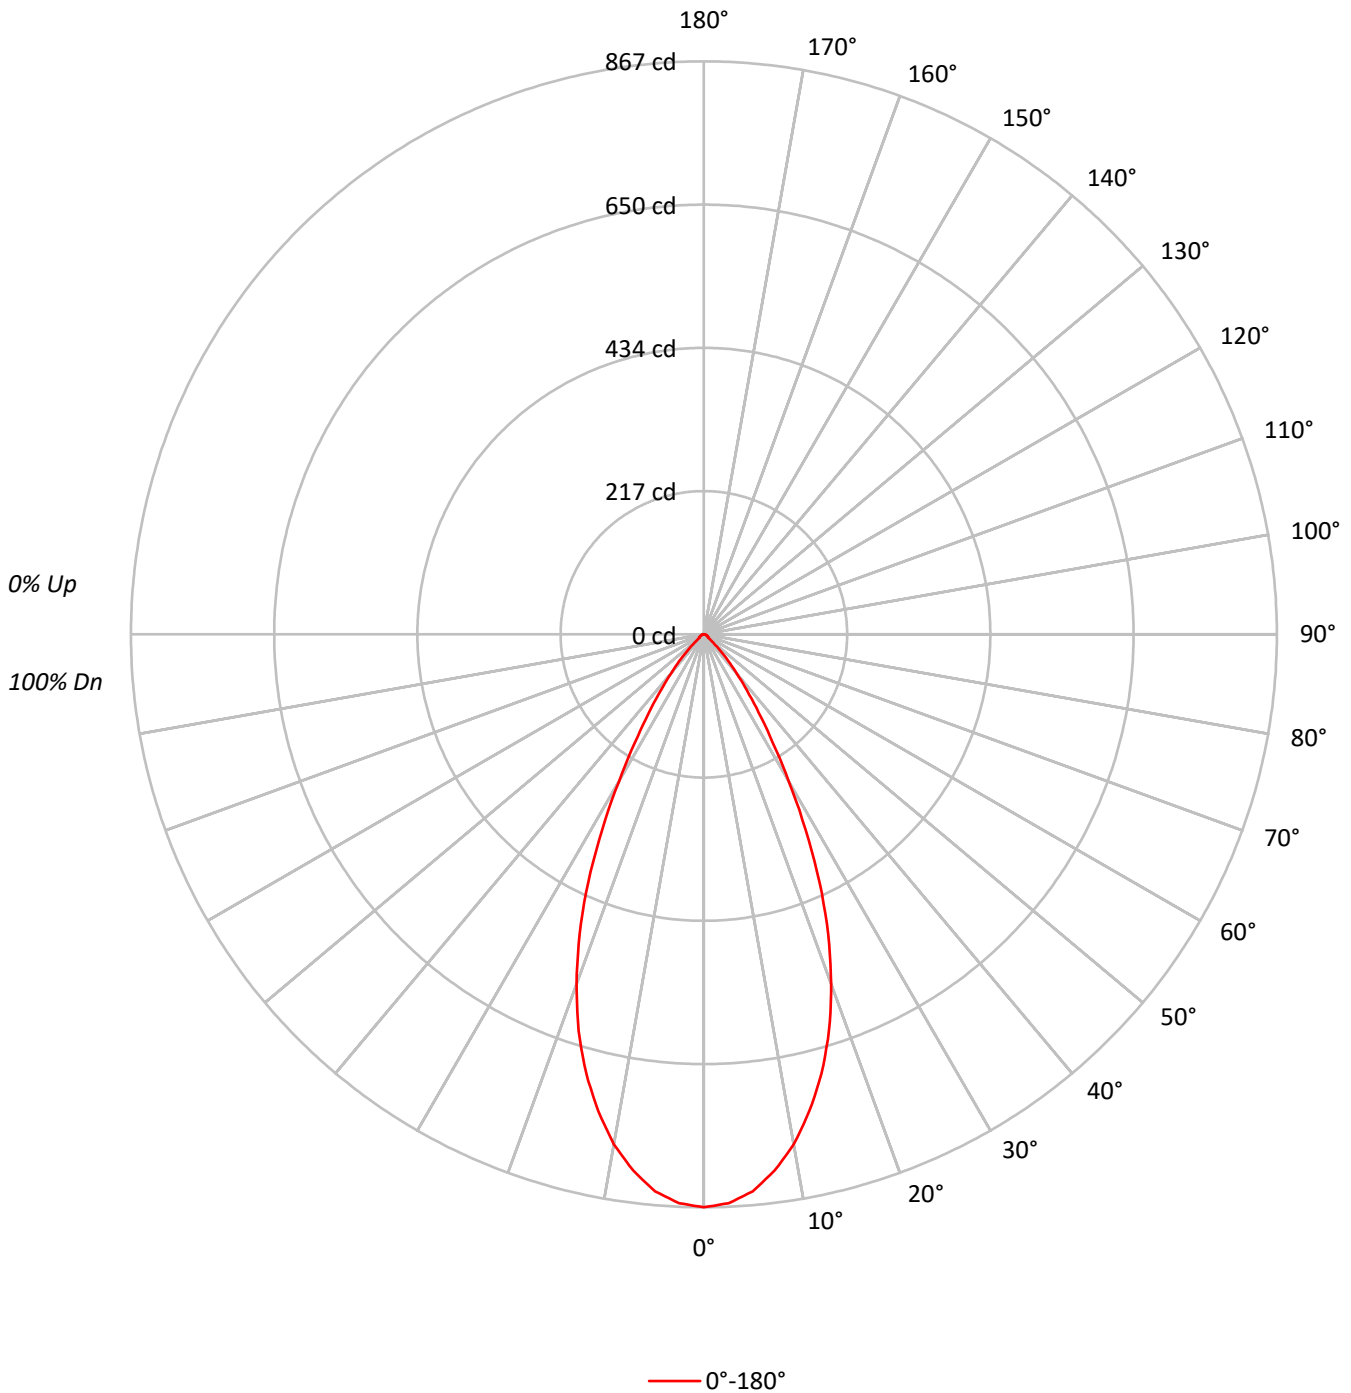



TEST NUMBER: P1301401

CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DL1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94	94	94	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87	87	87	87
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82	82	82	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	80	78	76	76	76	76
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72	72	72	72
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	75	72	69	67	67	67	67
7	85	76	70	66	84	75	70	66	74	69	66	73	69	65	72	68	65	64	64	64	64
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60	60	60	60
9	78	68	63	59	76	68	62	59	67	62	59	66	62	58	65	61	58	57	57	57	57
10	74	65	59	56	73	65	59	56	64	59	55	63	58	55	62	58	55	54	54	54	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	190072
5°	186242
10°	174457
15°	156164
20°	131425
25°	100312
30°	65175
35°	38655
40°	22328
45°	11195
50°	4162
55°	3250
60°	3026
65°	2750
70°	2693
75°	2711
80°	2652
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11195 cd/sqm



TEST NUMBER: P1301401

CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DL1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.7	13.2
10°-20°	190.2	31.9
20°-30°	186.6	31.3
30°-40°	94.0	15.7
40°-50°	29.7	5.0
50°-60°	7.7	1.3
60°-70°	5.5	0.9
70°-80°	3.4	0.6
80°-90°	1.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	455.6	76.3
0°-40°	549.6	92.1
0°-60°	587.0	98.3
0°-90°	597.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	597.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	867	
5°	846	79
15°	688	190
25°	415	187
35°	144	94
45°	36	30
55°	8	8
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1301401
CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	866.8
2.5°	861.5
5°	846.1
7.5°	818.5
10°	783.5
12.5°	738.4
15°	687.9
17.5°	629.5
20°	563.2
22.5°	491.5
25°	414.6
27.5°	332.8
30°	257.4
32.5°	193.7
35°	144.4
37.5°	106.7
40°	78.0
42.5°	55.2
45°	36.1
47.5°	20.7
50°	12.2
52.5°	9.0
55°	8.5
57.5°	7.4
60°	6.9
62.5°	6.4
65°	5.3
67.5°	4.8
70°	4.2
72.5°	3.7
75°	3.2
77.5°	2.7
80°	2.1
82.5°	1.6
85°	1.1
87.5°	0.5
90°	0.0

(END OF REPORT)