

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301435

Luminaire Tested: P3AS17R50W2N902750DE010 E3DLD1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301435
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R50W2N902750DE010 E3DLD1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 5000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 517.0 lumens
Efficiency: N/A
Efficacy: 26.6 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301435
CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DLD1GPH_5000K

Luminous Intensity Polar Plot

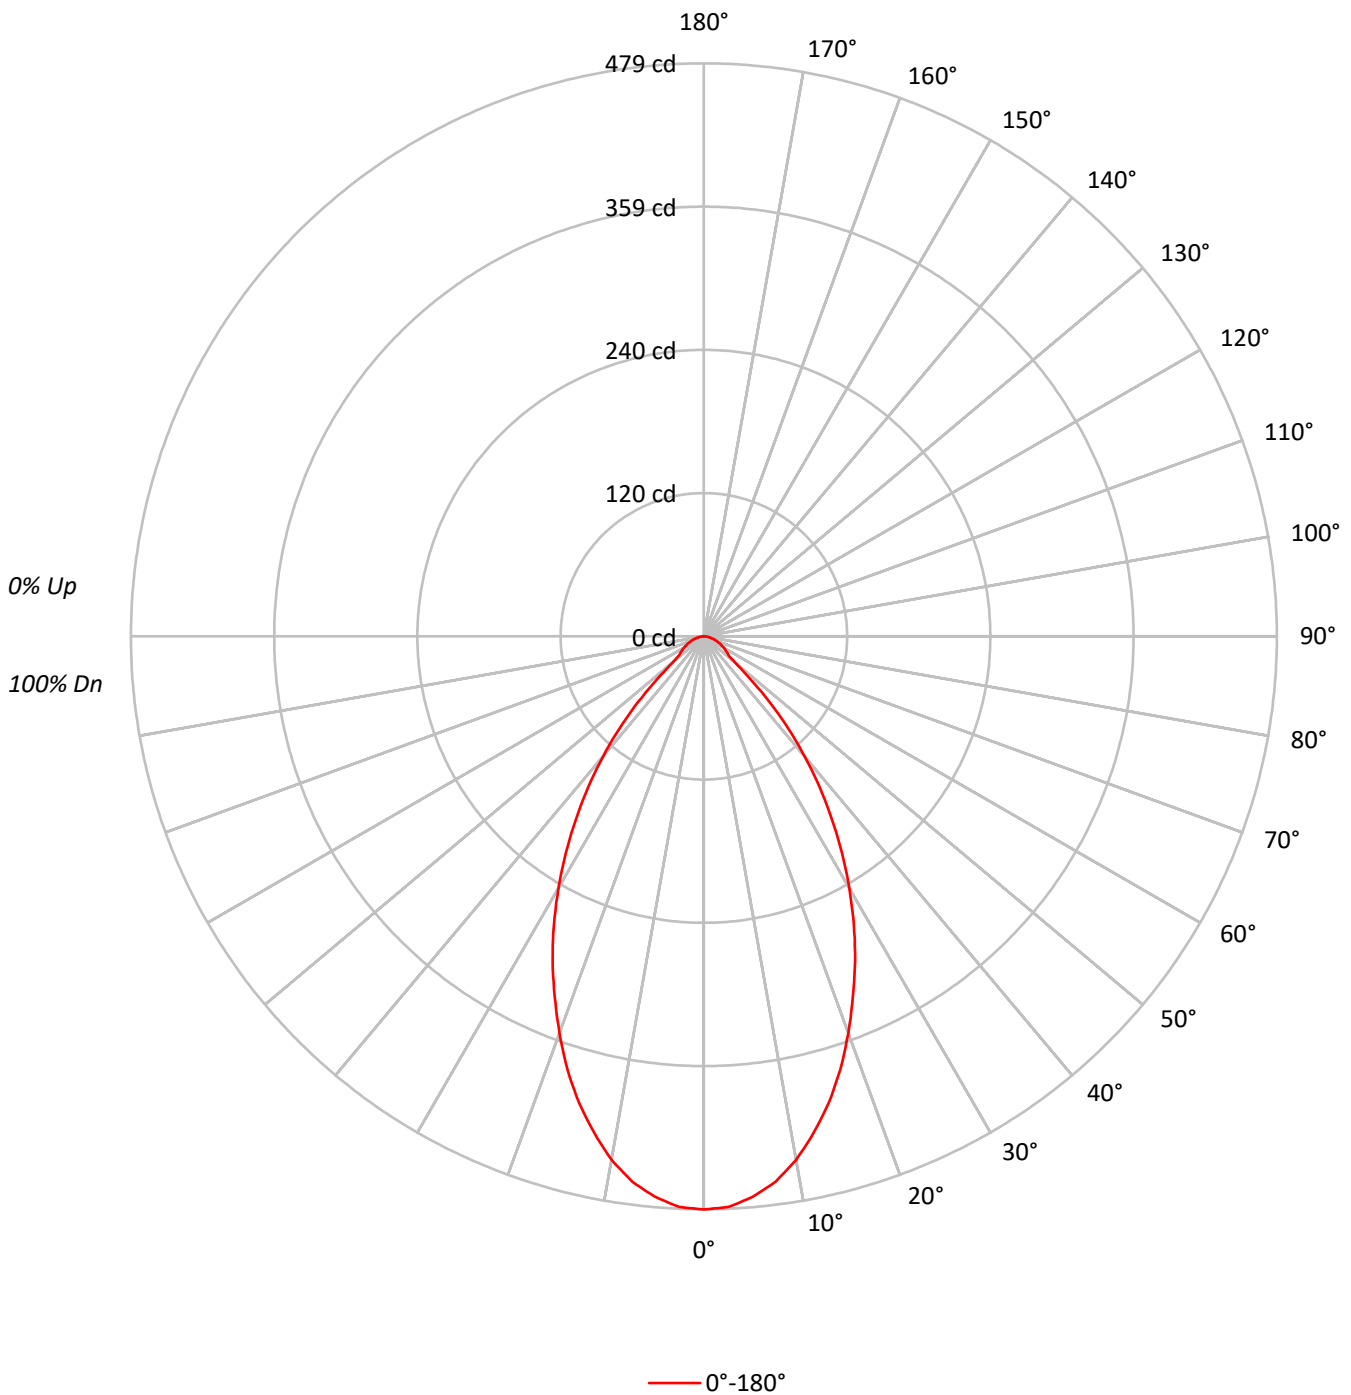



TEST NUMBER: P1301435

CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DLD1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.1	8.5
10°-20°	112.5	21.8
20°-30°	136.7	26.4
30°-40°	116.0	22.4
40°-50°	60.2	11.6
50°-60°	21.7	4.2
60°-70°	15.0	2.9
70°-80°	8.2	1.6
80°-90°	2.6	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	293.3	56.7
0°-40°	409.3	79.2
0°-60°	491.2	95.0
0°-90°	517.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	517.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	479	
5°	470	44
15°	404	113
25°	299	137
35°	186	116
45°	78	60
55°	24	22
65°	15	15
75°	8	8
85°	2	3
90°	0	



TEST NUMBER: P1301435
CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DLD1GPH_5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	479.1
2.5°	477.4
5°	470.3
7.5°	459.7
10°	444.3
12.5°	424.8
15°	403.6
17.5°	379.4
20°	352.9
22.5°	325.7
25°	299.2
27.5°	271.4
30°	243.1
32.5°	214.8
35°	186.5
37.5°	158.7
40°	131.0
42.5°	104.4
45°	77.9
47.5°	51.9
50°	33.6
52.5°	26.0
55°	23.6
57.5°	21.2
60°	19.5
62.5°	17.1
65°	15.3
67.5°	13.0
70°	11.2
72.5°	9.4
75°	7.7
77.5°	5.9
80°	4.7
82.5°	3.5
85°	2.4
87.5°	1.2
90°	0.0

(END OF REPORT)