

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302101

Luminaire Tested: P3AS17R60W2N902750DE010 E3DLP1GPH\_3500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1302101  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R60W2N902750DE010 E3DLP1GPH\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 3500K CCT AND, 90CRI ,  
E3DLP1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 432.0 lumens  
Efficiency: N/A  
Efficacy: 22.3 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1302101  
CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLP1GPH\_3500K

### Luminous Intensity Polar Plot

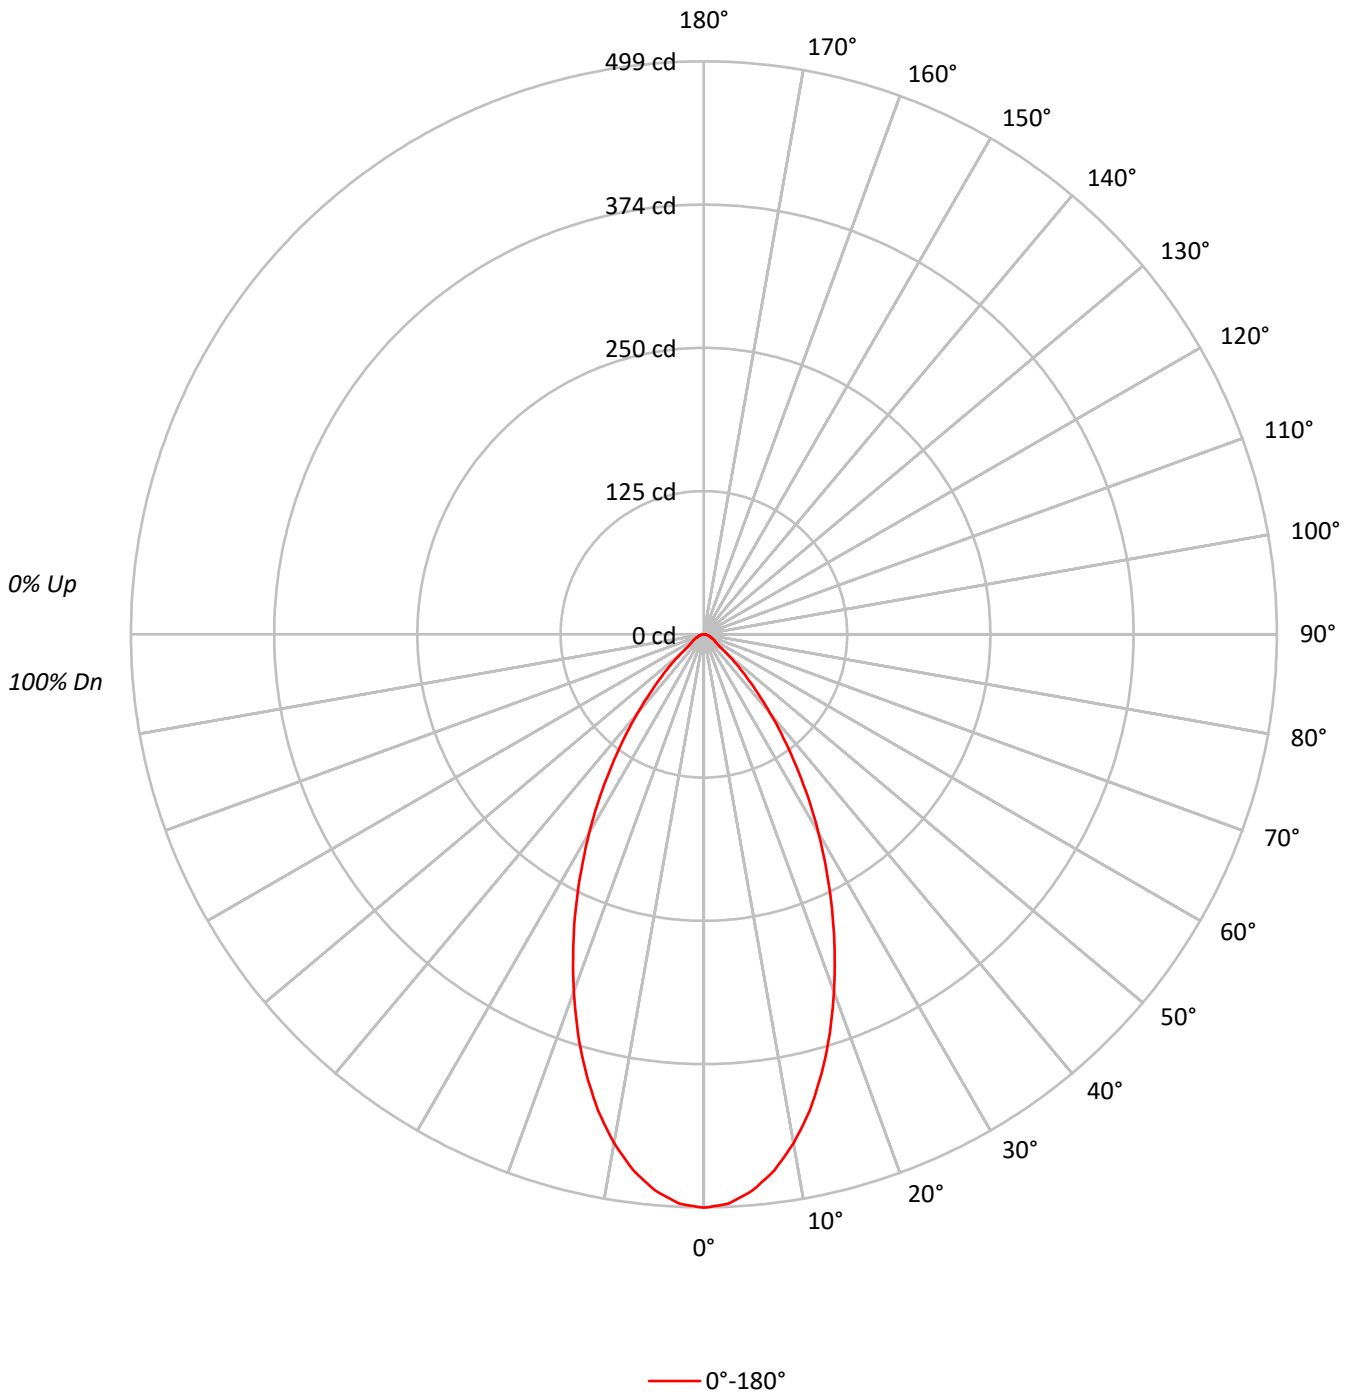



TEST NUMBER: P1302101  
 CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLP1GPH\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92			
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72			
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	66	63	62			
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	57			
8	77	67	60	56	75	66	60	56	65	60	56	64	59	55	63	58	55	54			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	109487
5°	107022
10°	100199
15°	89898
20°	77310
25°	63923
30°	50514
35°	37504
40°	25820
45°	16188
50°	8904
55°	5238
60°	4693
65°	3995
70°	3398
75°	3558
80°	3031
85°	3019

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16188 cd/sqm



TEST NUMBER: P1302101

CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLP1GPH\_3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	45.3	10.5
10°-20°	110.0	25.5
20°-30°	120.6	27.9
30°-40°	87.9	20.3
40°-50°	41.5	9.6
50°-60°	13.6	3.2
60°-70°	7.7	1.8
70°-80°	4.2	1.0
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	275.9	63.9
0°-40°	363.7	84.2
0°-60°	418.9	97.0
0°-90°	432.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	432.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	499	
5°	486	45
15°	396	110
25°	264	121
35°	140	88
45°	52	42
55°	14	14
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1302101  
CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLP1GPH\_3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	499.3
2.5°	496.3
5°	486.2
7.5°	470.8
10°	450.0
12.5°	425.1
15°	396.0
17.5°	364.5
20°	331.3
22.5°	297.4
25°	264.2
27.5°	230.9
30°	199.5
32.5°	169.2
35°	140.1
37.5°	114.0
40°	90.2
42.5°	69.5
45°	52.2
47.5°	38.0
50°	26.1
52.5°	17.2
55°	13.7
57.5°	11.9
60°	10.7
62.5°	8.9
65°	7.7
67.5°	6.5
70°	5.3
72.5°	4.7
75°	4.2
77.5°	3.0
80°	2.4
82.5°	1.8
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)