

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302200

Luminaire Tested: P3AS17R60W2N902765DE010 E3DL1GPH_6500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302200
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R60W2N902765DE010 E3DL1GPH_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 6500K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 621.0 lumens
Efficiency: N/A
Efficacy: 32.0 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302200
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1GPH_6500K

Luminous Intensity Polar Plot

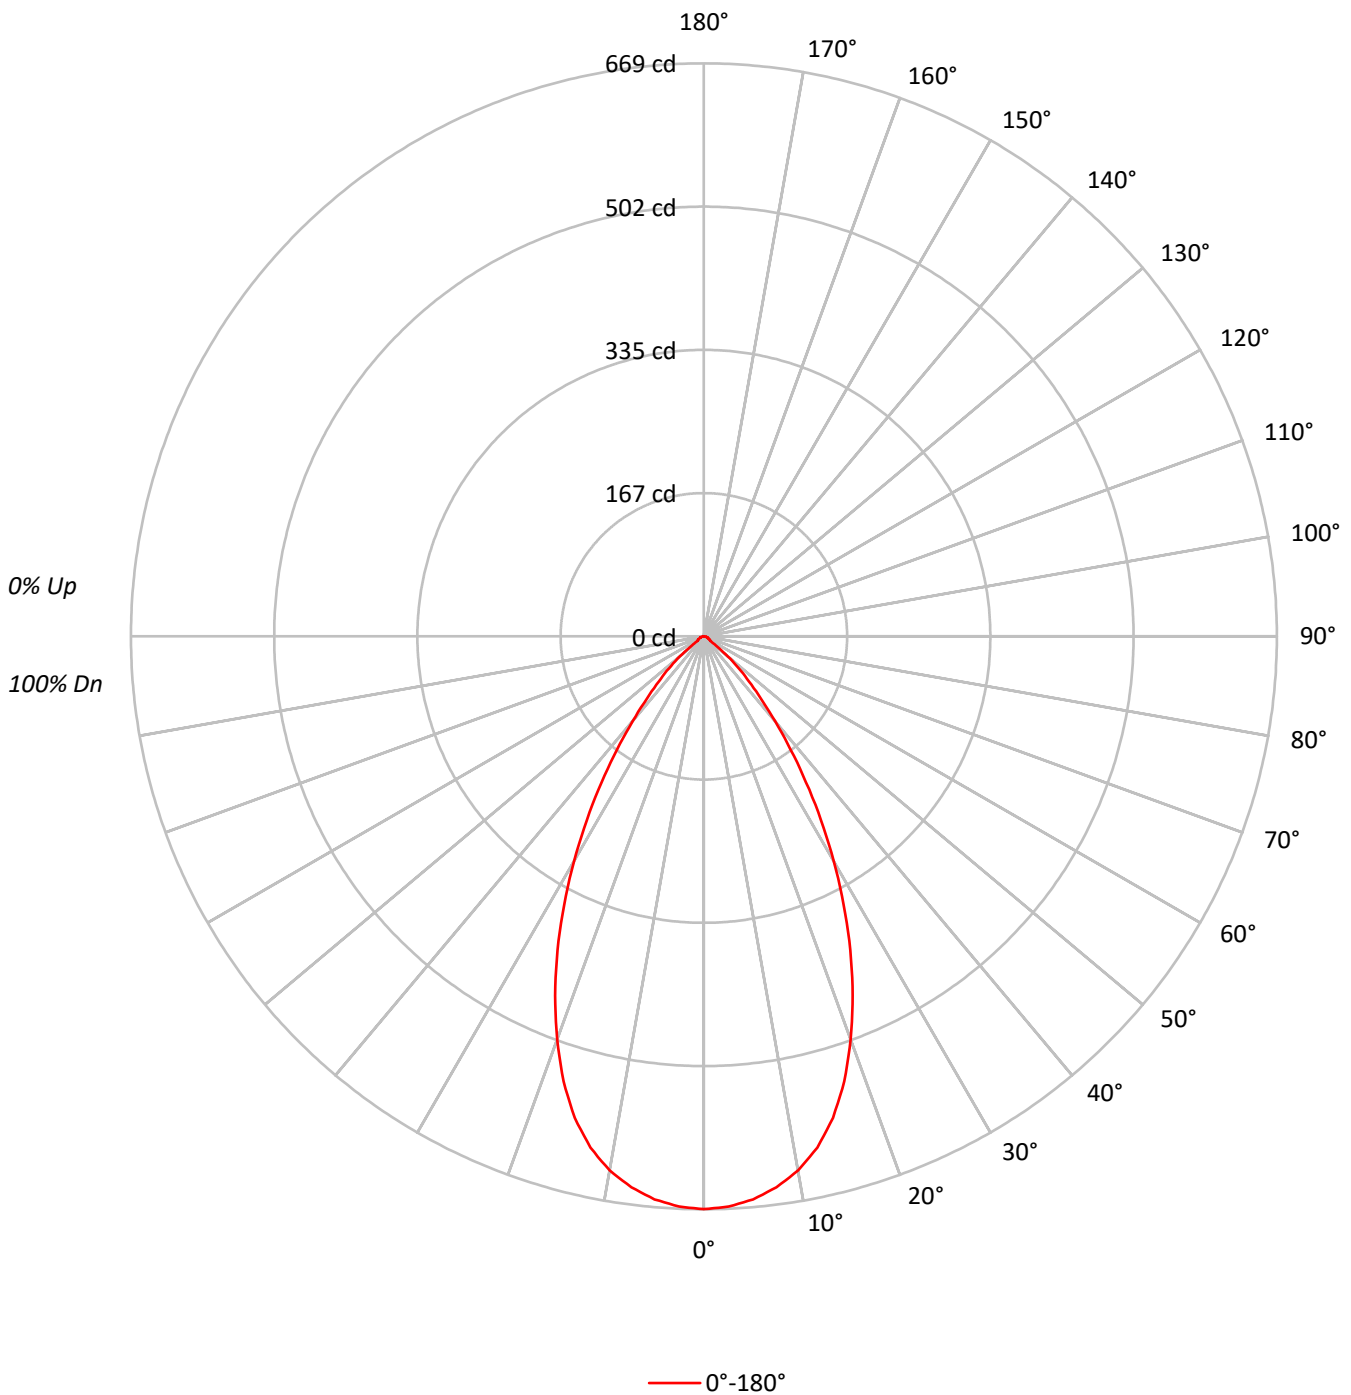



TEST NUMBER: P1302200

CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1GPH_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79			79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73			73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68			68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63			63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	67	63	60	59			59
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55			55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51			51
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48			48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	146633
5°	145256
10°	141013
15°	132123
20°	116934
25°	97820
30°	76670
35°	55626
40°	37012
45°	23072
50°	12486
55°	3594
60°	3377
65°	3061
70°	3013
75°	2965
80°	3031
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23072 cd/sqm



TEST NUMBER: P1302200

CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1GPH_6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.1	10.0
10°-20°	161.5	26.0
20°-30°	184.0	29.6
30°-40°	130.5	21.0
40°-50°	59.2	9.5
50°-60°	12.6	2.0
60°-70°	6.1	1.0
70°-80°	3.7	0.6
80°-90°	1.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	407.6	65.6
0°-40°	538.2	86.7
0°-60°	609.9	98.2
0°-90°	621.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	621.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	669	
5°	660	62
15°	582	161
25°	404	184
35°	208	131
45°	74	59
55°	9	13
65°	6	6
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1302200
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1GPH_6500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	668.7
2.5°	666.4
5°	659.9
7.5°	648.7
10°	633.3
12.5°	611.5
15°	582.0
17.5°	544.8
20°	501.1
22.5°	453.9
25°	404.3
27.5°	353.5
30°	302.8
32.5°	254.4
35°	207.8
37.5°	166.4
40°	129.3
42.5°	98.0
45°	74.4
47.5°	55.5
50°	36.6
52.5°	17.1
55°	9.4
57.5°	8.3
60°	7.7
62.5°	7.1
65°	5.9
67.5°	5.3
70°	4.7
72.5°	4.1
75°	3.5
77.5°	3.0
80°	2.4
82.5°	1.8
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)