

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273757

Luminaire Tested: P3A09R459830DE010 E3D1MW

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1273757  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A09R459830DE010 E3D1MW  
Description: 3in Adjustable LED luminaire with, R45 optic, 3000K CCT AND, 98CRI , E3D1MW TRIM  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 733.0 lumens  
Efficiency: N/A  
Efficacy: 66.6 lumens/watt  
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 11  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1273757  
CATALOG NUMBER: P3A09R459830DE010 E3D1MW

### Luminous Intensity Polar Plot

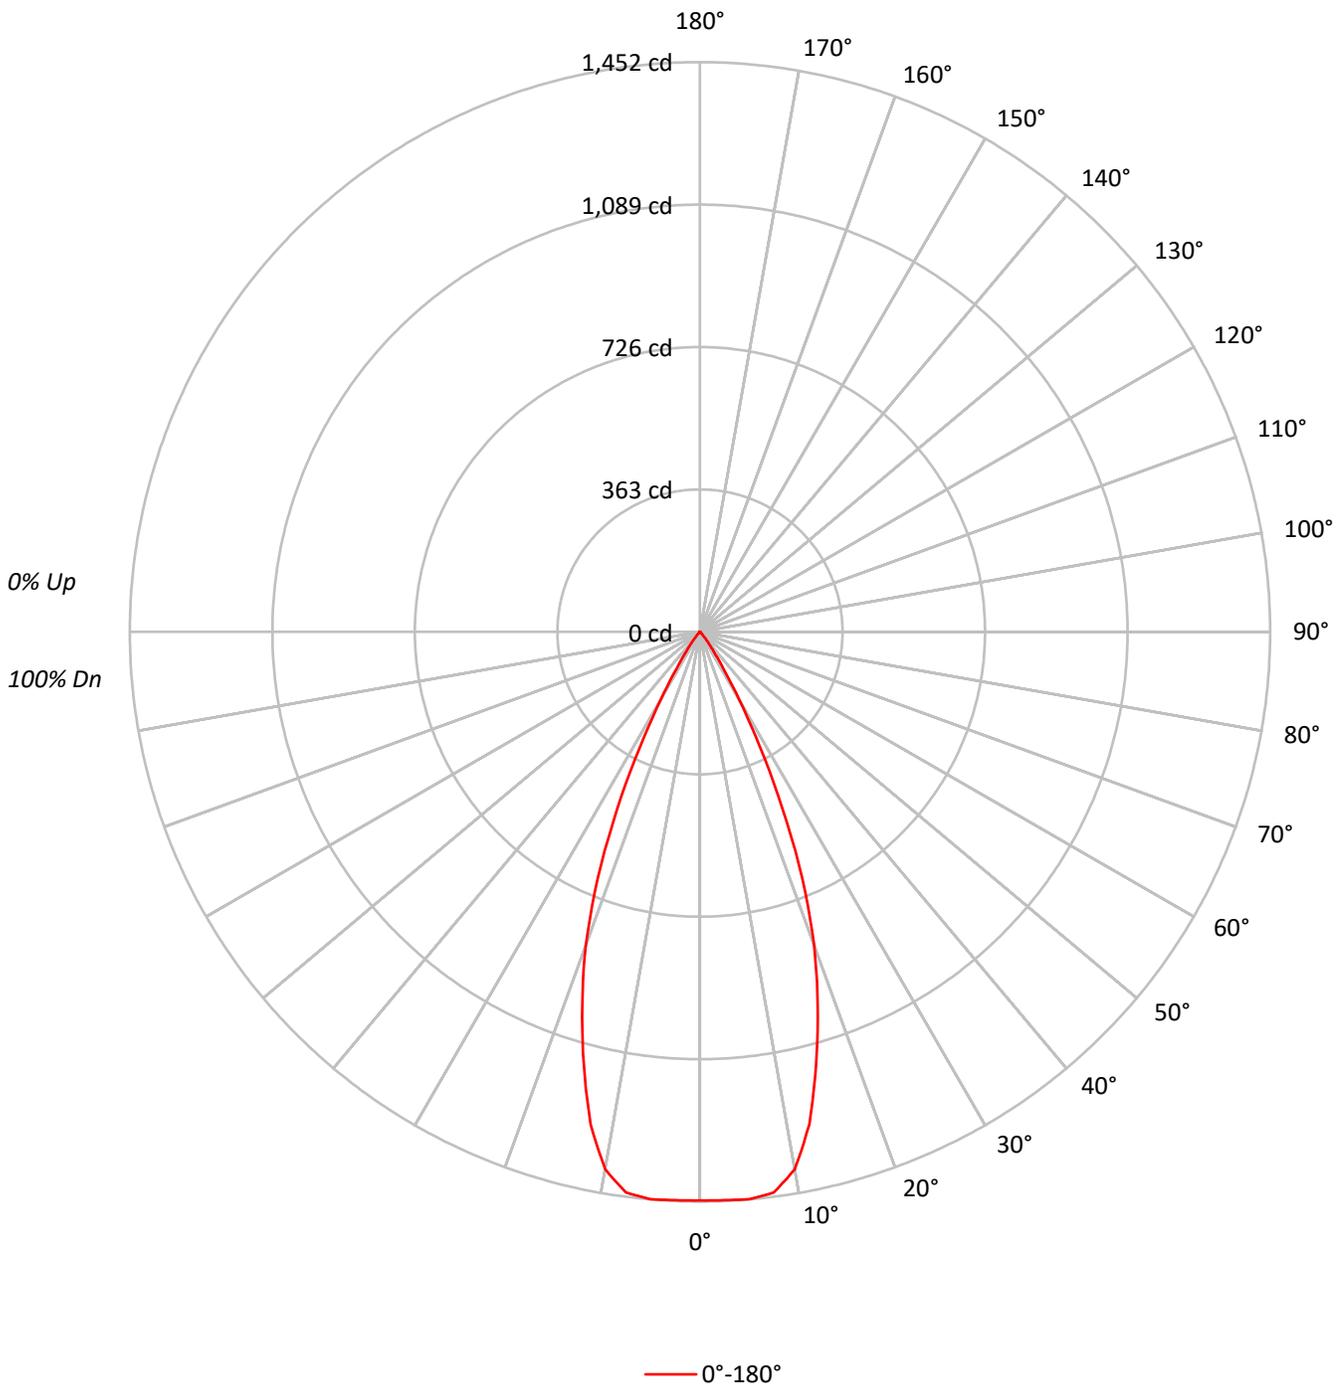



TEST NUMBER: P1273757  
 CATALOG NUMBER: P3A09R459830DE010 E3D1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	96	93	91	94	91	89	92	90	88	87	87	87	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	88	86	84	83	83	83	83
5	98	91	86	82	96	90	85	82	88	84	81	87	83	81	85	82	80	79	79	79	79
6	94	87	82	78	93	86	81	78	85	80	77	83	80	77	82	79	76	75	75	75	75
7	90	83	78	74	89	82	78	74	81	77	74	80	76	74	79	76	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	64	64	64	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	317803
5°	319502
10°	309680
15°	259502
20°	198374
25°	120757
30°	50236
35°	16088
40°	5009
45°	1023
50°	751
55°	841
60°	702
65°	830
70°	705
75°	932
80°	631
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1023 cd/sqm



TEST NUMBER: P1273757  
 CATALOG NUMBER: P3A09R459830DE010 E3D1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	136.9	18.7
10°-20°	314.2	42.9
20°-30°	226.2	30.9
30°-40°	47.1	6.4
40°-50°	4.3	0.6
50°-60°	1.8	0.2
60°-70°	1.4	0.2
70°-80°	0.9	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	677.3	92.4
0°-40°	724.3	98.8
0°-60°	730.4	99.7
0°-90°	733.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	733.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1449	
5°	1452	137
15°	1143	314
25°	499	226
35°	60	47
45°	3	4
55°	2	2
65°	2	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1273757  
CATALOG NUMBER: P3A09R459830DE010 E3D1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1449.3
2.5°	1449.8
5°	1451.5
7.5°	1441.1
10°	1390.8
12.5°	1285.8
15°	1143.1
17.5°	997.2
20°	850.1
22.5°	681.2
25°	499.1
27.5°	329.1
30°	198.4
32.5°	111.0
35°	60.1
37.5°	33.9
40°	17.5
42.5°	7.7
45°	3.3
47.5°	2.2
50°	2.2
52.5°	2.2
55°	2.2
57.5°	1.6
60°	1.6
62.5°	1.6
65°	1.6
67.5°	1.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)