

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P400564

Luminaire Tested: **TT-D3-750-U-T4-PM**

Issue Date: 5/19/2020

Test Information

Test Method: LM-79-08
Report Number: P400564
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1908-473-26)
Test Lab: INNOVATION CENTER
Issue Date: 5/19/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: TT-D3-750-U-T4-PM
Description: TOPTIER LED SITE LUMINAIRE
5000K, 70 CRI LEDS AND DRIVE LANE DISTRIBUTION
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5347.9 lumens
Efficiency: N/A
Efficacy: 109.6 lumens/watt
Luminous Opening: Circular (Dia: 1.12' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U0 - G3


Input Watts (W): 48.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P400564
 CATALOG NUMBER: TT-D3-750-U-T4-PM

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

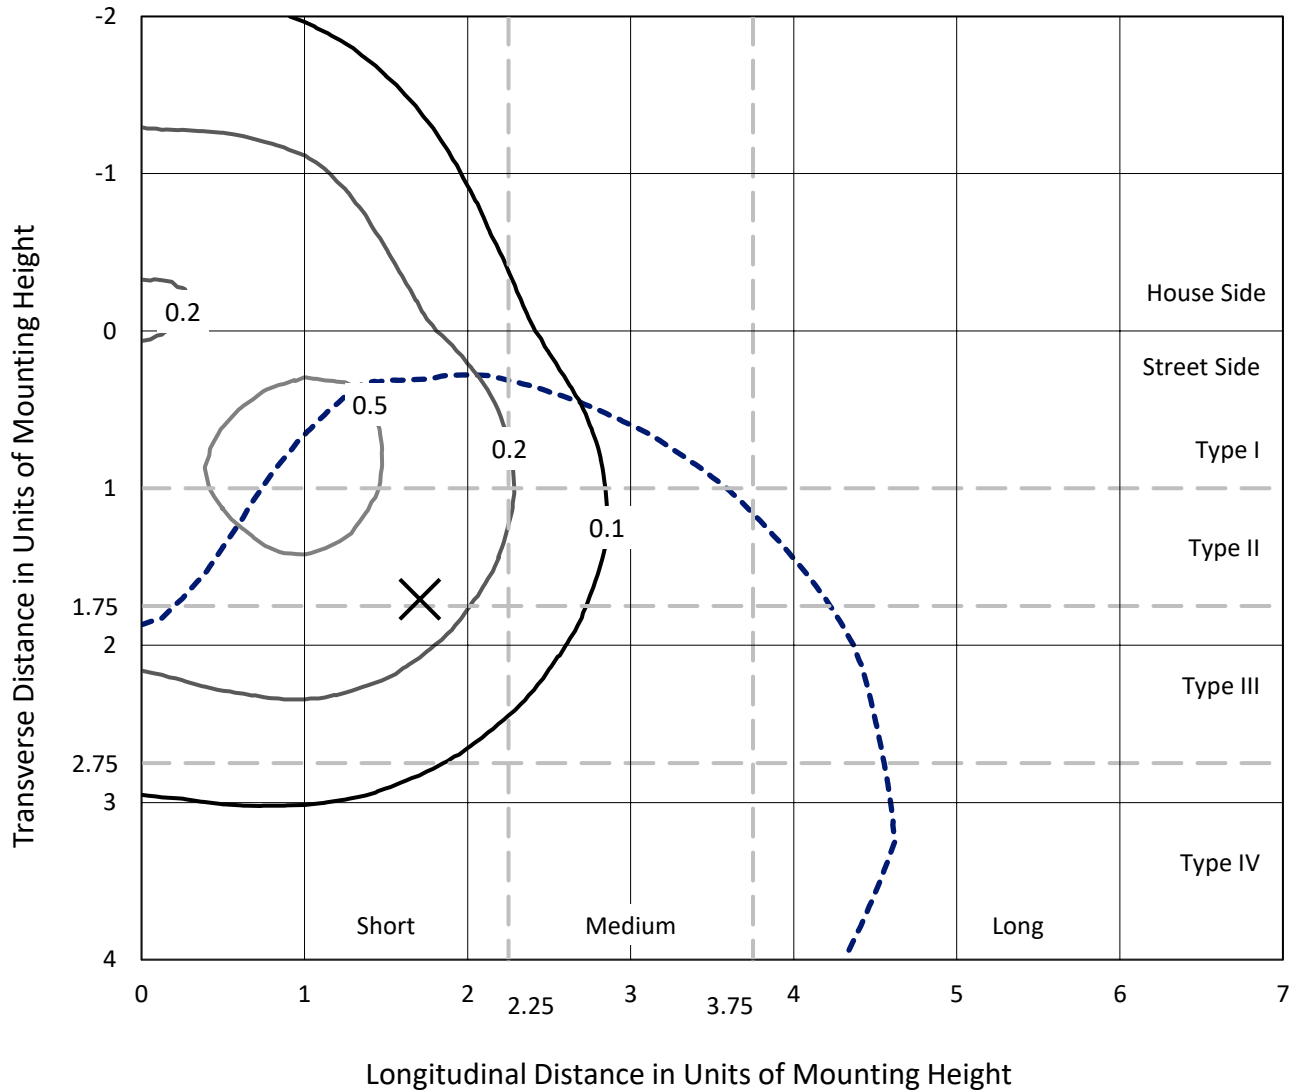

Based on 25 foot mounting height. Maximum calculated value = 0.7 fc
 Type IV - Short - N/A

REPORT NUMBER: P400564
CATALOG NUMBER: TT-D3-750-U-T4-PM

Luminous Intensity Polar Plot

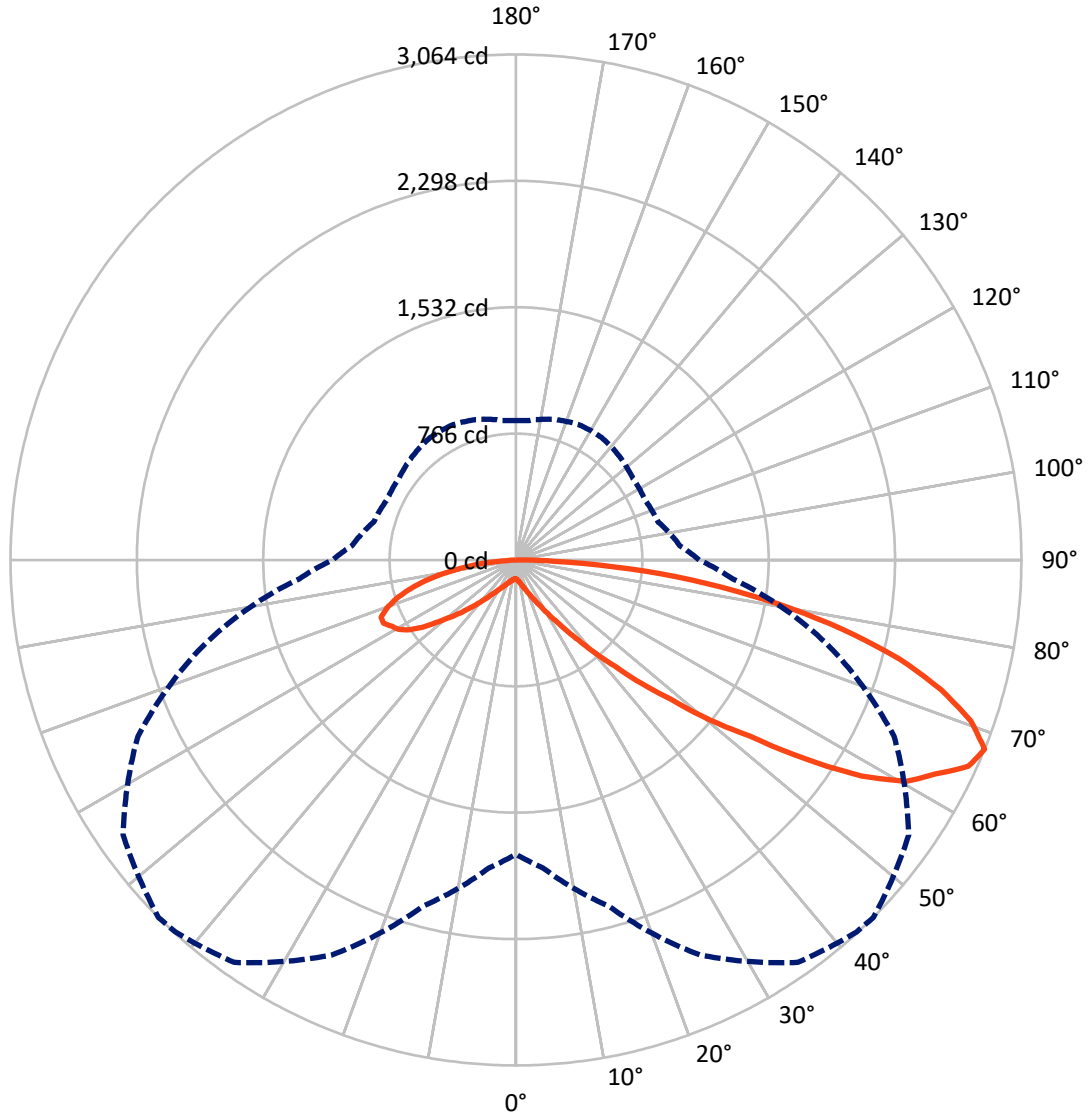

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P400564
 CATALOG NUMBER: TT-D3-750-U-T4-PM


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1558.4	0.0	1558.4
	% Fixture	29.1	0.0	29.1
Street Side	Lumens	3789.6	0.0	3789.6
	% Fixture	70.9	0.0	70.9
Total	Lumens	5347.9	0.0	5347.9
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	11.9	0.2
10°-20°	44.4	0.8
20°-30°	104.9	2.0
30°-40°	237.4	4.4
40°-50°	529.3	9.9
50°-60°	1064.2	19.9
60°-70°	1563.0	29.2
70°-80°	1374.4	25.7
80°-90°	418.4	7.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	5347.9	100.0
0°-180°	5347.9	100.0

Coefficient of Utilization

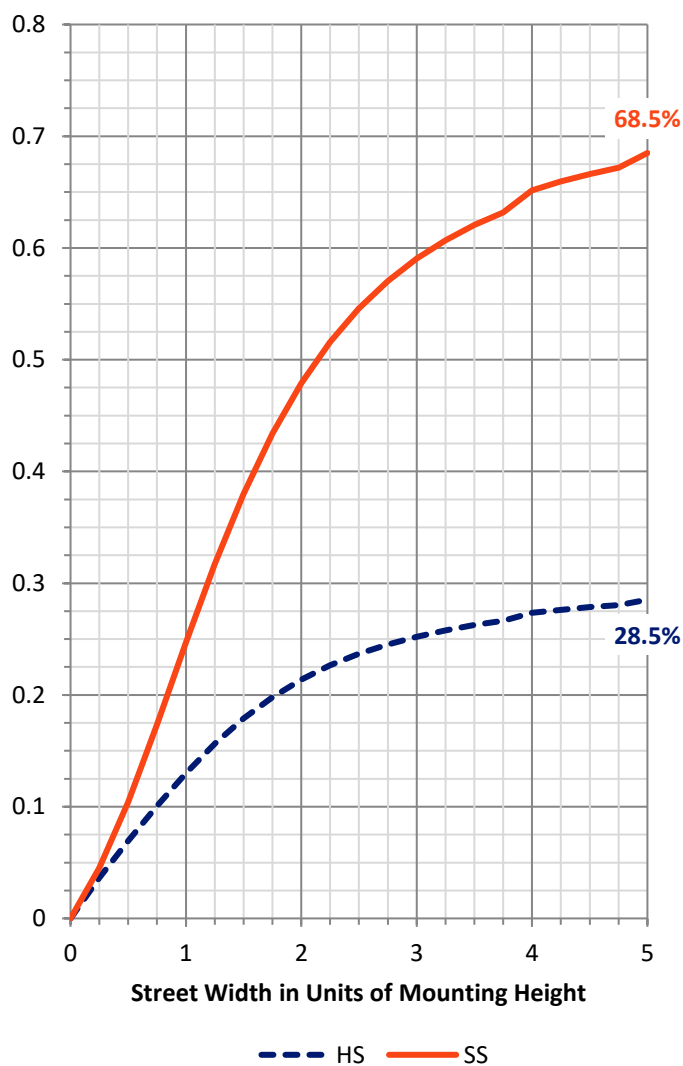


REPORT NUMBER: P400564
 CATALOG NUMBER: TT-D3-750-U-T4-PM

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	93.4	1.7			
FM (30°-60°)	1252.4	23.4			
FH (60°-80°)	2133.8	39.9			G2/5000
FVH (80°-90°)	310.0	5.8			G3/500
BL (0°-30°)	67.8	1.3	B0/110		
BM (30°-60°)	578.5	10.8	B1/1000		
BH (60°-80°)	803.6	15.0	B2/1000		G2/1000
BVH (80°-90°)	108.4	2.0			G2/225
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G3
 Type IV Short

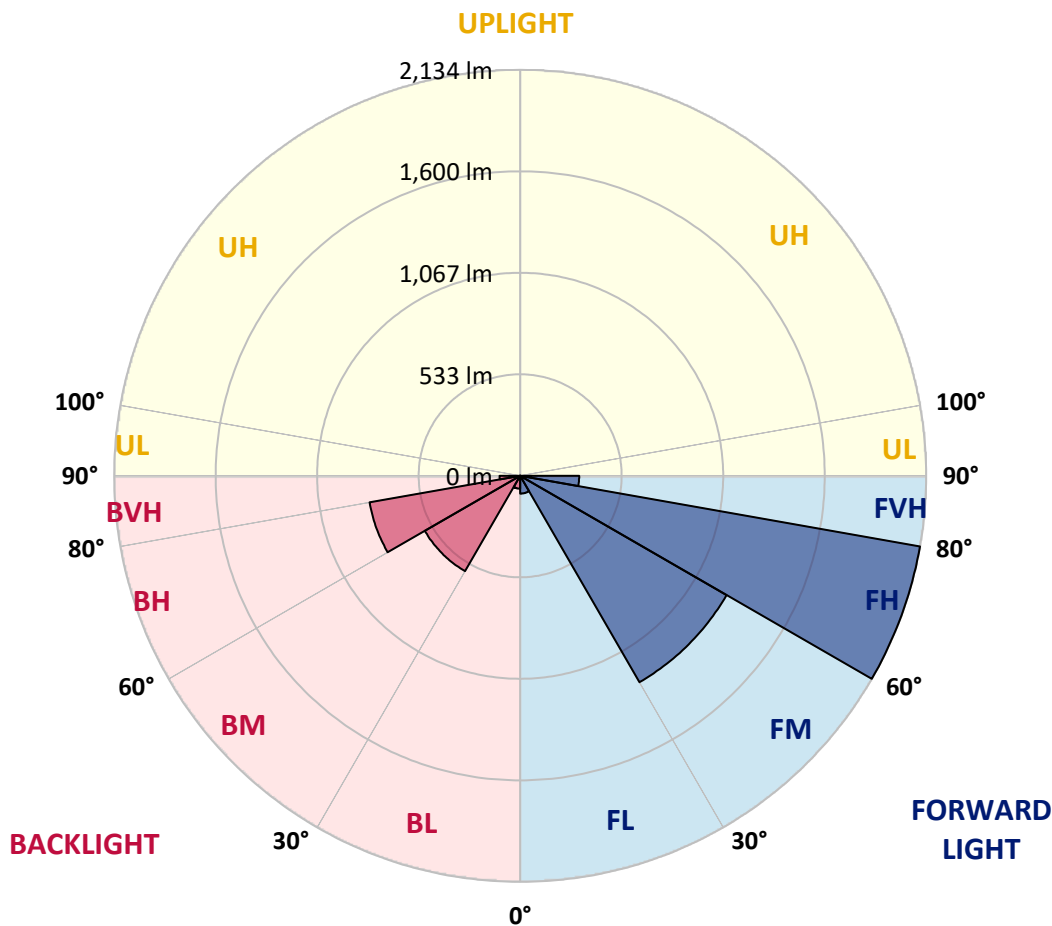



REPORT NUMBER: P400564
 CATALOG NUMBER: TT-D3-750-U-T4-PM

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	42.5°	45°	55°	65°	75°	85°
0°	116.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0
2.5°	121.0	120.0	120.0	120.0	119.0	119.0	119.0	119.0	118.0	118.0	118.0
5°	128.0	127.0	128.0	126.0	125.0	125.0	124.0	124.0	123.0	122.0	121.0
7.5°	138.0	137.0	137.0	135.0	134.0	133.0	133.0	131.0	130.0	128.0	126.0
10°	149.0	149.0	148.0	147.0	145.0	143.0	143.0	140.0	139.0	136.0	133.0
12.5°	162.0	162.0	162.0	160.0	158.0	157.0	155.0	153.0	150.0	145.0	142.0
15°	178.0	178.0	178.0	176.0	174.0	172.0	171.0	167.0	162.0	157.0	151.0
17.5°	198.0	196.0	196.0	194.0	192.0	191.0	189.0	185.0	178.0	172.0	164.0
20°	220.0	219.0	218.0	218.0	216.0	214.0	213.0	207.0	199.0	188.0	178.0
22.5°	245.0	244.0	244.0	246.0	245.0	242.0	242.0	233.0	222.0	209.0	194.0
25°	276.0	275.0	277.0	281.0	281.0	279.0	276.0	267.0	251.0	233.0	215.0
27.5°	310.0	309.0	313.0	320.0	322.0	319.0	317.0	307.0	289.0	265.0	239.0
30°	351.0	352.0	363.0	371.0	376.0	374.0	373.0	362.0	333.0	305.0	271.0
32.5°	401.0	398.0	412.0	425.0	434.0	439.0	436.0	423.0	398.0	354.0	311.0
35°	454.0	455.0	472.0	491.0	512.0	514.0	520.0	507.0	473.0	421.0	361.0
37.5°	523.0	515.0	537.0	573.0	598.0	620.0	616.0	608.0	568.0	499.0	417.0
40°	585.0	583.0	614.0	664.0	710.0	742.0	746.0	736.0	683.0	585.0	477.0
42.5°	656.0	662.0	705.0	774.0	844.0	890.0	879.0	874.0	812.0	687.0	559.0
45°	728.0	748.0	803.0	903.0	985.0	1051.0	1070.0	1053.0	977.0	848.0	663.0
47.5°	815.0	842.0	910.0	1045.0	1179.0	1256.0	1260.0	1311.0	1196.0	1003.0	771.0
50°	930.0	942.0	1037.0	1202.0	1386.0	1494.0	1525.0	1526.0	1411.0	1159.0	893.0
52.5°	1043.0	1052.0	1177.0	1390.0	1640.0	1763.0	1770.0	1809.0	1652.0	1411.0	1068.0
55°	1179.0	1175.0	1347.0	1603.0	1898.0	2077.1	2129.1	2182.1	1982.1	1610.0	1168.0
57.5°	1311.0	1305.0	1512.0	1848.0	2251.1	2429.1	2472.1	2434.1	2137.1	1693.0	1217.0
60°	1433.0	1454.0	1706.0	2119.1	2524.1	2694.1	2723.1	2620.1	2237.1	1757.0	1248.0
62.5°	1560.0	1602.0	1907.1	2345.1	2733.1	2855.1	2857.1	2736.1	2404.1	1881.0	1349.0
65°	1679.0	1746.0	2063.1	2538.1	2879.1	3001.1	3015.1	2906.1	2568.1	1989.1	1366.0
67.5°	1784.0	1873.0	2171.1	2642.1	2978.1	3057.1	3064.1	2907.1	2529.1	1945.1	1319.0
70°	1869.0	1941.1	2238.1	2644.1	2909.1	2931.1	2926.1	2759.1	2421.1	1858.0	1240.0
72.5°	1902.1	1961.1	2206.1	2520.1	2706.1	2701.1	2697.1	2543.1	2243.1	1713.0	1126.0
75°	1855.0	1872.0	2031.1	2255.1	2373.1	2401.1	2405.1	2266.1	1968.1	1498.0	966.0
77.5°	1661.0	1652.0	1774.0	1922.1	2011.1	2031.1	2027.1	1911.1	1650.0	1245.0	810.0
80°	1317.0	1336.0	1412.0	1510.0	1599.0	1621.0	1607.0	1519.0	1284.0	971.0	622.0
82.5°	921.0	944.0	1008.0	1082.0	1149.0	1149.0	1162.0	1077.0	910.0	697.0	435.0
85°	497.0	484.0	554.0	638.0	686.0	695.0	700.0	672.0	563.0	421.0	258.0
87.5°	82.0	88.0	109.0	167.0	190.0	220.0	234.0	183.0	111.0	71.0	52.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P400564
 CATALOG NUMBER: TT-D3-750-U-T4-PM

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	116.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0
2.5°	118.0	117.0	116.0	115.0	115.0	114.0	114.0	114.0	115.0	115.0	115.0
5°	121.0	120.0	119.0	118.0	116.0	116.0	116.0	116.0	116.0	116.0	116.0
7.5°	126.0	124.0	123.0	121.0	119.0	119.0	118.0	118.0	118.0	119.0	118.0
10°	132.0	130.0	128.0	125.0	124.0	123.0	122.0	122.0	123.0	123.0	122.0
12.5°	139.0	138.0	134.0	131.0	129.0	128.0	127.0	128.0	127.0	128.0	128.0
15°	149.0	146.0	141.0	138.0	135.0	134.0	133.0	134.0	134.0	135.0	134.0
17.5°	160.0	156.0	151.0	146.0	142.0	141.0	141.0	141.0	142.0	143.0	142.0
20°	173.0	168.0	161.0	155.0	151.0	150.0	150.0	151.0	152.0	153.0	153.0
22.5°	186.0	182.0	172.0	164.0	162.0	161.0	160.0	162.0	164.0	165.0	166.0
25°	206.0	198.0	186.0	177.0	173.0	173.0	174.0	176.0	177.0	179.0	178.0
27.5°	227.0	218.0	203.0	191.0	188.0	187.0	189.0	191.0	195.0	195.0	194.0
30°	256.0	241.0	222.0	211.0	203.0	204.0	207.0	210.0	214.0	216.0	216.0
32.5°	289.0	273.0	247.0	230.0	226.0	227.0	228.0	233.0	237.0	241.0	238.0
35°	332.0	312.0	280.0	261.0	251.0	250.0	254.0	260.0	264.0	266.0	266.0
37.5°	379.0	353.0	313.0	297.0	285.0	284.0	285.0	290.0	295.0	297.0	301.0
40°	436.0	404.0	357.0	331.0	322.0	320.0	324.0	331.0	331.0	334.0	335.0
42.5°	506.0	465.0	413.0	379.0	368.0	368.0	367.0	373.0	373.0	373.0	371.0
45°	595.0	549.0	481.0	446.0	427.0	417.0	420.0	416.0	415.0	418.0	409.0
47.5°	681.0	623.0	543.0	505.0	486.0	480.0	469.0	466.0	461.0	461.0	448.0
50°	781.0	709.0	632.0	578.0	560.0	543.0	534.0	520.0	505.0	502.0	497.0
52.5°	948.0	858.0	737.0	679.0	633.0	616.0	595.0	577.0	559.0	545.0	553.0
55°	1016.0	924.0	809.0	753.0	721.0	705.0	666.0	642.0	615.0	595.0	606.0
57.5°	1050.0	950.0	843.0	801.0	792.0	777.0	748.0	707.0	676.0	651.0	653.0
60°	1069.0	964.0	861.0	823.0	818.0	828.0	813.0	785.0	737.0	712.0	709.0
62.5°	1142.0	1032.0	912.0	858.0	847.0	854.0	858.0	841.0	801.0	768.0	759.0
65°	1157.0	1040.0	922.0	887.0	888.0	890.0	893.0	875.0	855.0	814.0	806.0
67.5°	1112.0	997.0	892.0	863.0	865.0	888.0	906.0	905.0	883.0	848.0	845.0
70°	1044.0	932.0	835.0	809.0	814.0	835.0	874.0	894.0	890.0	867.0	872.0
72.5°	938.0	838.0	753.0	733.0	745.0	765.0	802.0	838.0	859.0	864.0	875.0
75°	814.0	734.0	654.0	642.0	651.0	674.0	708.0	750.0	796.0	821.0	828.0
77.5°	672.0	599.0	540.0	532.0	545.0	566.0	600.0	633.0	685.0	729.0	739.0
80°	526.0	463.0	421.0	414.0	422.0	440.0	466.0	493.0	543.0	577.0	582.0
82.5°	365.0	327.0	300.0	296.0	301.0	308.0	329.0	354.0	382.0	409.0	412.0
85°	212.0	188.0	181.0	175.0	186.0	186.0	191.0	205.0	219.0	221.0	227.0
87.5°	39.0	37.0	38.0	28.0	35.0	25.0	25.0	32.0	24.0	28.0	23.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)