

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P821402

Luminaire Tested: **TT-D1-750-12VDC-5WQ-PM**

Issue Date: 2/18/2020

Test Information


Test Method: LM-79-08
Report Number: P821402
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1908-473-14)
Test Lab: INNOVATIONS CENTER
Issue Date: 2/18/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: TT-D1-750-12VDC-5WQ-PM
Description: TOPTIER LED SITE LUMINAIRE
5000K, 70 CRI LEDS AND WIDE DISTRIBUTION
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3874 lumens
Efficiency: N/A
Efficacy: 138.4 lumens/watt
Luminous Opening: Circular (Dia: 1.12' x H: 0')
IES Classification: Type V - Short
BUG Rating: B2 - U0 - G1

Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT


REPORT NUMBER: P821402
CATALOG NUMBER: TT-D1-750-12VDC-5WQ-PM

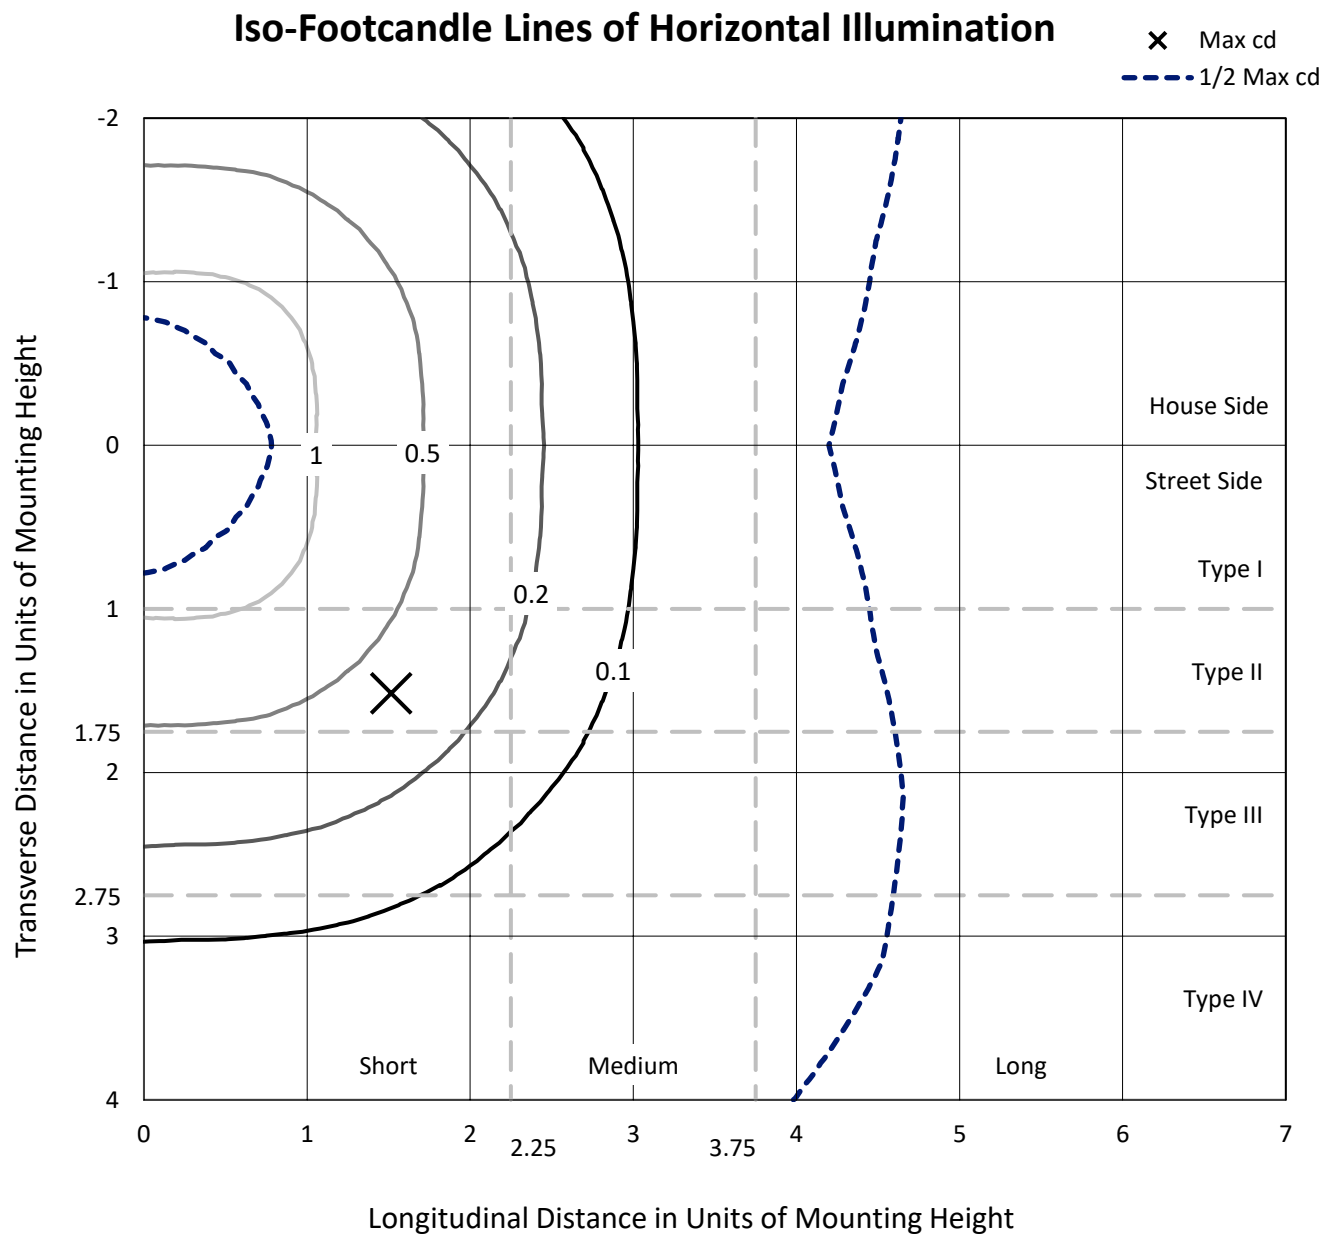

Based on 15 foot mounting height. Maximum calculated value = 1.3 fc
Type V - Short - N/A

REPORT NUMBER: P821402
CATALOG NUMBER: TT-D1-750-12VDC-5WQ-PM

Luminous Intensity Polar Plot

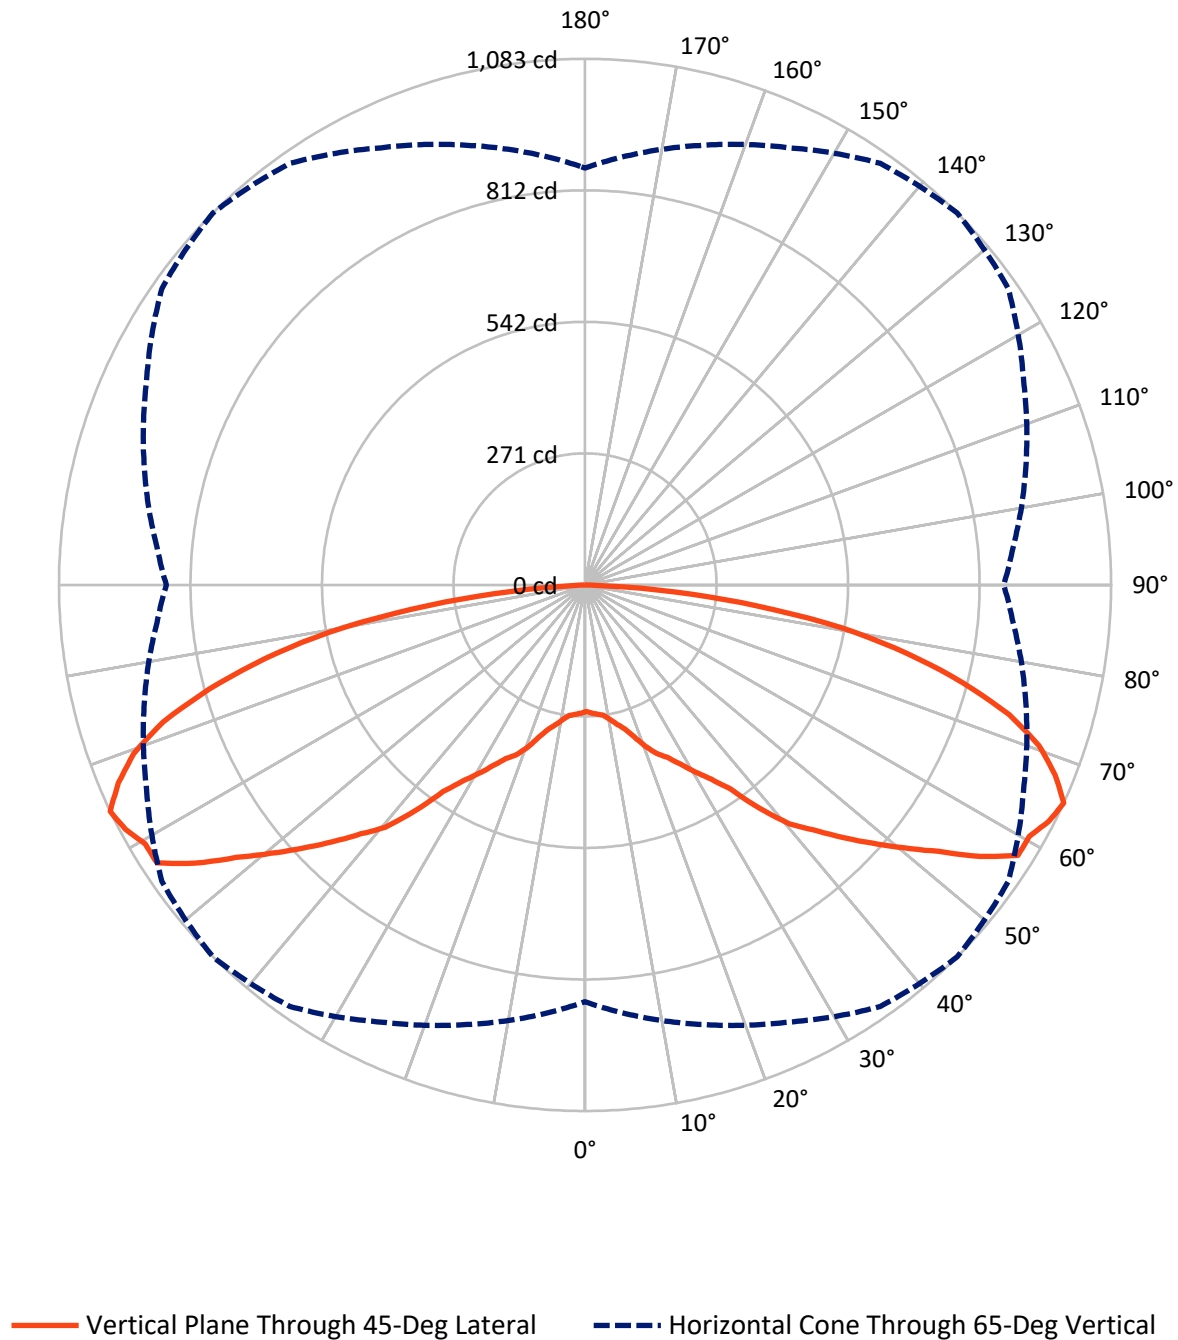

REPORT NUMBER: P821402

CATALOG NUMBER: TT-D1-750-12VDC-5WQ-PM


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1937.0	0.0	1937.0
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	1937.0	0.0	1937.0
	% Fixture	50.0	0.0	50.0
Total	Lumens	3874.0	0.0	3874.0
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	26.0	0.7
10°-20°	89.4	2.3
20°-30°	183.6	4.7
30°-40°	326.2	8.4
40°-50°	549.9	14.2
50°-60°	811.2	20.9
60°-70°	952.0	24.6
70°-80°	741.7	19.1
80°-90°	193.9	5.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	3874.0	100.0
0°-180°	3874.0	100.0

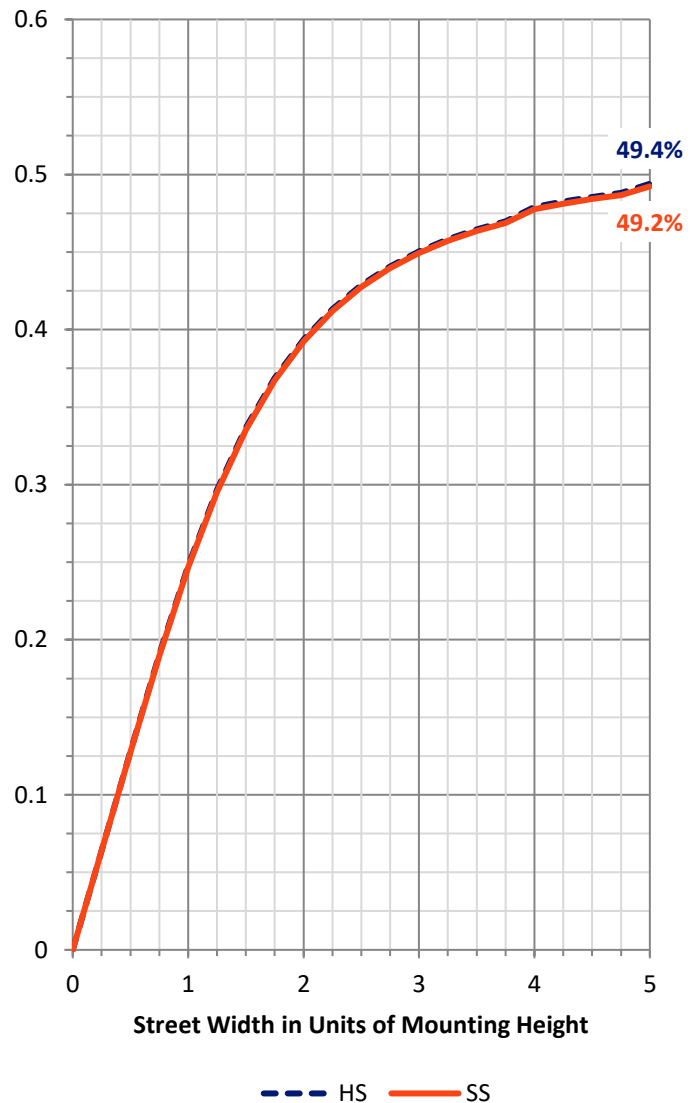

REPORT NUMBER: P821402


CATALOG NUMBER: TT-D1-750-12VDC-5WQ-PM

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	149.5	3.9			
FM	(30°-60°)	843.7	21.8			
FH	(60°-80°)	846.9	21.9			G1/1800
FVH	(80°-90°)	96.9	2.5			G1/100
BL	(0°-30°)	149.5	3.9	B1/500		
BM	(30°-60°)	843.7	21.8	B1/1000		
BH	(60°-80°)	846.9	21.9	B2/1000		G1/1800
BVH	(80°-90°)	96.9	2.5			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G1

Type V Short

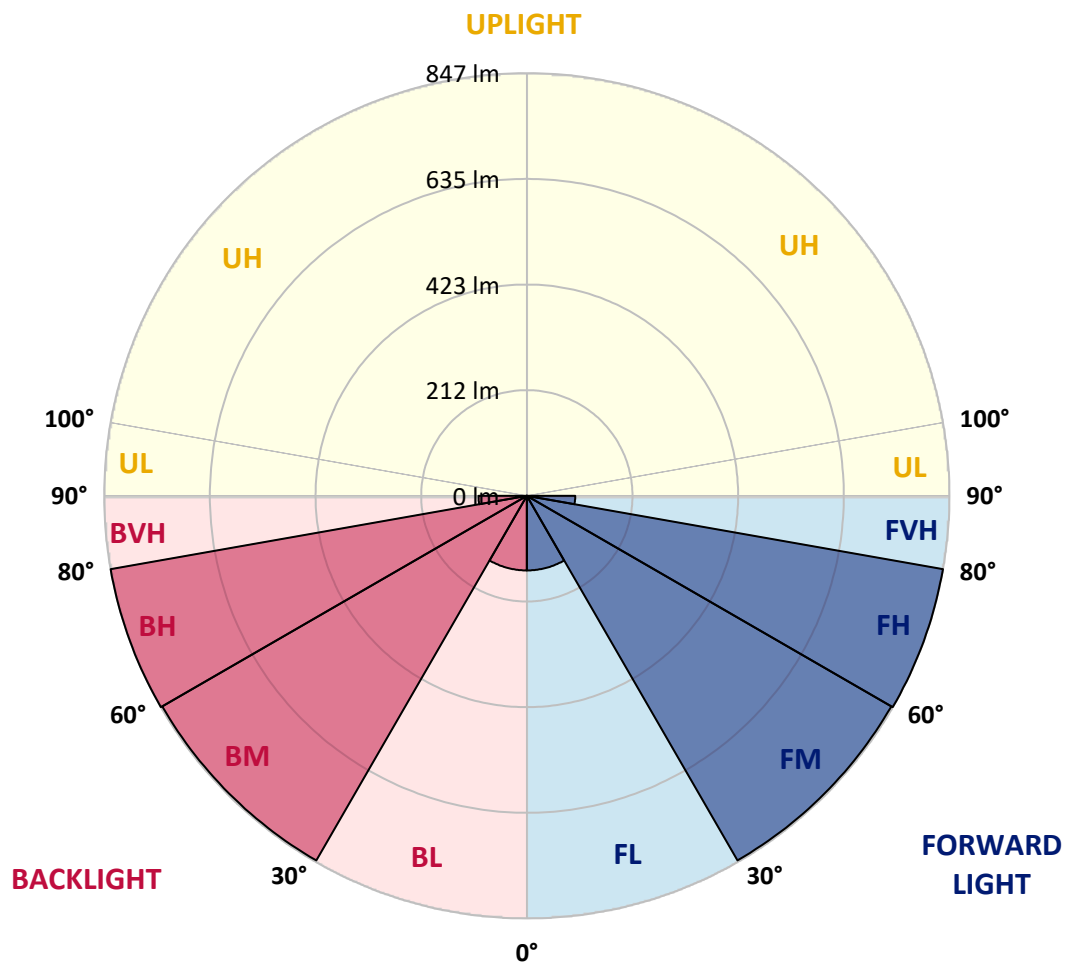

REPORT NUMBER: P821402

CATALOG NUMBER: TT-D1-750-12VDC-5WQ-PM

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	260.7	260.7	260.7	260.7	260.7	260.7	260.7	260.7	260.7	260.7	260.7
2.5°	265.0	265.0	265.0	264.4	264.4	264.4	264.4	265.0	265.0	265.0	265.0
5°	271.1	271.1	269.9	268.7	267.4	267.4	268.0	268.7	269.3	270.5	270.5
7.5°	274.7	274.7	274.1	272.9	271.1	271.1	271.7	272.9	273.5	273.5	272.9
10°	279.6	280.2	282.1	282.7	281.4	281.4	282.1	282.7	281.4	279.6	279.6
12.5°	291.2	291.8	294.2	296.1	296.1	294.8	295.5	296.7	293.6	290.6	291.2
15°	307.6	307.6	308.2	310.1	308.9	307.6	308.9	309.5	307.6	307.0	308.2
17.5°	329.6	329.6	325.9	329.0	329.6	329.0	330.2	327.1	325.3	327.7	329.0
20°	353.3	350.9	349.1	351.5	356.4	354.5	357.0	350.3	348.5	349.7	350.3
22.5°	368.6	370.4	371.6	372.8	379.5	377.1	379.5	372.2	371.0	368.6	366.7
25°	386.8	388.7	396.0	392.3	396.6	392.9	396.0	391.7	394.1	386.8	386.8
27.5°	407.5	411.2	415.5	413.6	419.1	417.3	419.1	413.0	413.6	410.6	409.4
30°	435.6	435.6	434.4	438.0	447.8	446.5	447.1	439.2	433.7	434.4	436.8
32.5°	463.6	459.9	461.8	472.7	478.8	476.4	477.6	473.9	461.8	459.3	461.2
35°	489.8	495.3	499.5	508.7	517.2	516.0	515.4	509.3	501.4	491.6	488.6
37.5°	530.6	536.7	548.3	564.7	579.9	583.0	575.1	567.2	548.9	534.9	527.6
40°	584.2	584.8	598.2	629.9	643.9	646.3	642.1	628.7	600.7	584.8	584.2
42.5°	631.1	626.9	648.8	675.6	688.4	689.6	686.6	675.6	648.8	626.2	630.5
45°	667.7	667.7	693.9	715.2	735.9	740.8	735.3	712.1	694.5	668.3	666.5
47.5°	701.2	710.3	732.2	758.4	787.7	794.4	787.7	760.3	730.4	710.9	700.6
50°	741.4	752.3	768.2	809.0	841.9	851.0	841.3	811.4	768.2	751.7	745.6
52.5°	788.3	797.4	822.4	873.6	897.9	911.3	903.4	874.8	823.6	798.6	793.8
55°	844.3	835.8	874.8	924.1	969.2	986.9	971.0	925.4	880.9	835.8	844.3
57.5°	873.0	863.2	918.0	965.0	1027.7	1050.8	1031.4	968.6	918.0	866.3	872.4
60°	875.4	879.7	921.1	997.8	1041.1	1050.8	1044.8	1003.3	922.9	883.3	871.7
62.5°	868.1	894.3	929.6	1008.8	1047.8	1071.6	1050.8	1010.0	933.3	898.6	868.7
65°	858.3	884.5	936.9	993.0	1059.4	1083.1	1063.6	996.0	939.4	884.5	862.0
67.5°	841.3	832.2	896.7	971.7	1029.5	1043.5	1031.4	972.9	896.1	830.9	843.1
70°	787.1	779.2	834.6	916.8	972.3	991.8	977.1	918.0	835.8	781.0	788.3
72.5°	706.7	709.1	762.7	841.3	901.0	913.2	905.3	840.7	765.7	712.1	702.4
75°	612.8	618.9	670.1	741.4	795.6	802.9	795.0	744.4	669.5	622.6	609.8
77.5°	503.8	512.9	554.4	625.6	661.6	678.0	665.2	627.5	557.4	515.4	502.6
80°	390.5	393.5	422.8	480.0	527.6	538.5	526.3	481.9	426.4	394.8	385.6
82.5°	255.9	260.7	286.9	330.8	361.9	358.8	361.9	327.1	290.0	259.5	244.3
85°	113.9	123.7	141.3	162.0	182.1	187.6	182.1	164.5	141.3	121.2	118.8
87.5°	7.9	9.1	11.0	11.6	12.8	9.7	9.7	9.7	8.5	9.7	7.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Streetworks

Report Number: SP1-2407-176-6

Test Date: 09/26/2024

Luminaire Tested: MEM2-HTN-VA-30-750-U-WQ


Data in this report applies to families of products including MEM2-HTN-VA-30-750-U-WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-176-6
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 09/27/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Streetworks
 Catalog Number: **MEM2-HTN-VA-30-750-U-WQ**
 Description: EPIC MODERN VISUAL COMFORT 30W WAVESTREAM WIDE

Spectral Parameters

CCT (K):	4786	CRI (Ra):	70.9		
CIE u':	0.2093	R1:	67.8	R9:	-29.8
CIE v':	0.4953	R2:	75.1	R10:	40.9
Duv:	0.0066	R3:	80.6	R11:	67.4
CIE x:	0.3533	R4:	71.6	R12:	35.3
CIE y:	0.3716	R5:	67.8	R13:	68.5
CIE z:	0.2751	R6:	65.4	R14:	89.0
Peak Wavelength (nm):	449	R7:	82.0	R15:	60.9
Dominant Wavelength (nm):	570	R8:	57.0		
Purity:	17.53512				
Rf:	73				
Rg:	94.6				

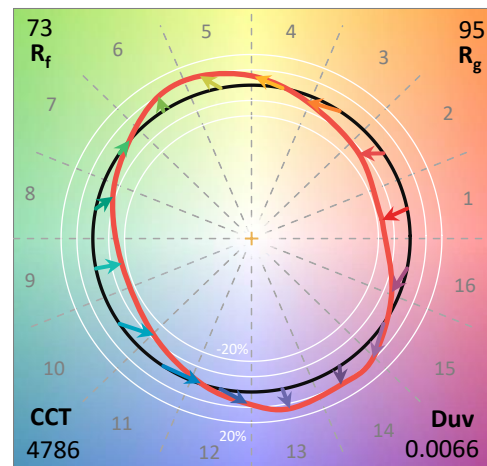

Test Conditions


Stabilization Time: 45M
 Operation Time: 1H 45M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-176-6


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-176-6

CIE 1931 Chromaticity Diagram

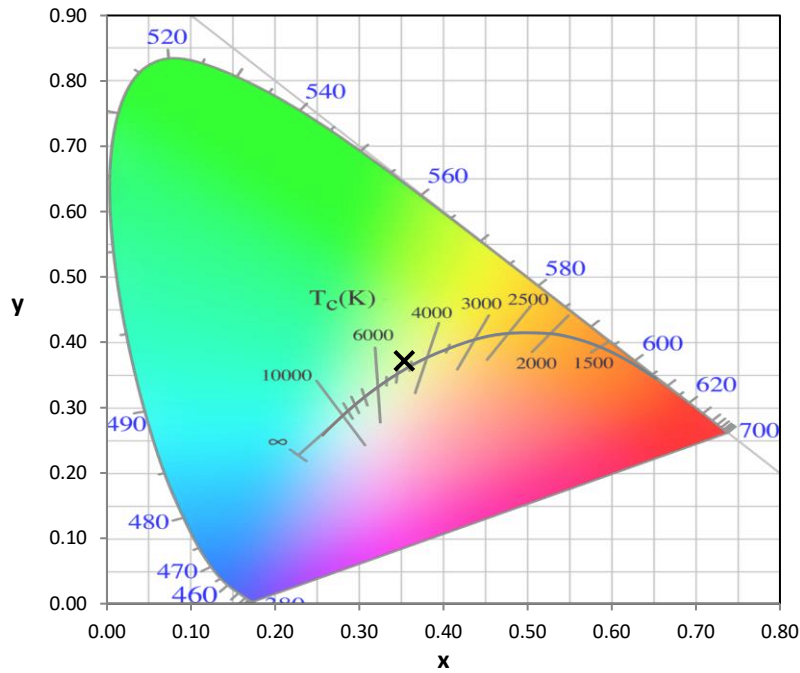


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

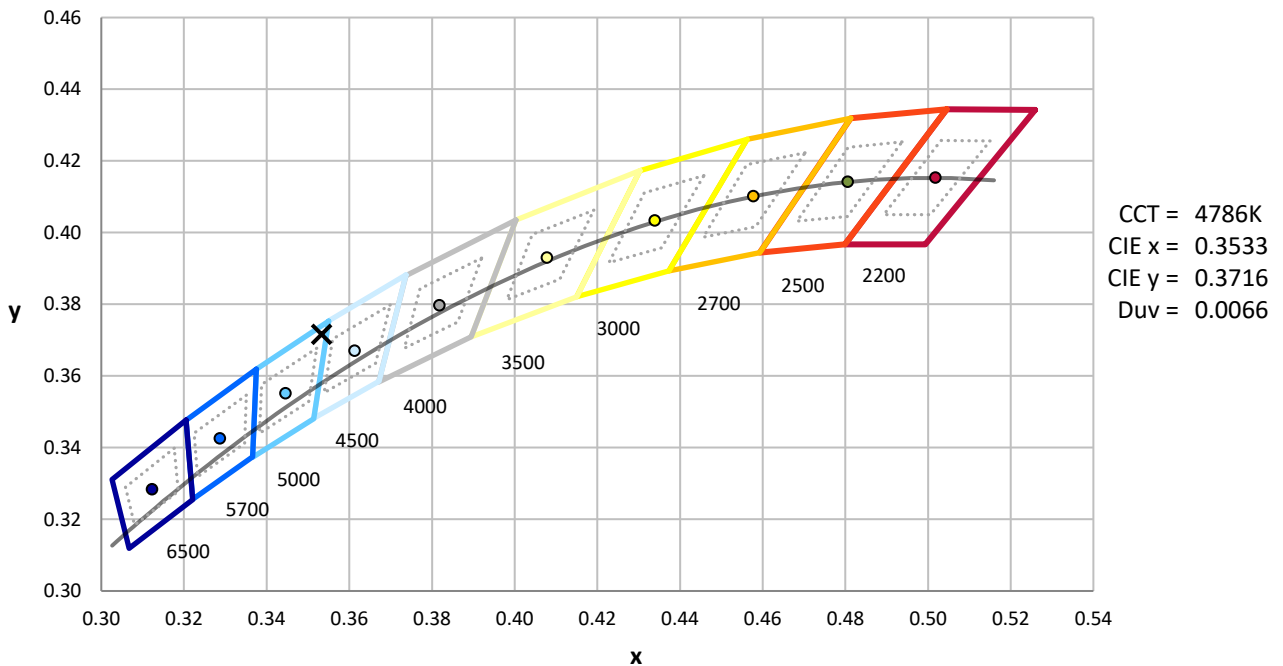

Point lies inside the ANSI 5000K 7-step quadrangle

REPORT NUMBER: SP1-2407-176-6

Photopic Flux vs. Wavelength

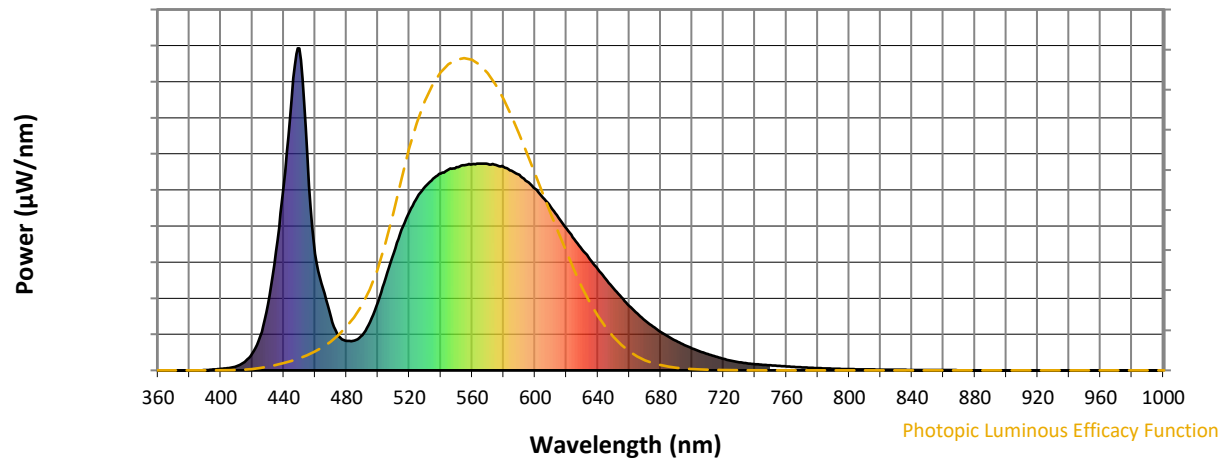


Photopic Lumens: NR

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	110	NR	620	440	NR	750	16	NR	880	0	NR
365	0	NR	495	150	NR	625	407	NR	755	14	NR	885	0	NR
370	0	NR	500	213	NR	630	375	NR	760	12	NR	890	0	NR
375	0	NR	505	288	NR	635	345	NR	765	11	NR	895	0	NR
380	0	NR	510	364	NR	640	314	NR	770	9	NR	900	0	NR
385	0	NR	515	436	NR	645	283	NR	775	8	NR	905	0	NR
390	1	NR	520	492	NR	650	254	NR	780	7	NR	910	0	NR
395	3	NR	525	537	NR	655	227	NR	785	6	NR	915	0	NR
400	5	NR	530	570	NR	660	200	NR	790	5	NR	920	0	NR
405	7	NR	535	595	NR	665	177	NR	795	4	NR	925	0	NR
410	13	NR	540	611	NR	670	155	NR	800	4	NR	930	0	NR
415	25	NR	545	624	NR	675	136	NR	805	3	NR	935	0	NR
420	52	NR	550	631	NR	680	119	NR	810	3	NR	940	0	NR
425	106	NR	555	637	NR	685	104	NR	815	3	NR	945	0	NR
430	204	NR	560	640	NR	690	91	NR	820	2	NR	950	0	NR
435	369	NR	565	642	NR	695	79	NR	825	2	NR	955	0	NR
440	573	NR	570	641	NR	700	68	NR	830	2	NR	960	0	NR
445	844	NR	575	638	NR	705	59	NR	835	2	NR	965	0	NR
450	999	NR	580	632	NR	710	50	NR	840	1	NR	970	0	NR
455	668	NR	585	620	NR	715	43	NR	845	1	NR	975	0	NR
460	361	NR	590	607	NR	720	36	NR	850	1	NR	980	0	NR
465	255	NR	595	586	NR	725	30	NR	855	1	NR	985	0	NR
470	165	NR	600	564	NR	730	25	NR	860	1	NR	990	0	NR
475	106	NR	605	537	NR	735	22	NR	865	1	NR	995	0	NR
480	91	NR	610	507	NR	740	19	NR	870	0	NR	1000	0	NR
485	93	NR	615	474	NR	745	17	NR	875	0	NR			

REPORT NUMBER: SP1-2407-176-6

Scotopic Flux vs. Wavelength

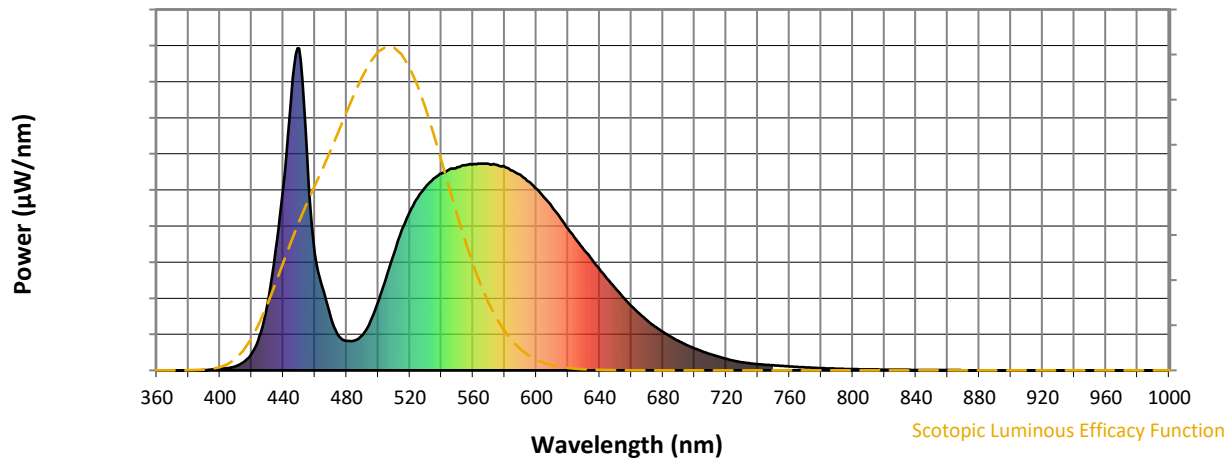


Scotopic Lumens: NR

S/P: 1.69

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	110	NR	620	440	NR	750	16	NR	880	0	NR
365	0	NR	495	150	NR	625	407	NR	755	14	NR	885	0	NR
370	0	NR	500	213	NR	630	375	NR	760	12	NR	890	0	NR
375	0	NR	505	288	NR	635	345	NR	765	11	NR	895	0	NR
380	0	NR	510	364	NR	640	314	NR	770	9	NR	900	0	NR
385	0	NR	515	436	NR	645	283	NR	775	8	NR	905	0	NR
390	1	NR	520	492	NR	650	254	NR	780	7	NR	910	0	NR
395	3	NR	525	537	NR	655	227	NR	785	6	NR	915	0	NR
400	5	NR	530	570	NR	660	200	NR	790	5	NR	920	0	NR
405	7	NR	535	595	NR	665	177	NR	795	4	NR	925	0	NR
410	13	NR	540	611	NR	670	155	NR	800	4	NR	930	0	NR
415	25	NR	545	624	NR	675	136	NR	805	3	NR	935	0	NR
420	52	NR	550	631	NR	680	119	NR	810	3	NR	940	0	NR
425	106	NR	555	637	NR	685	104	NR	815	3	NR	945	0	NR
430	204	NR	560	640	NR	690	91	NR	820	2	NR	950	0	NR
435	369	NR	565	642	NR	695	79	NR	825	2	NR	955	0	NR
440	573	NR	570	641	NR	700	68	NR	830	2	NR	960	0	NR
445	844	NR	575	638	NR	705	59	NR	835	2	NR	965	0	NR
450	999	NR	580	632	NR	710	50	NR	840	1	NR	970	0	NR
455	668	NR	585	620	NR	715	43	NR	845	1	NR	975	0	NR
460	361	NR	590	607	NR	720	36	NR	850	1	NR	980	0	NR
465	255	NR	595	586	NR	725	30	NR	855	1	NR	985	0	NR
470	165	NR	600	564	NR	730	25	NR	860	1	NR	990	0	NR
475	106	NR	605	537	NR	735	22	NR	865	1	NR	995	0	NR
480	91	NR	610	507	NR	740	19	NR	870	0	NR	1000	0	NR
485	93	NR	615	474	NR	745	17	NR	875	0	NR			

REPORT NUMBER: SP1-2407-176-6

Melanopic Flux vs. Wavelength

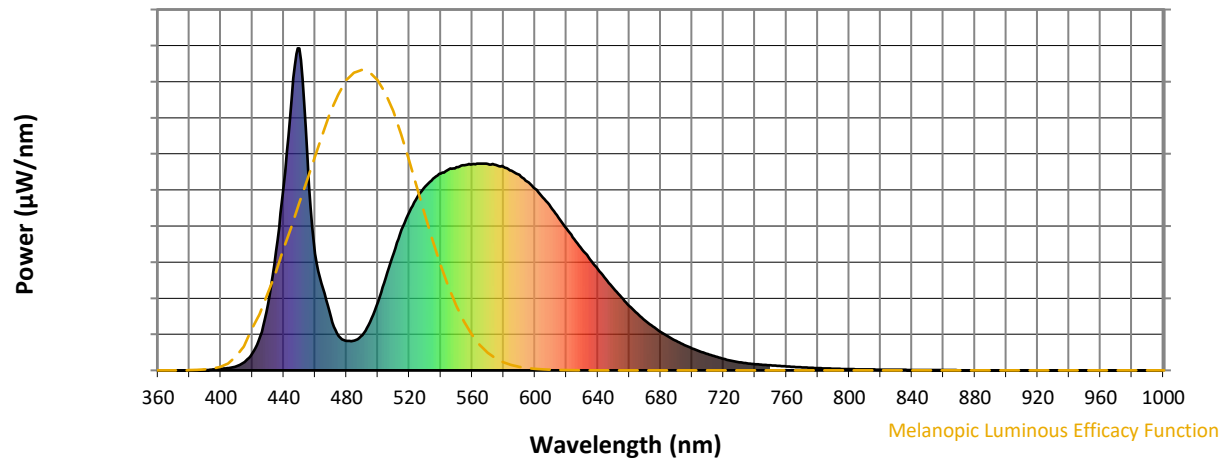

Melanopic Lumens: NR

M/P: 3.36


λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	110	NR	620	440	NR	750	16	NR	880	0	NR
365	0	NR	495	150	NR	625	407	NR	755	14	NR	885	0	NR
370	0	NR	500	213	NR	630	375	NR	760	12	NR	890	0	NR
375	0	NR	505	288	NR	635	345	NR	765	11	NR	895	0	NR
380	0	NR	510	364	NR	640	314	NR	770	9	NR	900	0	NR
385	0	NR	515	436	NR	645	283	NR	775	8	NR	905	0	NR
390	1	NR	520	492	NR	650	254	NR	780	7	NR	910	0	NR
395	3	NR	525	537	NR	655	227	NR	785	6	NR	915	0	NR
400	5	NR	530	570	NR	660	200	NR	790	5	NR	920	0	NR
405	7	NR	535	595	NR	665	177	NR	795	4	NR	925	0	NR
410	13	NR	540	611	NR	670	155	NR	800	4	NR	930	0	NR
415	25	NR	545	624	NR	675	136	NR	805	3	NR	935	0	NR
420	52	NR	550	631	NR	680	119	NR	810	3	NR	940	0	NR
425	106	NR	555	637	NR	685	104	NR	815	3	NR	945	0	NR
430	204	NR	560	640	NR	690	91	NR	820	2	NR	950	0	NR
435	369	NR	565	642	NR	695	79	NR	825	2	NR	955	0	NR
440	573	NR	570	641	NR	700	68	NR	830	2	NR	960	0	NR
445	844	NR	575	638	NR	705	59	NR	835	2	NR	965	0	NR
450	999	NR	580	632	NR	710	50	NR	840	1	NR	970	0	NR
455	668	NR	585	620	NR	715	43	NR	845	1	NR	975	0	NR
460	361	NR	590	607	NR	720	36	NR	850	1	NR	980	0	NR
465	255	NR	595	586	NR	725	30	NR	855	1	NR	985	0	NR
470	165	NR	600	564	NR	730	25	NR	860	1	NR	990	0	NR
475	106	NR	605	537	NR	735	22	NR	865	1	NR	995	0	NR
480	91	NR	610	507	NR	740	19	NR	870	0	NR	1000	0	NR
485	93	NR	615	474	NR	745	17	NR	875	0	NR			

REPORT NUMBER: SP1-2407-176-6





TM-30-18

Summary

$R_f = 73$
 $R_g = 94.6$
 $CIE R_a = 70.9$
 $R_g = -29.8$

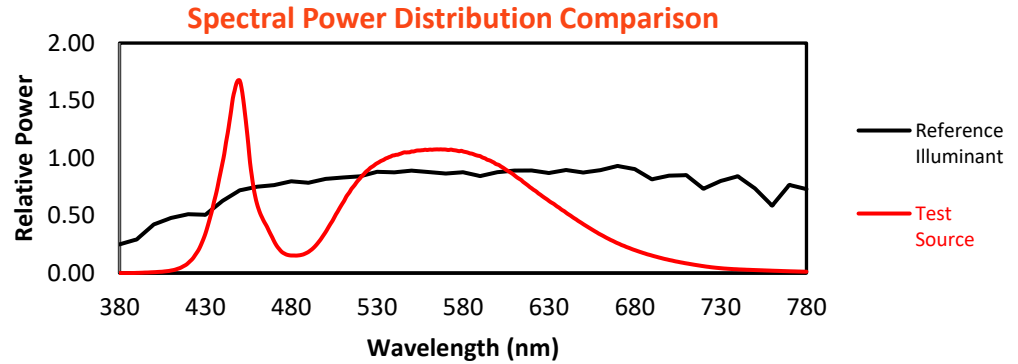


Color Vector Graphics

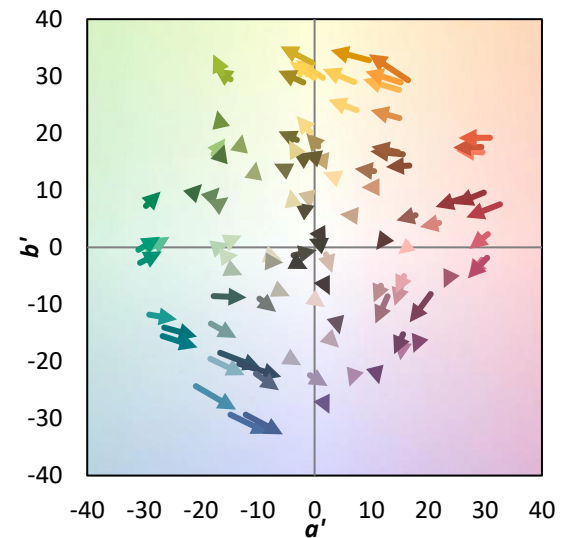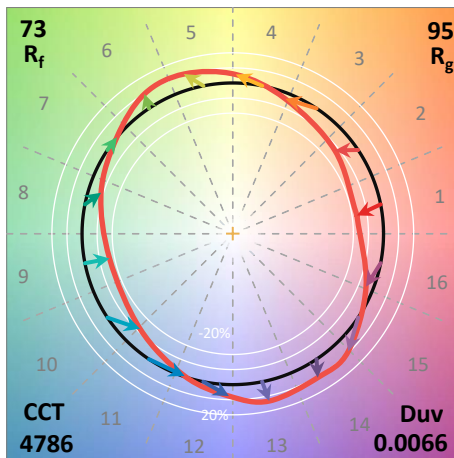
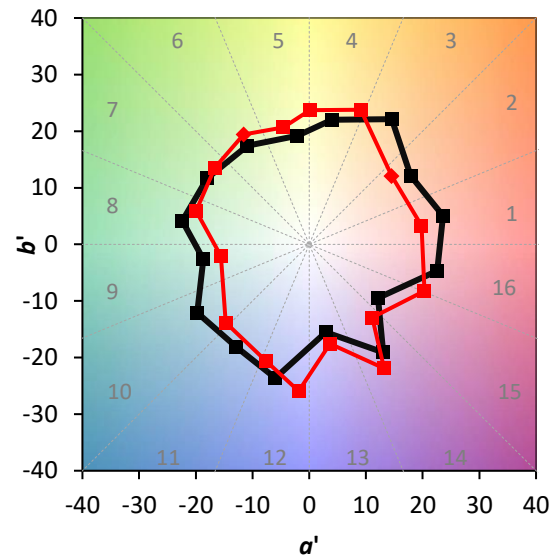
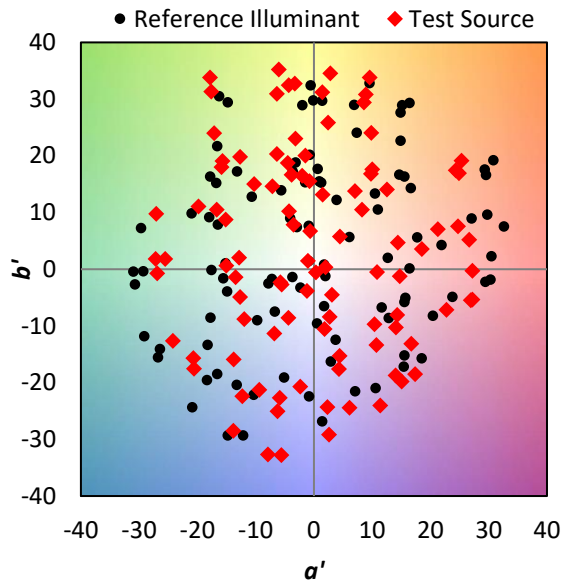


Individual Sample Fidelity Index ($R_{f,i}$)


CES01 = 85	CES26 = 60	CES51 = 89	CES76 = 46
CES02 = 59	CES27 = 86	CES52 = 88	CES77 = 65
CES03 = 30	CES28 = 78	CES53 = 76	CES78 = 49
CES04 = 69	CES29 = 62	CES54 = 83	CES79 = 78
CES05 = 46	CES30 = 79	CES55 = 82	CES80 = 74
CES06 = 50	CES31 = 66	CES56 = 71	CES81 = 77
CES07 = 39	CES32 = 58	CES57 = 70	CES82 = 89
CES08 = 38	CES33 = 74	CES58 = 71	CES83 = 87
CES09 = 29	CES34 = 66	CES59 = 86	CES84 = 86
CES10 = 72	CES35 = 81	CES60 = 90	CES85 = 79
CES11 = 56	CES36 = 94	CES61 = 84	CES86 = 76
CES12 = 61	CES37 = 75	CES62 = 84	CES87 = 76
CES13 = 41	CES38 = 88	CES63 = 72	CES88 = 79
CES14 = 74	CES39 = 95	CES64 = 66	CES89 = 73
CES15 = 70	CES40 = 88	CES65 = 61	CES90 = 78
CES16 = 46	CES41 = 92	CES66 = 58	CES91 = 77
CES17 = 49	CES42 = 75	CES67 = 55	CES92 = 63
CES18 = 55	CES43 = 74	CES68 = 65	CES93 = 77
CES19 = 71	CES44 = 99	CES69 = 74	CES94 = 56
CES20 = 64	CES45 = 83	CES70 = 55	CES95 = 67
CES21 = 85	CES46 = 82	CES71 = 47	CES96 = 76
CES22 = 77	CES47 = 84	CES72 = 82	CES97 = 83
CES23 = 91	CES48 = 76	CES73 = 44	CES98 = 73
CES24 = 90	CES49 = 80	CES74 = 92	CES99 = 62
CES25 = 71	CES50 = 88	CES75 = 47	

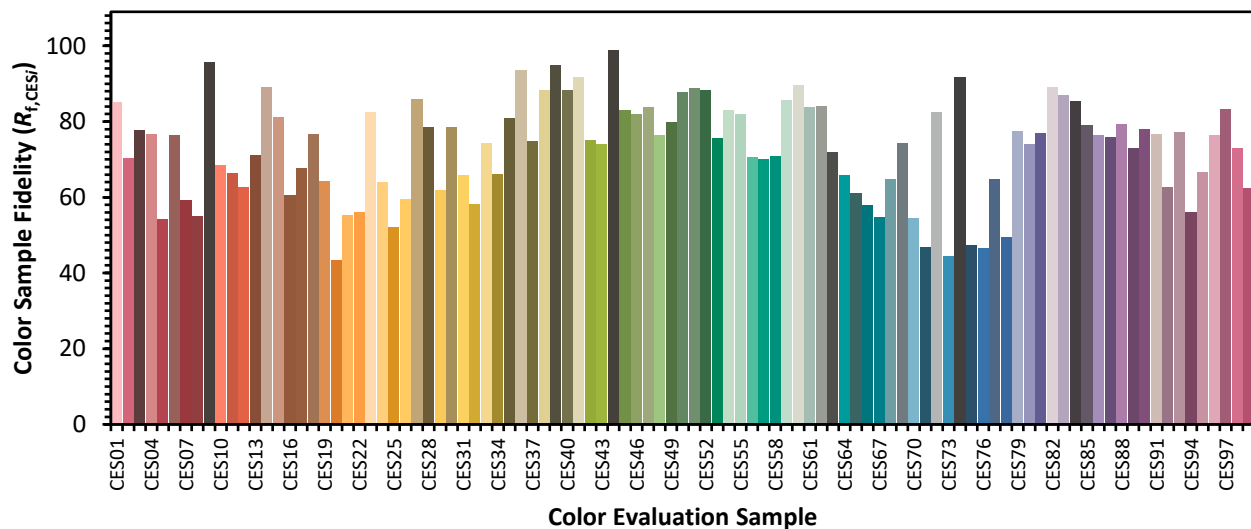

Color Rendition by Hue-Angle Bin

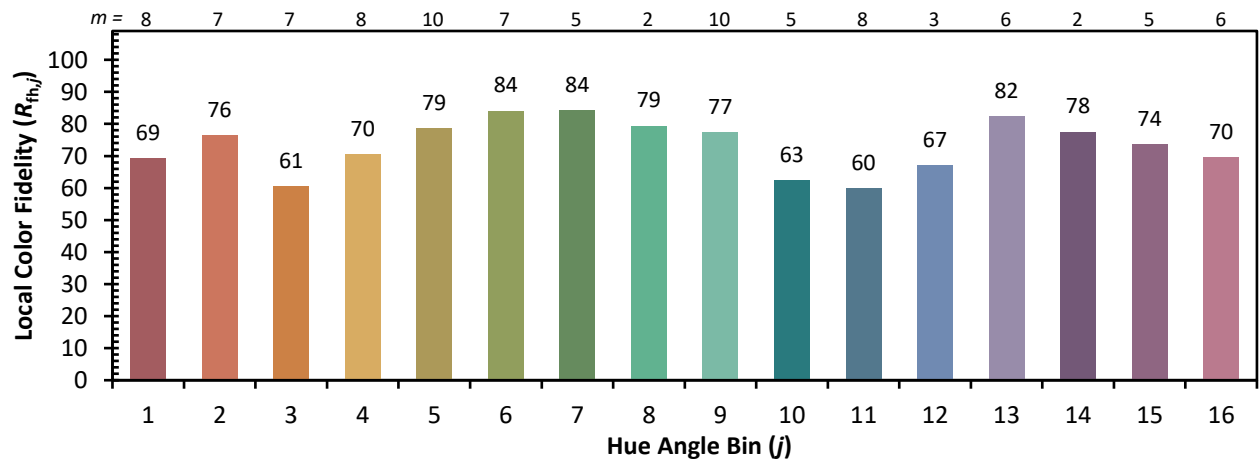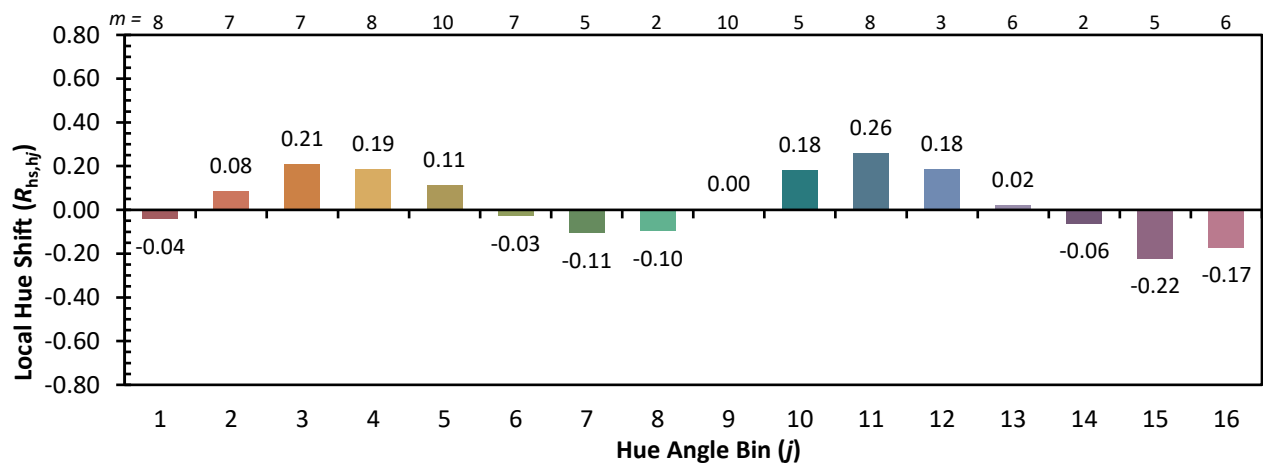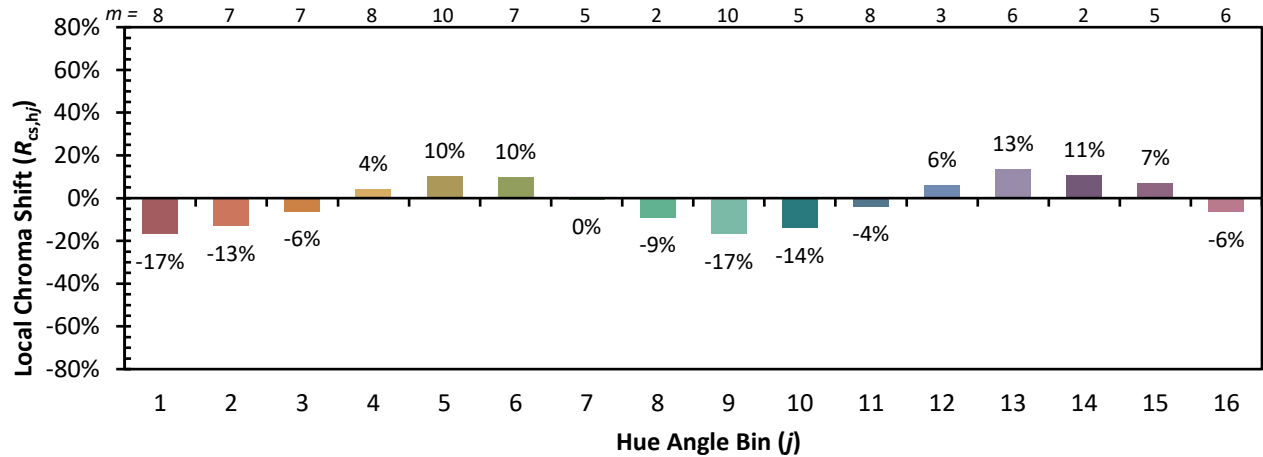

Measure Comparisons

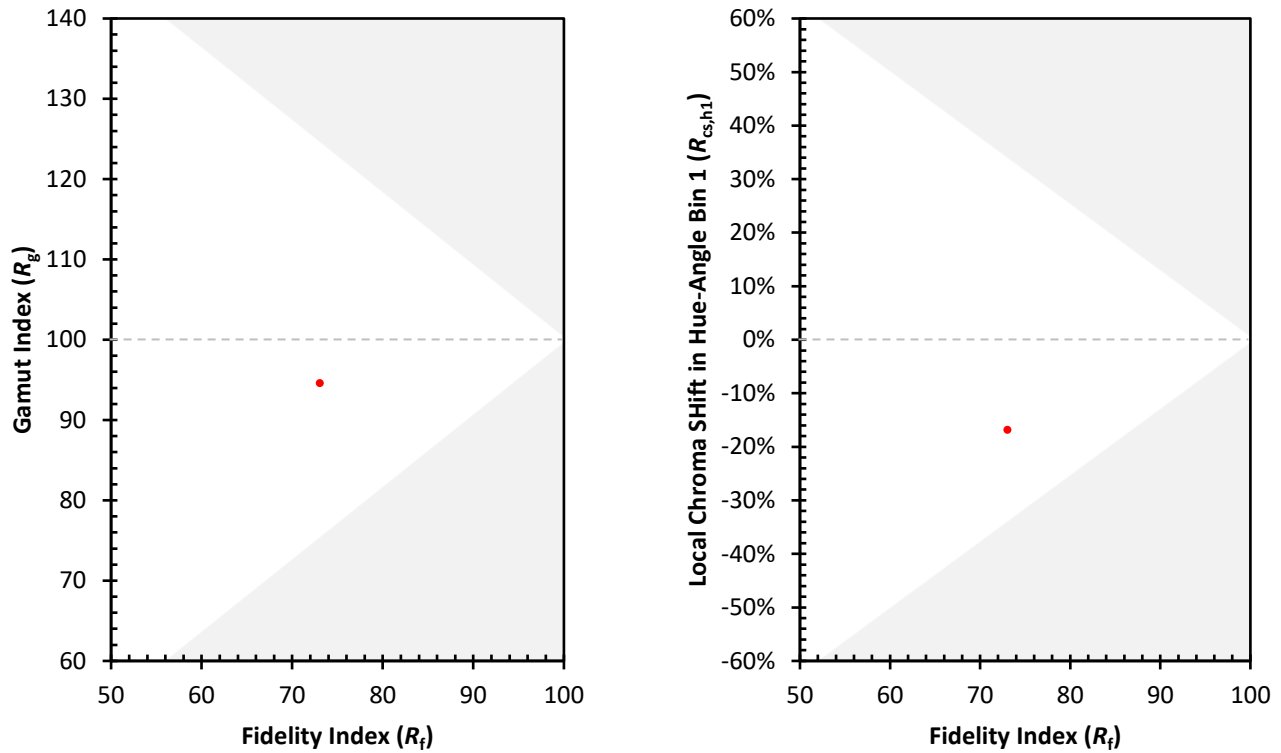

(END OF REPORT)