

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1010346

Luminaire Tested: S122RDIP-B865D725UB35-4F0-XX-W2A-A

Issue Date: 5/7/2025

**Test Information**

Test Method: LM-79-2019  
Report Number: P1010346  
REPORT IS A COMBINATION OF REPORTS P988761 AND P1007351  
Test Lab: INNOVATION CENTER  
Issue Date: 5/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122RDIP-B865D725UB35-4F0-XX-W2A-A  
Description: Define 2 Regressed Direct/Indirect Pendant with 3500K BioUP LEDs {m-DER=0.721}  
{m-EER=0.792}  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6138.0 lumens  
Efficiency: N/A  
Efficacy: 90.4 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 0.85 / 1.01  
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 67.9  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

### Luminous Intensity Polar Plot

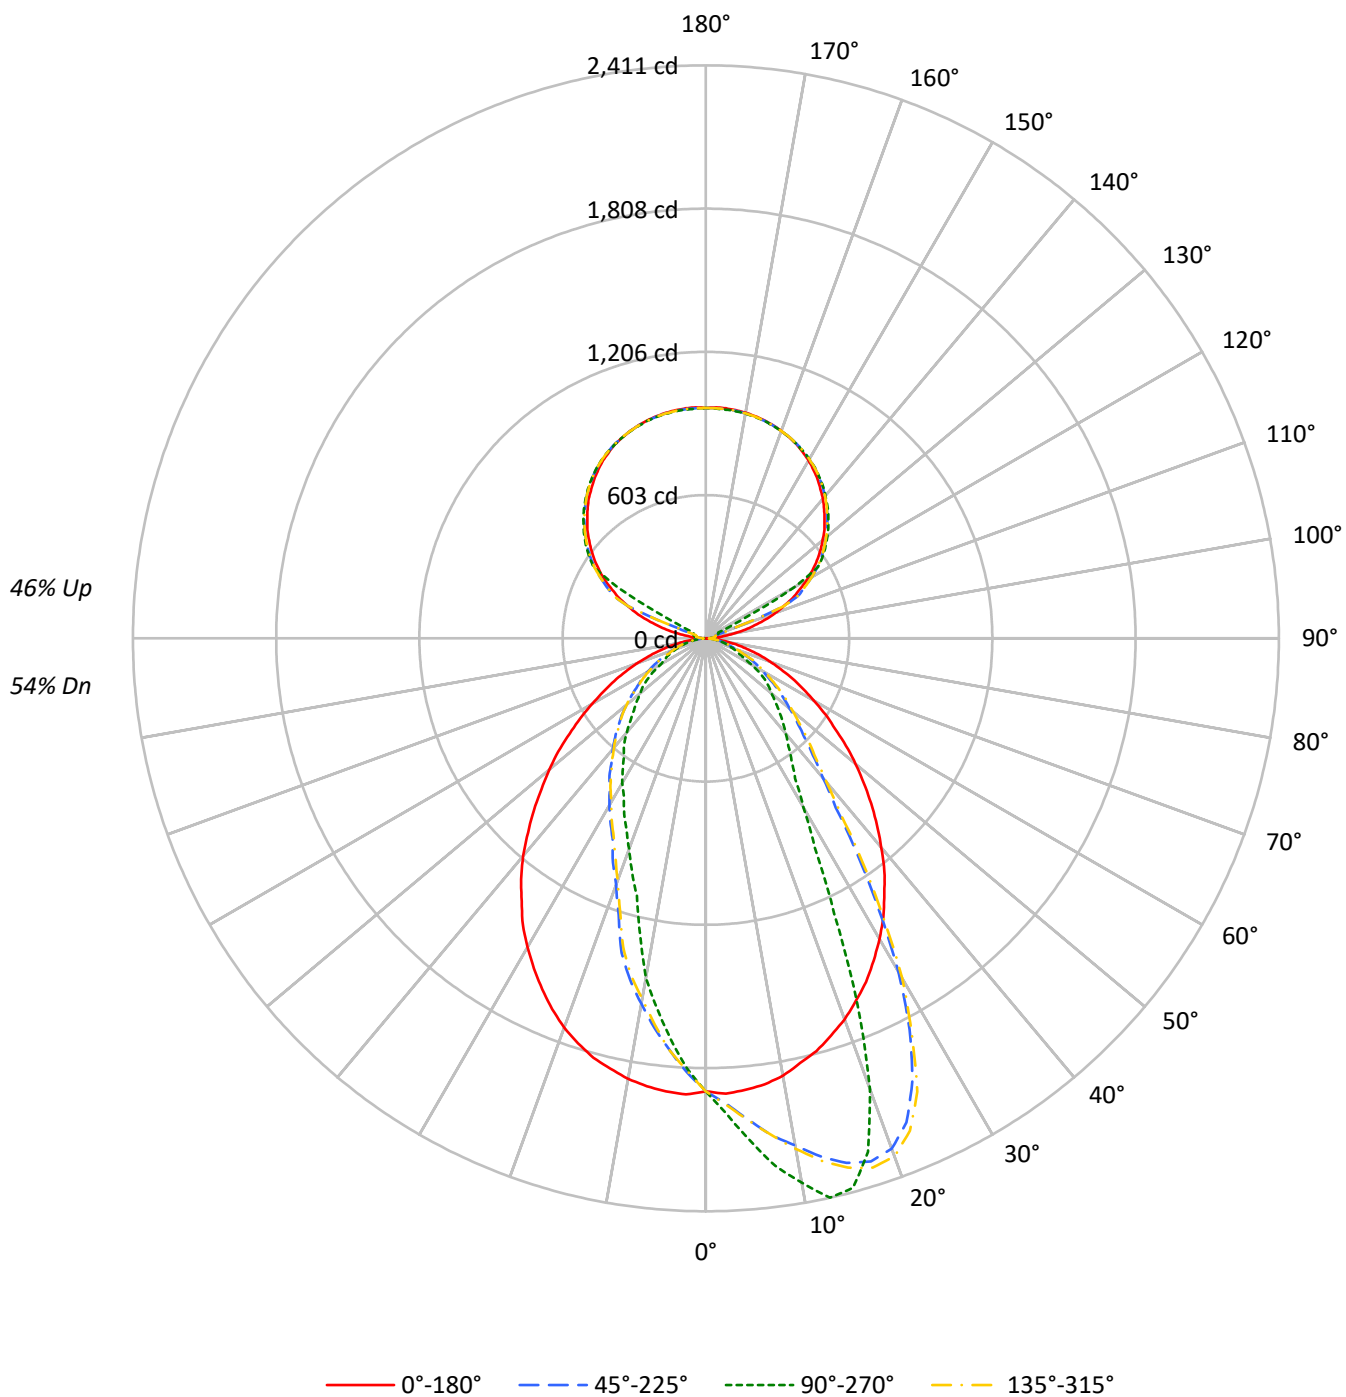

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |    | 20 |    |    |    |    | 20 |    |    |    |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |    | 50 |    |    |    |    | 30 |    |    |    |    | 0  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |
| 0   | 108 | 108 | 108 | 108 | 100 | 100 | 100 | 100 | 85 | 85 | 85 | 72 | 72 | 72 | 60 | 60 | 60 | 54 | 54 | 54 |
| 1   | 99  | 95  | 92  | 89  | 92  | 89  | 86  | 83  | 76 | 74 | 72 | 65 | 63 | 62 | 54 | 53 | 52 | 47 | 47 | 47 |
| 2   | 91  | 84  | 79  | 74  | 85  | 79  | 74  | 69  | 68 | 64 | 61 | 58 | 55 | 53 | 49 | 47 | 45 | 41 | 41 | 41 |
| 3   | 84  | 75  | 68  | 63  | 78  | 70  | 64  | 59  | 61 | 56 | 52 | 52 | 49 | 46 | 44 | 41 | 39 | 36 | 36 | 36 |
| 4   | 77  | 67  | 60  | 54  | 72  | 63  | 56  | 51  | 55 | 49 | 45 | 47 | 43 | 40 | 40 | 37 | 35 | 31 | 31 | 31 |
| 5   | 71  | 60  | 53  | 47  | 66  | 56  | 50  | 45  | 49 | 44 | 40 | 43 | 39 | 35 | 36 | 33 | 31 | 28 | 28 | 28 |
| 6   | 66  | 55  | 47  | 41  | 61  | 51  | 44  | 39  | 45 | 39 | 35 | 39 | 35 | 32 | 33 | 30 | 28 | 25 | 25 | 25 |
| 7   | 61  | 50  | 42  | 37  | 57  | 47  | 40  | 35  | 41 | 36 | 32 | 36 | 32 | 28 | 31 | 28 | 25 | 23 | 23 | 23 |
| 8   | 57  | 45  | 38  | 33  | 53  | 43  | 36  | 31  | 38 | 32 | 29 | 33 | 29 | 26 | 29 | 25 | 23 | 21 | 21 | 21 |
| 9   | 53  | 42  | 34  | 30  | 50  | 39  | 33  | 28  | 35 | 30 | 26 | 31 | 26 | 23 | 27 | 23 | 21 | 19 | 19 | 19 |
| 10  | 50  | 38  | 32  | 27  | 47  | 36  | 30  | 26  | 32 | 27 | 24 | 28 | 24 | 21 | 25 | 22 | 19 | 17 | 17 | 17 |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°    | 90°   | 180°  | 270°  |
|-----|-------|-------|-------|-------|
| 0°  | 30172 | 30172 | 30172 | 30172 |
| 5°  | 30242 | 32048 | 30348 | 25603 |
| 10° | 29909 | 33873 | 30122 | 21143 |
| 15° | 29261 | 33885 | 29757 | 15882 |
| 20° | 28480 | 28009 | 29100 | 13103 |
| 25° | 27533 | 17501 | 28129 | 11147 |
| 30° | 26324 | 11206 | 27041 | 9597  |
| 35° | 24854 | 8612  | 25659 | 8212  |
| 40° | 23216 | 7238  | 24208 | 7183  |
| 45° | 21467 | 6161  | 22362 | 6030  |
| 50° | 19671 | 5235  | 20590 | 5216  |
| 55° | 17682 | 4549  | 18636 | 4490  |
| 60° | 15916 | 3469  | 16762 | 3428  |
| 65° | 14270 | 2610  | 15116 | 2961  |
| 70° | 12446 | 2086  | 13425 | 2413  |
| 75° | 10522 | 1598  | 11485 | 1826  |
| 80° | 8351  | 1087  | 8990  | 1198  |
| 85° | 5806  | 560   | 6357  | 593   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 165°

Vertical Angle: 45°

Luminance: 27600 cd/sqm

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 180.8  | 2.9       |
| 10°-20°   | 504.7  | 8.2       |
| 20°-30°   | 649.5  | 10.6      |
| 30°-40°   | 616.2  | 10.0      |
| 40°-50°   | 528.1  | 8.6       |
| 50°-60°   | 402.2  | 6.6       |
| 60°-70°   | 253.6  | 4.1       |
| 70°-80°   | 126.5  | 2.1       |
| 80°-90°   | 34.2   | 0.6       |
| 90°-100°  | 32.0   | 0.5       |
| 100°-110° | 119.2  | 1.9       |
| 110°-120° | 316.1  | 5.1       |
| 120°-130° | 524.2  | 8.5       |
| 130°-140° | 556.8  | 9.1       |
| 140°-150° | 517.5  | 8.4       |
| 150°-160° | 416.1  | 6.8       |
| 160°-170° | 268.1  | 4.4       |
| 170°-180° | 92.3   | 1.5       |
| 0°-30°    | 1334.9 | 21.7      |
| 0°-40°    | 1951.1 | 31.8      |
| 0°-60°    | 2881.3 | 46.9      |
| 0°-90°    | 3295.7 | 53.7      |
| 90°-120°  | 467.2  | 7.6       |
| 90°-150°  | 2065.8 | 33.7      |
| 90°-180°  | 2842.0 | 46.3      |
| 0°-180°   | 6138.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°   | 90°  | 180° | 270° | 360° | Flux |
|------|------|------|------|------|------|------|
| 0°   | 1906 | 1906 | 1906 | 1906 | 1906 |      |
| 5°   | 1907 | 2121 | 1914 | 1694 | 1907 | 181  |
| 15°  | 1798 | 2394 | 1828 | 1122 | 1798 | 506  |
| 25°  | 1595 | 1277 | 1629 | 813  | 1595 | 732  |
| 35°  | 1309 | 629  | 1351 | 600  | 1309 | 819  |
| 45°  | 983  | 437  | 1024 | 428  | 983  | 759  |
| 55°  | 664  | 303  | 699  | 299  | 664  | 598  |
| 65°  | 401  | 158  | 425  | 179  | 401  | 398  |
| 75°  | 188  | 84   | 205  | 95   | 188  | 204  |
| 85°  | 41   | 24   | 45   | 25   | 41   | 47   |
| 90°  | 1    | 19   | 1    | 19   | 1    | 5    |
| 95°  | 46   | 30   | 46   | 30   | 46   | 54   |
| 105° | 213  | 53   | 213  | 53   | 213  | 228  |
| 115° | 403  | 58   | 403  | 58   | 403  | 397  |
| 125° | 570  | 600  | 570  | 600  | 570  | 509  |
| 135° | 706  | 729  | 706  | 729  | 706  | 545  |
| 145° | 819  | 831  | 819  | 831  | 819  | 512  |
| 155° | 902  | 902  | 902  | 902  | 902  | 415  |
| 165° | 950  | 948  | 950  | 948  | 950  | 268  |
| 175° | 972  | 966  | 972  | 966  | 972  | 92   |
| 180° | 970  | 970  | 970  | 970  | 970  |      |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (FULL):**

|        | 0°     | 5°     | 10°    | 15°    | 20°    | 22.5°  | 25°    | 30°    | 35°    | 40°    | 45°    |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 |
| 2.5°   | 1918.0 | 1926.0 | 1930.0 | 1935.3 | 1947.2 | 1955.1 | 1967.0 | 1969.7 | 1968.4 | 1973.7 | 1959.1 |
| 5°     | 1907.4 | 1924.7 | 1940.6 | 1953.8 | 1975.0 | 1988.2 | 2002.8 | 2020.0 | 2024.0 | 2043.9 | 2032.0 |
| 7.5°   | 1892.9 | 1918.0 | 1940.6 | 1967.0 | 1998.8 | 2016.1 | 2038.6 | 2065.1 | 2077.0 | 2100.8 | 2107.5 |
| 10°    | 1869.0 | 1904.8 | 1943.2 | 1971.0 | 2014.7 | 2045.2 | 2066.4 | 2108.8 | 2136.6 | 2172.4 | 2167.1 |
| 12.5°  | 1830.6 | 1877.0 | 1928.6 | 1975.0 | 2032.0 | 2051.8 | 2091.6 | 2135.3 | 2171.0 | 2204.2 | 2233.3 |
| 15°    | 1797.5 | 1850.5 | 1907.4 | 1964.4 | 2029.3 | 2066.4 | 2106.1 | 2163.1 | 2201.5 | 2259.8 | 2285.0 |
| 17.5°  | 1752.5 | 1820.0 | 1887.6 | 1951.1 | 2028.0 | 2070.4 | 2119.4 | 2175.0 | 2232.0 | 2287.6 | 2307.5 |
| 20°    | 1706.1 | 1779.0 | 1851.8 | 1937.9 | 2025.3 | 2066.4 | 2116.7 | 2185.6 | 2241.2 | 2285.0 | 2285.0 |
| 22.5°  | 1650.5 | 1739.2 | 1822.7 | 1904.8 | 2000.2 | 2059.8 | 2111.4 | 2192.2 | 2232.0 | 2241.2 | 2205.5 |
| 25°    | 1594.8 | 1683.6 | 1775.0 | 1877.0 | 1985.6 | 2038.6 | 2096.9 | 2172.4 | 2185.6 | 2148.5 | 2055.8 |
| 27.5°  | 1528.6 | 1627.9 | 1731.3 | 1841.2 | 1955.1 | 2021.4 | 2074.3 | 2124.7 | 2099.5 | 2000.2 | 1855.8 |
| 30°    | 1461.0 | 1568.3 | 1684.9 | 1789.5 | 1927.3 | 1988.2 | 2033.3 | 2047.8 | 1968.4 | 1806.8 | 1620.0 |
| 32.5°  | 1390.8 | 1495.5 | 1618.7 | 1744.5 | 1883.6 | 1941.9 | 1971.0 | 1932.6 | 1786.9 | 1582.9 | 1355.1 |
| 35°    | 1308.7 | 1426.6 | 1555.1 | 1686.2 | 1824.0 | 1867.7 | 1884.9 | 1790.9 | 1604.1 | 1340.5 | 1114.0 |
| 37.5°  | 1234.5 | 1352.4 | 1490.2 | 1624.0 | 1757.8 | 1781.6 | 1764.4 | 1617.3 | 1380.2 | 1119.3 | 898.1  |
| 40°    | 1147.1 | 1272.9 | 1408.1 | 1557.7 | 1667.7 | 1674.3 | 1631.9 | 1441.2 | 1147.1 | 902.1  | 765.6  |
| 42.5°  | 1066.3 | 1193.5 | 1328.6 | 1480.9 | 1564.4 | 1541.8 | 1484.9 | 1234.5 | 957.7  | 777.5  | 667.6  |
| 45°    | 982.9  | 1103.4 | 1249.1 | 1384.2 | 1443.8 | 1390.8 | 1304.7 | 1038.5 | 804.0  | 668.9  | 584.2  |
| 47.5°  | 902.1  | 1014.7 | 1159.0 | 1288.8 | 1299.4 | 1239.8 | 1137.8 | 870.3  | 696.7  | 588.1  | 519.2  |
| 50°    | 822.6  | 935.2  | 1070.3 | 1177.6 | 1167.0 | 1084.9 | 969.6  | 756.4  | 605.3  | 519.2  | 462.3  |
| 52.5°  | 743.1  | 845.1  | 976.2  | 1061.0 | 1016.0 | 936.5  | 822.6  | 641.1  | 528.5  | 453.0  | 409.3  |
| 55°    | 663.6  | 759.0  | 871.6  | 941.8  | 870.3  | 778.9  | 698.1  | 549.7  | 458.3  | 397.4  | 364.3  |
| 57.5°  | 597.4  | 672.9  | 776.2  | 818.6  | 732.5  | 661.0  | 590.8  | 472.9  | 397.4  | 353.7  | 315.3  |
| 60°    | 524.5  | 593.4  | 678.2  | 703.4  | 614.6  | 556.3  | 496.7  | 400.0  | 340.4  | 302.0  | 276.8  |
| 62.5°  | 462.3  | 519.2  | 584.2  | 584.2  | 506.0  | 462.3  | 417.3  | 335.1  | 286.1  | 255.6  | 243.7  |
| 65°    | 401.4  | 442.4  | 488.8  | 483.5  | 417.3  | 378.8  | 343.1  | 276.8  | 239.8  | 218.6  | 206.6  |
| 67.5°  | 341.7  | 373.5  | 404.0  | 385.5  | 337.8  | 304.7  | 271.5  | 223.9  | 198.7  | 184.1  | 168.2  |
| 70°    | 287.4  | 312.6  | 328.5  | 311.3  | 263.6  | 235.8  | 211.9  | 180.1  | 160.3  | 141.7  | 132.5  |
| 72.5°  | 241.1  | 251.7  | 257.0  | 235.8  | 196.0  | 180.1  | 162.9  | 140.4  | 123.2  | 113.9  | 111.3  |
| 75°    | 188.1  | 197.4  | 193.4  | 177.5  | 144.4  | 132.5  | 119.2  | 103.3  | 99.3   | 94.0   | 91.4   |
| 77.5°  | 147.0  | 147.0  | 140.4  | 125.8  | 103.3  | 94.0   | 88.7   | 80.8   | 76.8   | 75.5   | 72.9   |
| 80°    | 104.6  | 103.3  | 99.3   | 83.5   | 70.2   | 64.9   | 64.9   | 59.6   | 58.3   | 55.6   | 55.6   |
| 82.5°  | 68.9   | 68.9   | 63.6   | 50.3   | 46.4   | 45.0   | 43.7   | 41.1   | 41.1   | 39.7   | 39.7   |
| 85°    | 41.1   | 38.4   | 31.8   | 27.8   | 26.5   | 26.5   | 25.2   | 23.8   | 25.2   | 23.8   | 23.8   |
| 87.5°  | 18.5   | 14.6   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   |
| 90°    | 0.7    | 2.4    | 4.1    | 5.8    | 7.5    | 8.4    | 9.0    | 10.3   | 11.5   | 12.8   | 14.0   |
| 92.5°  | 17.5   | 16.9   | 16.3   | 15.6   | 15.0   | 14.7   | 14.9   | 15.4   | 15.9   | 16.3   | 16.8   |
| 95°    | 45.6   | 40.4   | 35.3   | 30.1   | 25.0   | 22.4   | 23.0   | 24.1   | 25.2   | 26.3   | 27.4   |
| 97.5°  | 82.1   | 69.3   | 56.5   | 43.8   | 31.0   | 24.6   | 25.8   | 28.3   | 30.8   | 33.3   | 35.8   |
| 100°   | 124.2  | 102.8  | 81.5   | 60.1   | 38.8   | 28.1   | 29.4   | 32.1   | 34.7   | 37.4   | 40.0   |
| 102.5° | 170.5  | 170.2  | 169.9  | 169.6  | 169.3  | 169.1  | 154.9  | 126.5  | 98.2   | 69.8   | 41.4   |
| 105°   | 213.3  | 218.0  | 222.6  | 227.3  | 232.0  | 234.3  | 213.0  | 170.5  | 127.9  | 85.4   | 42.8   |
| 107.5° | 263.1  | 267.0  | 270.9  | 274.8  | 278.7  | 280.6  | 254.3  | 201.8  | 149.3  | 96.7   | 44.2   |
| 110°   | 310.8  | 314.1  | 317.3  | 320.6  | 323.9  | 325.5  | 303.0  | 257.9  | 212.9  | 167.8  | 122.8  |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 0°    | 5°    | 10°   | 15°   | 20°   | 22.5° | 25°   | 30°   | 35°   | 40°   | 45°   |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 355.7 | 358.5 | 361.3 | 364.1 | 366.9 | 368.3 | 367.0 | 364.3 | 361.7 | 359.0 | 356.4 |
| 115°   | 403.4 | 406.0 | 408.7 | 411.3 | 414.0 | 415.3 | 417.2 | 421.1 | 425.0 | 428.9 | 432.8 |
| 117.5° | 444.8 | 447.9 | 451.0 | 454.1 | 457.2 | 458.8 | 460.1 | 462.8 | 465.4 | 468.1 | 470.7 |
| 120°   | 491.1 | 493.4 | 495.8 | 498.1 | 500.4 | 501.6 | 503.0 | 505.8 | 508.6 | 511.4 | 514.2 |
| 122.5° | 530.4 | 532.9 | 535.4 | 537.9 | 540.4 | 541.6 | 543.2 | 546.3 | 549.4 | 552.5 | 555.6 |
| 125°   | 570.3 | 572.3 | 574.4 | 576.4 | 578.5 | 579.5 | 581.0 | 583.9 | 586.9 | 589.8 | 592.8 |
| 127.5° | 606.8 | 609.0 | 611.2 | 613.3 | 615.5 | 616.6 | 617.8 | 620.1 | 622.5 | 624.8 | 627.2 |
| 130°   | 641.2 | 643.7 | 646.2 | 648.7 | 651.2 | 652.4 | 653.3 | 655.0 | 656.7 | 658.4 | 660.1 |
| 132.5° | 676.3 | 678.3 | 680.3 | 682.4 | 684.4 | 685.4 | 686.3 | 688.0 | 689.7 | 691.4 | 693.1 |
| 135°   | 705.7 | 708.2 | 710.7 | 713.2 | 715.7 | 717.0 | 717.7 | 719.1 | 720.5 | 721.9 | 723.3 |
| 137.5° | 736.6 | 738.5 | 740.3 | 742.2 | 744.1 | 745.0 | 745.8 | 747.3 | 748.9 | 750.4 | 752.0 |
| 140°   | 766.8 | 768.0 | 769.3 | 770.5 | 771.8 | 772.4 | 773.3 | 775.0 | 776.7 | 778.4 | 780.1 |
| 142.5° | 792.0 | 793.1 | 794.2 | 795.3 | 796.4 | 796.9 | 797.9 | 800.0 | 802.0 | 804.1 | 806.1 |
| 145°   | 818.7 | 818.5 | 818.4 | 818.2 | 818.1 | 818.0 | 819.3 | 822.0 | 824.6 | 827.3 | 829.9 |
| 147.5° | 841.8 | 841.3 | 840.9 | 840.4 | 839.9 | 839.7 | 841.0 | 843.7 | 846.4 | 849.0 | 851.7 |
| 150°   | 864.3 | 863.2 | 862.1 | 861.0 | 859.9 | 859.4 | 860.6 | 863.1 | 865.6 | 868.1 | 870.6 |
| 152.5° | 883.2 | 882.0 | 880.7 | 879.5 | 878.2 | 877.6 | 878.8 | 881.1 | 883.4 | 885.8 | 888.1 |
| 155°   | 901.5 | 900.1 | 898.7 | 897.3 | 895.9 | 895.2 | 896.1 | 898.0 | 899.9 | 901.7 | 903.6 |
| 157.5° | 916.2 | 915.0 | 913.7 | 912.5 | 911.2 | 910.6 | 911.3 | 912.7 | 914.1 | 915.5 | 916.9 |
| 160°   | 928.8 | 927.9 | 926.9 | 926.0 | 925.1 | 924.6 | 925.1 | 926.0 | 926.9 | 927.9 | 928.8 |
| 162.5° | 940.1 | 939.1 | 938.2 | 937.2 | 936.3 | 935.8 | 936.2 | 937.0 | 937.8 | 938.6 | 939.4 |
| 165°   | 949.9 | 949.0 | 948.0 | 947.1 | 946.2 | 945.7 | 945.9 | 946.4 | 946.9 | 947.3 | 947.8 |
| 167.5° | 957.6 | 956.7 | 955.7 | 954.8 | 953.9 | 953.4 | 953.6 | 954.1 | 954.6 | 955.0 | 955.5 |
| 170°   | 963.9 | 963.0 | 962.0 | 961.1 | 960.2 | 959.7 | 959.9 | 960.2 | 960.5 | 960.8 | 961.1 |
| 172.5° | 968.1 | 967.2 | 966.2 | 965.3 | 964.4 | 963.9 | 964.1 | 964.4 | 964.7 | 965.0 | 965.3 |
| 175°   | 971.6 | 970.5 | 969.4 | 968.3 | 967.2 | 966.7 | 966.9 | 967.2 | 967.5 | 967.8 | 968.1 |
| 177.5° | 973.0 | 971.9 | 970.8 | 969.7 | 968.6 | 968.1 | 968.2 | 968.3 | 968.5 | 968.6 | 968.8 |
| 180°   | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 50°    | 55°    | 60°    | 65°    | 67.5°  | 70°    | 75°    | 80°    | 85°    | 90°    | 95°    |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 |
| 2.5°   | 1973.7 | 1976.3 | 1980.3 | 1998.8 | 2001.5 | 2006.8 | 2004.1 | 2004.1 | 2005.5 | 2002.8 | 2004.1 |
| 5°     | 2058.4 | 2062.4 | 2082.3 | 2104.8 | 2110.1 | 2104.8 | 2111.4 | 2120.7 | 2120.7 | 2120.7 | 2118.1 |
| 7.5°   | 2137.9 | 2152.5 | 2175.0 | 2208.1 | 2214.7 | 2221.4 | 2233.3 | 2225.3 | 2228.0 | 2239.9 | 2235.9 |
| 10°    | 2214.7 | 2235.9 | 2261.1 | 2288.9 | 2303.5 | 2312.8 | 2318.1 | 2330.0 | 2357.8 | 2326.0 | 2337.9 |
| 12.5°  | 2287.6 | 2318.1 | 2344.6 | 2375.0 | 2385.6 | 2397.5 | 2401.5 | 2412.1 | 2412.1 | 2410.8 | 2420.1 |
| 15°    | 2335.3 | 2363.1 | 2386.9 | 2406.8 | 2409.5 | 2406.8 | 2404.2 | 2405.5 | 2409.5 | 2393.6 | 2402.8 |
| 17.5°  | 2345.9 | 2348.5 | 2356.5 | 2348.5 | 2349.9 | 2322.0 | 2306.1 | 2302.2 | 2265.1 | 2266.4 | 2296.9 |
| 20°    | 2294.2 | 2249.2 | 2237.3 | 2193.6 | 2167.1 | 2095.5 | 2092.9 | 2073.0 | 1994.9 | 2018.7 | 2013.4 |
| 22.5°  | 2152.5 | 2075.7 | 1973.7 | 1923.3 | 1898.2 | 1822.7 | 1764.4 | 1723.3 | 1695.5 | 1667.7 | 1655.8 |
| 25°    | 1965.7 | 1841.2 | 1696.8 | 1597.5 | 1582.9 | 1512.7 | 1405.4 | 1355.1 | 1295.5 | 1276.9 | 1308.7 |
| 27.5°  | 1724.6 | 1563.0 | 1400.1 | 1247.8 | 1220.0 | 1156.4 | 1102.1 | 1066.3 | 997.4  | 993.5  | 996.1  |
| 30°    | 1397.5 | 1234.5 | 1098.1 | 998.8  | 929.9  | 900.7  | 865.0  | 838.5  | 810.7  | 821.3  | 823.9  |
| 32.5°  | 1148.4 | 993.5  | 866.3  | 813.3  | 781.5  | 763.0  | 732.5  | 715.3  | 703.4  | 699.4  | 698.1  |
| 35°    | 912.7  | 809.3  | 752.4  | 700.7  | 682.2  | 668.9  | 646.4  | 638.5  | 627.9  | 629.2  | 629.2  |
| 37.5°  | 781.5  | 695.4  | 653.0  | 626.5  | 609.3  | 602.7  | 588.1  | 580.2  | 573.6  | 570.9  | 574.9  |
| 40°    | 674.2  | 614.6  | 588.1  | 564.3  | 549.7  | 547.1  | 539.1  | 529.8  | 521.9  | 523.2  | 527.2  |
| 42.5°  | 596.1  | 561.6  | 529.8  | 511.3  | 500.7  | 496.7  | 490.1  | 483.5  | 483.5  | 479.5  | 478.2  |
| 45°    | 533.8  | 506.0  | 479.5  | 462.3  | 455.7  | 450.4  | 442.4  | 441.1  | 435.8  | 437.1  | 438.4  |
| 47.5°  | 478.2  | 455.7  | 435.8  | 418.6  | 412.0  | 410.6  | 402.7  | 397.4  | 397.4  | 396.1  | 394.7  |
| 50°    | 427.8  | 405.3  | 388.1  | 378.8  | 369.6  | 366.9  | 365.6  | 364.3  | 361.6  | 361.6  | 362.9  |
| 52.5°  | 386.8  | 364.3  | 351.0  | 343.1  | 337.8  | 335.1  | 335.1  | 333.8  | 333.8  | 333.8  | 332.5  |
| 55°    | 341.7  | 323.2  | 312.6  | 310.0  | 307.3  | 306.0  | 304.7  | 302.0  | 300.7  | 303.3  | 300.7  |
| 57.5°  | 299.4  | 292.7  | 283.5  | 280.8  | 274.2  | 274.2  | 270.2  | 267.6  | 264.9  | 267.6  | 267.6  |
| 60°    | 266.2  | 257.0  | 251.7  | 243.7  | 238.4  | 233.1  | 226.5  | 225.2  | 222.5  | 221.2  | 219.9  |
| 62.5°  | 231.8  | 223.9  | 210.6  | 198.7  | 190.7  | 185.4  | 182.8  | 181.5  | 181.5  | 180.1  | 180.1  |
| 65°    | 193.4  | 174.8  | 168.2  | 164.3  | 162.9  | 161.6  | 159.0  | 157.6  | 159.0  | 157.6  | 159.0  |
| 67.5°  | 151.0  | 148.4  | 144.4  | 141.7  | 140.4  | 139.1  | 139.1  | 137.8  | 137.8  | 137.8  | 137.8  |
| 70°    | 131.1  | 124.5  | 123.2  | 120.5  | 120.5  | 119.2  | 119.2  | 119.2  | 119.2  | 117.9  | 120.5  |
| 72.5°  | 108.6  | 104.6  | 103.3  | 102.0  | 102.0  | 102.0  | 100.7  | 100.7  | 100.7  | 99.3   | 100.7  |
| 75°    | 88.7   | 87.4   | 84.8   | 84.8   | 83.5   | 84.8   | 83.5   | 83.5   | 82.1   | 83.5   | 83.5   |
| 77.5°  | 71.5   | 70.2   | 68.9   | 68.9   | 67.6   | 67.6   | 67.6   | 67.6   | 67.6   | 67.6   | 68.9   |
| 80°    | 54.3   | 53.0   | 51.7   | 53.0   | 51.7   | 53.0   | 51.7   | 51.7   | 53.0   | 51.7   | 51.7   |
| 82.5°  | 39.7   | 38.4   | 38.4   | 37.1   | 37.1   | 37.1   | 37.1   | 37.1   | 37.1   | 37.1   | 37.1   |
| 85°    | 23.8   | 22.5   | 22.5   | 23.8   | 22.5   | 23.8   | 22.5   | 22.5   | 22.5   | 23.8   | 23.8   |
| 87.5°  | 10.6   | 11.9   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   | 10.6   | 11.9   |
| 90°    | 14.8   | 15.6   | 16.3   | 17.1   | 17.5   | 17.7   | 18.0   | 18.3   | 18.6   | 18.9   | 18.6   |
| 92.5°  | 17.1   | 17.4   | 17.7   | 18.0   | 18.2   | 18.3   | 18.4   | 18.6   | 18.7   | 18.9   | 18.7   |
| 95°    | 28.2   | 29.0   | 29.7   | 30.5   | 30.9   | 30.8   | 30.7   | 30.5   | 30.4   | 30.2   | 30.4   |
| 97.5°  | 36.3   | 36.7   | 37.2   | 37.7   | 37.9   | 38.0   | 38.1   | 38.3   | 38.4   | 38.6   | 38.4   |
| 100°   | 41.2   | 42.5   | 43.7   | 45.0   | 45.6   | 45.8   | 46.1   | 46.4   | 46.7   | 47.0   | 46.7   |
| 102.5° | 43.1   | 44.8   | 46.5   | 48.2   | 49.1   | 49.3   | 49.8   | 50.3   | 50.7   | 51.2   | 50.7   |
| 105°   | 44.5   | 46.2   | 47.9   | 49.6   | 50.5   | 50.8   | 51.4   | 52.1   | 52.7   | 53.3   | 52.7   |
| 107.5° | 45.9   | 47.6   | 49.3   | 51.0   | 51.9   | 52.2   | 52.8   | 53.5   | 54.1   | 54.7   | 54.1   |
| 110°   | 107.2  | 91.6   | 76.0   | 60.4   | 52.6   | 52.9   | 53.5   | 54.2   | 54.8   | 55.4   | 54.8   |



TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 50°   | 55°   | 60°   | 65°   | 67.5° | 70°   | 75°   | 80°   | 85°   | 90°   | 95°   |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 289.2 | 222.0 | 154.8 | 87.6  | 54.0  | 54.2  | 54.7  | 55.2  | 55.6  | 56.1  | 55.6  |
| 115°   | 360.6 | 288.4 | 216.3 | 144.1 | 108.0 | 102.4 | 91.2  | 79.9  | 68.7  | 57.5  | 68.7  |
| 117.5° | 448.4 | 426.1 | 403.8 | 381.5 | 370.4 | 350.0 | 309.1 | 268.3 | 227.4 | 186.6 | 227.4 |
| 120°   | 516.1 | 517.9 | 519.8 | 521.7 | 522.6 | 512.1 | 491.0 | 470.0 | 448.9 | 427.9 | 448.9 |
| 122.5° | 556.5 | 557.5 | 558.4 | 559.3 | 559.8 | 559.9 | 560.0 | 560.2 | 560.3 | 560.5 | 560.3 |
| 125°   | 593.9 | 595.0 | 596.1 | 597.2 | 597.7 | 597.9 | 598.4 | 598.9 | 599.3 | 599.8 | 599.3 |
| 127.5° | 628.8 | 630.3 | 631.9 | 633.4 | 634.2 | 634.3 | 634.4 | 634.6 | 634.7 | 634.9 | 634.7 |
| 130°   | 661.8 | 663.6 | 665.3 | 667.0 | 667.9 | 667.8 | 667.7 | 667.5 | 667.4 | 667.2 | 667.4 |
| 132.5° | 694.5 | 695.9 | 697.3 | 698.7 | 699.4 | 699.3 | 699.2 | 699.0 | 698.9 | 698.7 | 698.9 |
| 135°   | 724.9 | 726.4 | 728.0 | 729.5 | 730.3 | 730.1 | 729.8 | 729.5 | 729.2 | 728.9 | 729.2 |
| 137.5° | 753.6 | 755.2 | 756.7 | 758.3 | 759.1 | 758.9 | 758.4 | 757.9 | 757.5 | 757.0 | 757.5 |
| 140°   | 781.5 | 782.9 | 784.3 | 785.7 | 786.4 | 786.0 | 785.2 | 784.5 | 783.7 | 782.9 | 783.7 |
| 142.5° | 807.3 | 808.6 | 809.8 | 811.1 | 811.7 | 811.3 | 810.5 | 809.8 | 809.0 | 808.2 | 809.0 |
| 145°   | 831.0 | 832.1 | 833.2 | 834.3 | 834.8 | 834.4 | 833.6 | 832.9 | 832.1 | 831.3 | 832.1 |
| 147.5° | 852.5 | 853.3 | 854.0 | 854.8 | 855.2 | 854.9 | 854.3 | 853.6 | 853.0 | 852.4 | 853.0 |
| 150°   | 871.5 | 872.5 | 873.4 | 874.3 | 874.8 | 874.4 | 873.6 | 872.9 | 872.1 | 871.3 | 872.1 |
| 152.5° | 889.1 | 890.0 | 891.0 | 891.9 | 892.4 | 891.8 | 890.7 | 889.6 | 888.5 | 887.4 | 888.5 |
| 155°   | 904.5 | 905.5 | 906.4 | 907.3 | 907.8 | 907.2 | 905.9 | 904.7 | 903.4 | 902.2 | 903.4 |
| 157.5° | 918.0 | 919.1 | 920.2 | 921.3 | 921.8 | 921.2 | 919.9 | 918.7 | 917.4 | 916.2 | 917.4 |
| 160°   | 929.7 | 930.7 | 931.6 | 932.5 | 933.0 | 932.5 | 931.4 | 930.3 | 929.2 | 928.1 | 929.2 |
| 162.5° | 940.5 | 941.6 | 942.7 | 943.8 | 944.3 | 943.6 | 942.2 | 940.8 | 939.4 | 938.0 | 939.4 |
| 165°   | 948.9 | 950.0 | 951.1 | 952.2 | 952.7 | 952.2 | 951.1 | 950.0 | 948.9 | 947.8 | 948.9 |
| 167.5° | 956.6 | 957.7 | 958.8 | 959.9 | 960.4 | 959.7 | 958.3 | 956.9 | 955.5 | 954.1 | 955.5 |
| 170°   | 962.2 | 963.3 | 964.4 | 965.5 | 966.0 | 965.3 | 963.9 | 962.5 | 961.1 | 959.7 | 961.1 |
| 172.5° | 966.4 | 967.5 | 968.6 | 969.7 | 970.2 | 969.5 | 968.1 | 966.7 | 965.3 | 963.9 | 965.3 |
| 175°   | 969.2 | 970.3 | 971.4 | 972.5 | 973.0 | 972.2 | 970.7 | 969.1 | 967.6 | 966.0 | 967.6 |
| 177.5° | 969.9 | 971.0 | 972.1 | 973.2 | 973.7 | 973.0 | 971.6 | 970.2 | 968.8 | 967.4 | 968.8 |
| 180°   | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 100°   | 105°   | 110°   | 112.5° | 115°   | 120°   | 125°   | 130°   | 135°   | 140°   | 145°   |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 |
| 2.5°   | 2009.4 | 2000.2 | 1997.5 | 2000.2 | 1997.5 | 1998.8 | 1989.6 | 1955.1 | 1964.4 | 1949.8 | 1957.8 |
| 5°     | 2123.3 | 2115.4 | 2098.2 | 2095.5 | 2092.9 | 2090.2 | 2077.0 | 2046.5 | 2034.6 | 2014.7 | 2013.4 |
| 7.5°   | 2232.0 | 2232.0 | 2218.7 | 2209.4 | 2197.5 | 2188.3 | 2171.0 | 2126.0 | 2107.5 | 2083.6 | 2070.4 |
| 10°    | 2339.3 | 2304.8 | 2319.4 | 2310.1 | 2281.0 | 2275.7 | 2243.9 | 2217.4 | 2181.6 | 2157.8 | 2136.6 |
| 12.5°  | 2416.1 | 2405.5 | 2392.2 | 2384.3 | 2376.3 | 2359.1 | 2337.9 | 2270.4 | 2251.8 | 2204.2 | 2180.3 |
| 15°    | 2413.4 | 2406.8 | 2410.8 | 2410.8 | 2408.1 | 2404.2 | 2386.9 | 2337.9 | 2306.1 | 2259.8 | 2218.7 |
| 17.5°  | 2283.6 | 2300.8 | 2318.1 | 2330.0 | 2356.5 | 2368.4 | 2384.3 | 2355.2 | 2335.3 | 2295.5 | 2251.8 |
| 20°    | 2057.1 | 2099.5 | 2149.8 | 2160.4 | 2184.3 | 2254.5 | 2286.3 | 2311.4 | 2319.4 | 2306.1 | 2270.4 |
| 22.5°  | 1741.9 | 1777.6 | 1899.5 | 1896.8 | 1931.3 | 2014.7 | 2107.5 | 2183.0 | 2242.6 | 2275.7 | 2262.4 |
| 25°    | 1364.3 | 1414.7 | 1479.6 | 1528.6 | 1641.2 | 1765.7 | 1880.9 | 2001.5 | 2104.8 | 2196.2 | 2218.7 |
| 27.5°  | 1031.9 | 1098.1 | 1149.8 | 1214.7 | 1271.6 | 1418.7 | 1567.0 | 1755.1 | 1875.6 | 2049.2 | 2139.2 |
| 30°    | 834.5  | 865.0  | 916.6  | 947.1  | 974.9  | 1087.5 | 1255.7 | 1441.2 | 1653.1 | 1853.1 | 2008.1 |
| 32.5°  | 712.6  | 733.8  | 772.2  | 785.5  | 814.6  | 890.1  | 996.1  | 1165.7 | 1384.2 | 1626.6 | 1830.6 |
| 35°    | 639.8  | 662.3  | 670.3  | 682.2  | 706.0  | 753.7  | 826.6  | 949.7  | 1147.1 | 1384.2 | 1627.9 |
| 37.5°  | 577.5  | 589.5  | 612.0  | 619.9  | 627.9  | 663.6  | 712.6  | 798.7  | 929.9  | 1124.6 | 1394.8 |
| 40°    | 533.8  | 540.4  | 552.4  | 559.0  | 564.3  | 589.5  | 633.2  | 691.4  | 788.1  | 936.5  | 1185.5 |
| 42.5°  | 487.5  | 495.4  | 503.4  | 511.3  | 517.9  | 537.8  | 564.3  | 619.9  | 684.8  | 797.4  | 977.6  |
| 45°    | 442.4  | 447.7  | 457.0  | 462.3  | 471.6  | 487.5  | 511.3  | 549.7  | 608.0  | 679.5  | 825.2  |
| 47.5°  | 401.4  | 408.0  | 412.0  | 418.6  | 425.2  | 442.4  | 464.9  | 490.1  | 537.8  | 608.0  | 714.0  |
| 50°    | 364.3  | 372.2  | 377.5  | 378.8  | 384.1  | 400.0  | 418.6  | 446.4  | 476.9  | 531.2  | 623.9  |
| 52.5°  | 337.8  | 339.1  | 343.1  | 348.4  | 347.0  | 356.3  | 373.5  | 394.7  | 426.5  | 470.2  | 537.8  |
| 55°    | 307.3  | 311.3  | 313.9  | 315.3  | 315.3  | 323.2  | 332.5  | 352.3  | 377.5  | 413.3  | 470.2  |
| 57.5°  | 268.9  | 272.9  | 280.8  | 283.5  | 287.4  | 291.4  | 295.4  | 308.6  | 329.8  | 364.3  | 410.6  |
| 60°    | 229.2  | 231.8  | 239.8  | 245.1  | 247.7  | 258.3  | 263.6  | 274.2  | 286.1  | 311.3  | 355.0  |
| 62.5°  | 184.1  | 186.8  | 190.7  | 196.0  | 201.3  | 217.2  | 230.5  | 241.1  | 250.4  | 267.6  | 303.3  |
| 65°    | 160.3  | 161.6  | 164.3  | 165.6  | 166.9  | 173.5  | 185.4  | 200.0  | 217.2  | 230.5  | 251.7  |
| 67.5°  | 139.1  | 140.4  | 141.7  | 144.4  | 145.7  | 147.0  | 152.3  | 156.3  | 173.5  | 192.1  | 208.0  |
| 70°    | 119.2  | 121.9  | 123.2  | 123.2  | 124.5  | 127.2  | 129.8  | 135.1  | 140.4  | 149.7  | 169.6  |
| 72.5°  | 100.7  | 102.0  | 104.6  | 104.6  | 104.6  | 107.3  | 109.9  | 112.6  | 115.2  | 120.5  | 128.5  |
| 75°    | 83.5   | 86.1   | 86.1   | 86.1   | 87.4   | 87.4   | 90.1   | 92.7   | 95.4   | 99.3   | 102.0  |
| 77.5°  | 68.9   | 68.9   | 68.9   | 68.9   | 70.2   | 70.2   | 71.5   | 74.2   | 75.5   | 76.8   | 79.5   |
| 80°    | 51.7   | 53.0   | 53.0   | 53.0   | 54.3   | 54.3   | 54.3   | 57.0   | 58.3   | 58.3   | 60.9   |
| 82.5°  | 38.4   | 38.4   | 38.4   | 39.7   | 38.4   | 39.7   | 39.7   | 41.1   | 39.7   | 41.1   | 42.4   |
| 85°    | 23.8   | 23.8   | 23.8   | 25.2   | 25.2   | 25.2   | 25.2   | 25.2   | 25.2   | 25.2   | 26.5   |
| 87.5°  | 11.9   | 11.9   | 11.9   | 11.9   | 11.9   | 11.9   | 11.9   | 11.9   | 13.2   | 11.9   | 11.9   |
| 90°    | 18.3   | 18.0   | 17.7   | 17.5   | 17.1   | 16.3   | 15.6   | 14.8   | 14.0   | 12.8   | 11.5   |
| 92.5°  | 18.6   | 18.4   | 18.3   | 18.2   | 18.0   | 17.7   | 17.4   | 17.1   | 16.8   | 16.3   | 15.9   |
| 95°    | 30.5   | 30.7   | 30.8   | 30.9   | 30.5   | 29.7   | 29.0   | 28.2   | 27.4   | 26.3   | 25.2   |
| 97.5°  | 38.3   | 38.1   | 38.0   | 37.9   | 37.7   | 37.2   | 36.7   | 36.3   | 35.8   | 33.3   | 30.8   |
| 100°   | 46.4   | 46.1   | 45.8   | 45.6   | 45.0   | 43.7   | 42.5   | 41.2   | 40.0   | 37.4   | 34.7   |
| 102.5° | 50.3   | 49.8   | 49.3   | 49.1   | 48.2   | 46.5   | 44.8   | 43.1   | 41.4   | 39.8   | 38.2   |
| 105°   | 52.1   | 51.4   | 50.8   | 50.5   | 49.6   | 47.9   | 46.2   | 44.5   | 42.8   | 41.4   | 40.0   |
| 107.5° | 53.5   | 52.8   | 52.2   | 51.9   | 51.0   | 49.3   | 47.6   | 45.9   | 44.2   | 42.8   | 41.4   |
| 110°   | 54.2   | 53.5   | 52.9   | 52.6   | 50.4   | 48.7   | 47.0   | 45.3   | 43.6   | 41.9   | 40.2   |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 100°  | 105°  | 110°  | 112.5° | 115°  | 120°  | 125°  | 130°  | 135°  | 140°  | 145°  |
|--------|-------|-------|-------|--------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 55.2  | 54.7  | 54.2  | 54.0   | 87.6  | 154.8 | 222.0 | 289.2 | 356.4 | 359.0 | 361.7 |
| 115°   | 79.9  | 91.2  | 102.4 | 108.0  | 144.1 | 216.3 | 288.4 | 360.6 | 432.8 | 428.9 | 425.0 |
| 117.5° | 268.3 | 309.1 | 350.0 | 370.4  | 381.5 | 403.8 | 426.1 | 448.4 | 470.7 | 468.1 | 465.4 |
| 120°   | 470.0 | 491.0 | 512.1 | 522.6  | 521.7 | 519.8 | 517.9 | 516.1 | 514.2 | 511.4 | 508.6 |
| 122.5° | 560.2 | 560.0 | 559.9 | 559.8  | 559.3 | 558.4 | 557.5 | 556.5 | 555.6 | 552.5 | 549.4 |
| 125°   | 598.9 | 598.4 | 597.9 | 597.7  | 597.2 | 596.1 | 595.0 | 593.9 | 592.8 | 589.8 | 586.9 |
| 127.5° | 634.6 | 634.4 | 634.3 | 634.2  | 633.4 | 631.9 | 630.3 | 628.8 | 627.2 | 624.8 | 622.5 |
| 130°   | 667.5 | 667.7 | 667.8 | 667.9  | 667.0 | 665.3 | 663.6 | 661.8 | 660.1 | 658.4 | 656.7 |
| 132.5° | 699.0 | 699.2 | 699.3 | 699.4  | 698.7 | 697.3 | 695.9 | 694.5 | 693.1 | 691.4 | 689.7 |
| 135°   | 729.5 | 729.8 | 730.1 | 730.3  | 729.5 | 728.0 | 726.4 | 724.9 | 723.3 | 721.9 | 720.5 |
| 137.5° | 757.9 | 758.4 | 758.9 | 759.1  | 758.3 | 756.7 | 755.2 | 753.6 | 752.0 | 750.4 | 748.9 |
| 140°   | 784.5 | 785.2 | 786.0 | 786.4  | 785.7 | 784.3 | 782.9 | 781.5 | 780.1 | 778.4 | 776.7 |
| 142.5° | 809.8 | 810.5 | 811.3 | 811.7  | 811.1 | 809.8 | 808.6 | 807.3 | 806.1 | 804.1 | 802.0 |
| 145°   | 832.9 | 833.6 | 834.4 | 834.8  | 834.3 | 833.2 | 832.1 | 831.0 | 829.9 | 827.3 | 824.6 |
| 147.5° | 853.6 | 854.3 | 854.9 | 855.2  | 854.8 | 854.0 | 853.3 | 852.5 | 851.7 | 849.0 | 846.4 |
| 150°   | 872.9 | 873.6 | 874.4 | 874.8  | 874.3 | 873.4 | 872.5 | 871.5 | 870.6 | 868.1 | 865.6 |
| 152.5° | 889.6 | 890.7 | 891.8 | 892.4  | 891.9 | 891.0 | 890.0 | 889.1 | 888.1 | 885.8 | 883.4 |
| 155°   | 904.7 | 905.9 | 907.2 | 907.8  | 907.3 | 906.4 | 905.5 | 904.5 | 903.6 | 901.7 | 899.9 |
| 157.5° | 918.7 | 919.9 | 921.2 | 921.8  | 921.3 | 920.2 | 919.1 | 918.0 | 916.9 | 915.5 | 914.1 |
| 160°   | 930.3 | 931.4 | 932.5 | 933.0  | 932.5 | 931.6 | 930.7 | 929.7 | 928.8 | 927.9 | 926.9 |
| 162.5° | 940.8 | 942.2 | 943.6 | 944.3  | 943.8 | 942.7 | 941.6 | 940.5 | 939.4 | 938.6 | 937.8 |
| 165°   | 950.0 | 951.1 | 952.2 | 952.7  | 952.2 | 951.1 | 950.0 | 948.9 | 947.8 | 947.3 | 946.9 |
| 167.5° | 956.9 | 958.3 | 959.7 | 960.4  | 959.9 | 958.8 | 957.7 | 956.6 | 955.5 | 955.0 | 954.6 |
| 170°   | 962.5 | 963.9 | 965.3 | 966.0  | 965.5 | 964.4 | 963.3 | 962.2 | 961.1 | 960.8 | 960.5 |
| 172.5° | 966.7 | 968.1 | 969.5 | 970.2  | 969.7 | 968.6 | 967.5 | 966.4 | 965.3 | 965.0 | 964.7 |
| 175°   | 969.1 | 970.7 | 972.2 | 973.0  | 972.5 | 971.4 | 970.3 | 969.2 | 968.1 | 967.8 | 967.5 |
| 177.5° | 970.2 | 971.6 | 973.0 | 973.7  | 973.2 | 972.1 | 971.0 | 969.9 | 968.8 | 968.6 | 968.5 |
| 180°   | 969.5 | 969.5 | 969.5 | 969.5  | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 150°   | 155°   | 157.5° | 160°   | 165°   | 170°   | 175°   | 180°   | 185°   | 190°   | 195°   |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 |
| 2.5°   | 1945.9 | 1939.2 | 1939.2 | 1935.3 | 1935.3 | 1914.1 | 1914.1 | 1920.7 | 1912.7 | 1903.5 | 1890.2 |
| 5°     | 1996.2 | 1981.6 | 1977.6 | 1972.3 | 1955.1 | 1928.6 | 1918.0 | 1914.1 | 1898.2 | 1878.3 | 1855.8 |
| 7.5°   | 2043.9 | 2020.0 | 2008.1 | 1996.2 | 1973.7 | 1936.6 | 1915.4 | 1900.8 | 1877.0 | 1846.5 | 1817.4 |
| 10°    | 2090.2 | 2059.8 | 2029.3 | 2014.7 | 1982.9 | 1936.6 | 1906.1 | 1882.3 | 1847.8 | 1806.8 | 1765.7 |
| 12.5°  | 2132.6 | 2069.0 | 2063.7 | 2034.6 | 1988.2 | 1935.3 | 1888.9 | 1854.5 | 1810.7 | 1763.1 | 1715.4 |
| 15°    | 2169.7 | 2104.8 | 2073.0 | 2046.5 | 1985.6 | 1919.4 | 1870.3 | 1828.0 | 1769.7 | 1715.4 | 1657.1 |
| 17.5°  | 2188.3 | 2118.1 | 2096.9 | 2053.1 | 1990.9 | 1904.8 | 1838.6 | 1786.9 | 1723.3 | 1658.4 | 1592.2 |
| 20°    | 2206.8 | 2124.7 | 2090.2 | 2059.8 | 1975.0 | 1877.0 | 1802.8 | 1743.2 | 1673.0 | 1596.2 | 1523.3 |
| 22.5°  | 2216.1 | 2124.7 | 2083.6 | 2041.2 | 1959.1 | 1846.5 | 1759.1 | 1688.9 | 1606.8 | 1528.6 | 1441.2 |
| 25°    | 2200.2 | 2116.7 | 2067.7 | 2024.0 | 1931.3 | 1809.4 | 1708.7 | 1629.3 | 1541.8 | 1453.1 | 1364.3 |
| 27.5°  | 2160.4 | 2098.2 | 2041.2 | 1996.2 | 1892.9 | 1761.7 | 1655.8 | 1565.7 | 1475.6 | 1376.3 | 1286.2 |
| 30°    | 2086.3 | 2058.4 | 2013.4 | 1963.1 | 1850.5 | 1719.3 | 1593.5 | 1500.8 | 1401.4 | 1302.1 | 1208.0 |
| 32.5°  | 1971.0 | 1994.9 | 1965.7 | 1922.0 | 1800.1 | 1661.1 | 1527.3 | 1433.2 | 1324.6 | 1217.3 | 1131.2 |
| 35°    | 1830.6 | 1915.4 | 1899.5 | 1869.0 | 1747.2 | 1598.8 | 1465.0 | 1351.1 | 1242.5 | 1133.9 | 1047.8 |
| 37.5°  | 1677.0 | 1805.4 | 1818.7 | 1800.1 | 1686.2 | 1535.2 | 1388.2 | 1276.9 | 1165.7 | 1055.7 | 968.3  |
| 40°    | 1466.3 | 1663.7 | 1706.1 | 1714.0 | 1622.6 | 1458.4 | 1304.7 | 1196.1 | 1086.2 | 978.9  | 872.9  |
| 42.5°  | 1272.9 | 1522.0 | 1575.0 | 1608.1 | 1541.8 | 1382.9 | 1227.9 | 1107.4 | 998.8  | 902.1  | 796.1  |
| 45°    | 1091.5 | 1351.1 | 1437.2 | 1479.6 | 1450.4 | 1296.8 | 1136.5 | 1023.9 | 924.6  | 835.8  | 733.8  |
| 47.5°  | 904.7  | 1165.7 | 1286.2 | 1353.8 | 1353.8 | 1209.4 | 1049.1 | 937.8  | 842.5  | 766.9  | 676.9  |
| 50°    | 780.2  | 997.4  | 1121.9 | 1210.7 | 1234.5 | 1120.6 | 969.6  | 861.0  | 770.9  | 688.8  | 619.9  |
| 52.5°  | 665.0  | 859.7  | 963.0  | 1055.7 | 1124.6 | 1025.2 | 880.9  | 782.8  | 694.1  | 617.3  | 563.0  |
| 55°    | 574.9  | 720.6  | 814.6  | 916.6  | 993.5  | 928.6  | 794.8  | 699.4  | 622.6  | 559.0  | 512.6  |
| 57.5°  | 488.8  | 615.9  | 692.8  | 782.8  | 865.0  | 816.0  | 708.7  | 626.5  | 559.0  | 503.4  | 462.3  |
| 60°    | 415.9  | 519.2  | 578.9  | 649.1  | 751.1  | 716.6  | 627.9  | 552.4  | 498.1  | 447.7  | 413.3  |
| 62.5°  | 353.7  | 435.8  | 486.1  | 536.5  | 629.2  | 613.3  | 544.4  | 486.1  | 439.8  | 397.4  | 368.2  |
| 65°    | 290.1  | 357.6  | 397.4  | 441.1  | 515.3  | 521.9  | 466.3  | 425.2  | 382.8  | 345.7  | 319.2  |
| 67.5°  | 234.5  | 287.4  | 323.2  | 360.3  | 419.9  | 438.4  | 400.0  | 365.6  | 329.8  | 299.4  | 275.5  |
| 70°    | 189.4  | 226.5  | 253.0  | 282.1  | 331.2  | 353.7  | 333.8  | 310.0  | 280.8  | 255.6  | 234.5  |
| 72.5°  | 149.7  | 173.5  | 189.4  | 211.9  | 251.7  | 274.2  | 272.9  | 251.7  | 230.5  | 213.3  | 196.0  |
| 75°    | 109.9  | 128.5  | 141.7  | 156.3  | 188.1  | 209.3  | 214.6  | 205.3  | 184.1  | 170.9  | 157.6  |
| 77.5°  | 83.5   | 94.0   | 100.7  | 111.3  | 133.8  | 152.3  | 160.3  | 157.6  | 143.1  | 132.5  | 123.2  |
| 80°    | 63.6   | 66.2   | 68.9   | 72.9   | 91.4   | 108.6  | 113.9  | 112.6  | 104.6  | 100.7  | 90.1   |
| 82.5°  | 45.0   | 46.4   | 47.7   | 49.0   | 55.6   | 70.2   | 75.5   | 78.2   | 71.5   | 67.6   | 58.3   |
| 85°    | 26.5   | 27.8   | 27.8   | 30.5   | 31.8   | 35.8   | 45.0   | 45.0   | 43.7   | 38.4   | 37.1   |
| 87.5°  | 13.2   | 13.2   | 11.9   | 11.9   | 13.2   | 14.6   | 17.2   | 19.9   | 17.2   | 15.9   | 14.6   |
| 90°    | 10.3   | 9.0    | 8.4    | 7.5    | 5.8    | 4.1    | 2.4    | 0.7    | 2.4    | 4.1    | 5.8    |
| 92.5°  | 15.4   | 14.9   | 14.7   | 15.0   | 15.6   | 16.3   | 16.9   | 17.5   | 16.9   | 16.3   | 15.6   |
| 95°    | 24.1   | 23.0   | 22.4   | 25.0   | 30.1   | 35.3   | 40.4   | 45.6   | 40.4   | 35.3   | 30.1   |
| 97.5°  | 28.3   | 25.8   | 24.6   | 31.0   | 43.8   | 56.5   | 69.3   | 82.1   | 69.3   | 56.5   | 43.8   |
| 100°   | 32.1   | 29.4   | 28.1   | 38.8   | 60.1   | 81.5   | 102.8  | 124.2  | 102.8  | 81.5   | 60.1   |
| 102.5° | 126.5  | 154.9  | 169.1  | 169.3  | 169.6  | 169.9  | 170.2  | 170.5  | 170.2  | 169.9  | 169.6  |
| 105°   | 170.5  | 213.0  | 234.3  | 232.0  | 227.3  | 222.6  | 218.0  | 213.3  | 218.0  | 222.6  | 227.3  |
| 107.5° | 201.8  | 254.3  | 280.6  | 278.7  | 274.8  | 270.9  | 267.0  | 263.1  | 267.0  | 270.9  | 274.8  |
| 110°   | 257.9  | 303.0  | 325.5  | 323.9  | 320.6  | 317.3  | 314.1  | 310.8  | 314.1  | 317.3  | 320.6  |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 150°  | 155°  | 157.5° | 160°  | 165°  | 170°  | 175°  | 180°  | 185°  | 190°  | 195°  |
|--------|-------|-------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 364.3 | 367.0 | 368.3  | 366.9 | 364.1 | 361.3 | 358.5 | 355.7 | 358.5 | 361.3 | 364.1 |
| 115°   | 421.1 | 417.2 | 415.3  | 414.0 | 411.3 | 408.7 | 406.0 | 403.4 | 406.0 | 408.7 | 411.3 |
| 117.5° | 462.8 | 460.1 | 458.8  | 457.2 | 454.1 | 451.0 | 447.9 | 444.8 | 447.9 | 451.0 | 454.1 |
| 120°   | 505.8 | 503.0 | 501.6  | 500.4 | 498.1 | 495.8 | 493.4 | 491.1 | 493.4 | 495.8 | 498.1 |
| 122.5° | 546.3 | 543.2 | 541.6  | 540.4 | 537.9 | 535.4 | 532.9 | 530.4 | 532.9 | 535.4 | 537.9 |
| 125°   | 583.9 | 581.0 | 579.5  | 578.5 | 576.4 | 574.4 | 572.3 | 570.3 | 572.3 | 574.4 | 576.4 |
| 127.5° | 620.1 | 617.8 | 616.6  | 615.5 | 613.3 | 611.2 | 609.0 | 606.8 | 609.0 | 611.2 | 613.3 |
| 130°   | 655.0 | 653.3 | 652.4  | 651.2 | 648.7 | 646.2 | 643.7 | 641.2 | 643.7 | 646.2 | 648.7 |
| 132.5° | 688.0 | 686.3 | 685.4  | 684.4 | 682.4 | 680.3 | 678.3 | 676.3 | 678.3 | 680.3 | 682.4 |
| 135°   | 719.1 | 717.7 | 717.0  | 715.7 | 713.2 | 710.7 | 708.2 | 705.7 | 708.2 | 710.7 | 713.2 |
| 137.5° | 747.3 | 745.8 | 745.0  | 744.1 | 742.2 | 740.3 | 738.5 | 736.6 | 738.5 | 740.3 | 742.2 |
| 140°   | 775.0 | 773.3 | 772.4  | 771.8 | 770.5 | 769.3 | 768.0 | 766.8 | 768.0 | 769.3 | 770.5 |
| 142.5° | 800.0 | 797.9 | 796.9  | 796.4 | 795.3 | 794.2 | 793.1 | 792.0 | 793.1 | 794.2 | 795.3 |
| 145°   | 822.0 | 819.3 | 818.0  | 818.1 | 818.2 | 818.4 | 818.5 | 818.7 | 818.5 | 818.4 | 818.2 |
| 147.5° | 843.7 | 841.0 | 839.7  | 839.9 | 840.4 | 840.9 | 841.3 | 841.8 | 841.3 | 840.9 | 840.4 |
| 150°   | 863.1 | 860.6 | 859.4  | 859.9 | 861.0 | 862.1 | 863.2 | 864.3 | 863.2 | 862.1 | 861.0 |
| 152.5° | 881.1 | 878.8 | 877.6  | 878.2 | 879.5 | 880.7 | 882.0 | 883.2 | 882.0 | 880.7 | 879.5 |
| 155°   | 898.0 | 896.1 | 895.2  | 895.9 | 897.3 | 898.7 | 900.1 | 901.5 | 900.1 | 898.7 | 897.3 |
| 157.5° | 912.7 | 911.3 | 910.6  | 911.2 | 912.5 | 913.7 | 915.0 | 916.2 | 915.0 | 913.7 | 912.5 |
| 160°   | 926.0 | 925.1 | 924.6  | 925.1 | 926.0 | 926.9 | 927.9 | 928.8 | 927.9 | 926.9 | 926.0 |
| 162.5° | 937.0 | 936.2 | 935.8  | 936.3 | 937.2 | 938.2 | 939.1 | 940.1 | 939.1 | 938.2 | 937.2 |
| 165°   | 946.4 | 945.9 | 945.7  | 946.2 | 947.1 | 948.0 | 949.0 | 949.9 | 949.0 | 948.0 | 947.1 |
| 167.5° | 954.1 | 953.6 | 953.4  | 953.9 | 954.8 | 955.7 | 956.7 | 957.6 | 956.7 | 955.7 | 954.8 |
| 170°   | 960.2 | 959.9 | 959.7  | 960.2 | 961.1 | 962.0 | 963.0 | 963.9 | 963.0 | 962.0 | 961.1 |
| 172.5° | 964.4 | 964.1 | 963.9  | 964.4 | 965.3 | 966.2 | 967.2 | 968.1 | 967.2 | 966.2 | 965.3 |
| 175°   | 967.2 | 966.9 | 966.7  | 967.2 | 968.3 | 969.4 | 970.5 | 971.6 | 970.5 | 969.4 | 968.3 |
| 177.5° | 968.3 | 968.2 | 968.1  | 968.6 | 969.7 | 970.8 | 971.9 | 973.0 | 971.9 | 970.8 | 969.7 |
| 180°   | 969.5 | 969.5 | 969.5  | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 200°   | 202.5° | 205°   | 210°   | 215°   | 220°   | 225°   | 230°   | 235°   | 240°   | 245°   |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 |
| 2.5°   | 1884.9 | 1886.2 | 1890.2 | 1878.3 | 1859.8 | 1851.8 | 1828.0 | 1824.0 | 1820.0 | 1820.0 | 1824.0 |
| 5°     | 1842.5 | 1837.2 | 1838.6 | 1816.0 | 1789.5 | 1773.7 | 1740.5 | 1745.8 | 1728.6 | 1718.0 | 1720.7 |
| 7.5°   | 1796.2 | 1781.6 | 1780.3 | 1751.1 | 1718.0 | 1688.9 | 1654.4 | 1646.5 | 1630.6 | 1612.0 | 1604.1 |
| 10°    | 1737.9 | 1727.3 | 1707.4 | 1674.3 | 1631.9 | 1608.1 | 1561.7 | 1533.9 | 1529.9 | 1502.1 | 1491.5 |
| 12.5°  | 1678.3 | 1659.7 | 1639.9 | 1593.5 | 1545.8 | 1507.4 | 1473.0 | 1442.5 | 1421.3 | 1397.5 | 1381.6 |
| 15°    | 1609.4 | 1586.9 | 1564.4 | 1515.4 | 1459.7 | 1421.3 | 1369.6 | 1324.6 | 1262.4 | 1213.3 | 1185.5 |
| 17.5°  | 1533.9 | 1508.7 | 1478.3 | 1424.0 | 1369.6 | 1316.7 | 1221.3 | 1168.3 | 1124.6 | 1095.5 | 1078.2 |
| 20°    | 1455.7 | 1427.9 | 1397.5 | 1343.2 | 1249.1 | 1156.4 | 1103.4 | 1062.3 | 1035.8 | 1006.7 | 985.5  |
| 22.5°  | 1373.6 | 1344.5 | 1311.4 | 1226.6 | 1127.2 | 1062.3 | 1021.3 | 982.9  | 944.4  | 928.6  | 918.0  |
| 25°    | 1296.8 | 1270.3 | 1227.9 | 1112.7 | 1034.5 | 974.9  | 928.6  | 903.4  | 883.5  | 862.3  | 842.5  |
| 27.5°  | 1217.3 | 1168.3 | 1108.7 | 1012.0 | 963.0  | 902.1  | 868.9  | 850.4  | 816.0  | 801.4  | 792.1  |
| 30°    | 1121.9 | 1067.6 | 1010.7 | 941.8  | 884.8  | 842.5  | 812.0  | 781.5  | 761.7  | 747.1  | 731.2  |
| 32.5°  | 1025.2 | 973.6  | 937.8  | 866.3  | 823.9  | 780.2  | 751.1  | 732.5  | 703.4  | 694.1  | 687.5  |
| 35°    | 941.8  | 898.1  | 866.3  | 808.0  | 768.3  | 728.5  | 707.3  | 679.5  | 661.0  | 643.8  | 633.2  |
| 37.5°  | 859.7  | 835.8  | 802.7  | 753.7  | 711.3  | 679.5  | 650.4  | 641.1  | 615.9  | 606.7  | 596.1  |
| 40°    | 802.7  | 766.9  | 739.1  | 696.7  | 661.0  | 626.5  | 608.0  | 586.8  | 569.6  | 555.0  | 551.0  |
| 42.5°  | 733.8  | 707.3  | 691.4  | 645.1  | 608.0  | 588.1  | 565.6  | 541.8  | 528.5  | 516.6  | 502.0  |
| 45°    | 682.2  | 658.3  | 635.8  | 598.7  | 565.6  | 540.4  | 520.6  | 504.7  | 482.2  | 476.9  | 454.3  |
| 47.5°  | 627.9  | 604.0  | 586.8  | 549.7  | 519.2  | 495.4  | 480.8  | 459.6  | 441.1  | 429.2  | 418.6  |
| 50°    | 573.6  | 553.7  | 537.8  | 506.0  | 479.5  | 454.3  | 434.5  | 413.3  | 405.3  | 385.5  | 378.8  |
| 52.5°  | 521.9  | 508.7  | 491.4  | 461.0  | 434.5  | 413.3  | 392.1  | 374.9  | 362.9  | 352.3  | 344.4  |
| 55°    | 478.2  | 457.0  | 449.0  | 415.9  | 393.4  | 370.9  | 352.3  | 341.7  | 327.2  | 320.6  | 313.9  |
| 57.5°  | 429.2  | 417.3  | 404.0  | 378.8  | 353.7  | 332.5  | 319.2  | 303.3  | 295.4  | 287.4  | 282.1  |
| 60°    | 386.8  | 369.6  | 359.0  | 337.8  | 315.3  | 295.4  | 283.5  | 271.5  | 260.9  | 254.3  | 243.7  |
| 62.5°  | 337.8  | 324.5  | 317.9  | 295.4  | 276.8  | 258.3  | 247.7  | 235.8  | 227.8  | 215.9  | 202.7  |
| 65°    | 295.4  | 284.8  | 276.8  | 258.3  | 241.1  | 223.9  | 213.3  | 198.7  | 188.1  | 181.5  | 180.1  |
| 67.5°  | 258.3  | 250.4  | 238.4  | 221.2  | 204.0  | 190.7  | 178.8  | 166.9  | 165.6  | 162.9  | 162.9  |
| 70°    | 217.2  | 209.3  | 202.7  | 184.1  | 169.6  | 155.0  | 152.3  | 148.4  | 144.4  | 143.1  | 140.4  |
| 72.5°  | 181.5  | 174.8  | 166.9  | 151.0  | 136.4  | 132.5  | 129.8  | 127.2  | 123.2  | 121.9  | 120.5  |
| 75°    | 147.0  | 137.8  | 132.5  | 117.9  | 113.9  | 111.3  | 108.6  | 104.6  | 102.0  | 100.7  | 98.0   |
| 77.5°  | 112.6  | 103.3  | 103.3  | 95.4   | 92.7   | 88.7   | 86.1   | 83.5   | 82.1   | 79.5   | 79.5   |
| 80°    | 79.5   | 79.5   | 76.8   | 72.9   | 68.9   | 67.6   | 63.6   | 62.3   | 60.9   | 62.3   | 59.6   |
| 82.5°  | 58.3   | 53.0   | 53.0   | 50.3   | 47.7   | 46.4   | 43.7   | 43.7   | 42.4   | 42.4   | 42.4   |
| 85°    | 33.1   | 33.1   | 31.8   | 29.1   | 27.8   | 27.8   | 26.5   | 26.5   | 25.2   | 25.2   | 23.8   |
| 87.5°  | 13.2   | 11.9   | 13.2   | 11.9   | 11.9   | 10.6   | 10.6   | 10.6   | 9.3    | 10.6   | 9.3    |
| 90°    | 7.5    | 8.4    | 9.0    | 10.3   | 11.5   | 12.8   | 14.0   | 14.8   | 15.6   | 16.3   | 17.1   |
| 92.5°  | 15.0   | 14.7   | 14.9   | 15.4   | 15.9   | 16.3   | 16.8   | 17.1   | 17.4   | 17.7   | 18.0   |
| 95°    | 25.0   | 22.4   | 23.0   | 24.1   | 25.2   | 26.3   | 27.4   | 28.2   | 29.0   | 29.7   | 30.5   |
| 97.5°  | 31.0   | 24.6   | 25.8   | 28.3   | 30.8   | 33.3   | 35.8   | 36.3   | 36.7   | 37.2   | 37.7   |
| 100°   | 38.8   | 28.1   | 29.4   | 32.1   | 34.7   | 37.4   | 40.0   | 41.2   | 42.5   | 43.7   | 45.0   |
| 102.5° | 169.3  | 169.1  | 154.9  | 126.5  | 98.2   | 69.8   | 41.4   | 43.1   | 44.8   | 46.5   | 48.2   |
| 105°   | 232.0  | 234.3  | 213.0  | 170.5  | 127.9  | 85.4   | 42.8   | 44.5   | 46.2   | 47.9   | 49.6   |
| 107.5° | 278.7  | 280.6  | 254.3  | 201.8  | 149.3  | 96.7   | 44.2   | 45.9   | 47.6   | 49.3   | 51.0   |
| 110°   | 323.9  | 325.5  | 303.0  | 257.9  | 212.9  | 167.8  | 122.8  | 107.2  | 91.6   | 76.0   | 60.4   |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 200°  | 202.5° | 205°  | 210°  | 215°  | 220°  | 225°  | 230°  | 235°  | 240°  | 245°  |
|--------|-------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 366.9 | 368.3  | 367.0 | 364.3 | 361.7 | 359.0 | 356.4 | 289.2 | 222.0 | 154.8 | 87.6  |
| 115°   | 414.0 | 415.3  | 417.2 | 421.1 | 425.0 | 428.9 | 432.8 | 360.6 | 288.4 | 216.3 | 144.1 |
| 117.5° | 457.2 | 458.8  | 460.1 | 462.8 | 465.4 | 468.1 | 470.7 | 448.4 | 426.1 | 403.8 | 381.5 |
| 120°   | 500.4 | 501.6  | 503.0 | 505.8 | 508.6 | 511.4 | 514.2 | 516.1 | 517.9 | 519.8 | 521.7 |
| 122.5° | 540.4 | 541.6  | 543.2 | 546.3 | 549.4 | 552.5 | 555.6 | 556.5 | 557.5 | 558.4 | 559.3 |
| 125°   | 578.5 | 579.5  | 581.0 | 583.9 | 586.9 | 589.8 | 592.8 | 593.9 | 595.0 | 596.1 | 597.2 |
| 127.5° | 615.5 | 616.6  | 617.8 | 620.1 | 622.5 | 624.8 | 627.2 | 628.8 | 630.3 | 631.9 | 633.4 |
| 130°   | 651.2 | 652.4  | 653.3 | 655.0 | 656.7 | 658.4 | 660.1 | 661.8 | 663.6 | 665.3 | 667.0 |
| 132.5° | 684.4 | 685.4  | 686.3 | 688.0 | 689.7 | 691.4 | 693.1 | 694.5 | 695.9 | 697.3 | 698.7 |
| 135°   | 715.7 | 717.0  | 717.7 | 719.1 | 720.5 | 721.9 | 723.3 | 724.9 | 726.4 | 728.0 | 729.5 |
| 137.5° | 744.1 | 745.0  | 745.8 | 747.3 | 748.9 | 750.4 | 752.0 | 753.6 | 755.2 | 756.7 | 758.3 |
| 140°   | 771.8 | 772.4  | 773.3 | 775.0 | 776.7 | 778.4 | 780.1 | 781.5 | 782.9 | 784.3 | 785.7 |
| 142.5° | 796.4 | 796.9  | 797.9 | 800.0 | 802.0 | 804.1 | 806.1 | 807.3 | 808.6 | 809.8 | 811.1 |
| 145°   | 818.1 | 818.0  | 819.3 | 822.0 | 824.6 | 827.3 | 829.9 | 831.0 | 832.1 | 833.2 | 834.3 |
| 147.5° | 839.9 | 839.7  | 841.0 | 843.7 | 846.4 | 849.0 | 851.7 | 852.5 | 853.3 | 854.0 | 854.8 |
| 150°   | 859.9 | 859.4  | 860.6 | 863.1 | 865.6 | 868.1 | 870.6 | 871.5 | 872.5 | 873.4 | 874.3 |
| 152.5° | 878.2 | 877.6  | 878.8 | 881.1 | 883.4 | 885.8 | 888.1 | 889.1 | 890.0 | 891.0 | 891.9 |
| 155°   | 895.9 | 895.2  | 896.1 | 898.0 | 899.9 | 901.7 | 903.6 | 904.5 | 905.5 | 906.4 | 907.3 |
| 157.5° | 911.2 | 910.6  | 911.3 | 912.7 | 914.1 | 915.5 | 916.9 | 918.0 | 919.1 | 920.2 | 921.3 |
| 160°   | 925.1 | 924.6  | 925.1 | 926.0 | 926.9 | 927.9 | 928.8 | 929.7 | 930.7 | 931.6 | 932.5 |
| 162.5° | 936.3 | 935.8  | 936.2 | 937.0 | 937.8 | 938.6 | 939.4 | 940.5 | 941.6 | 942.7 | 943.8 |
| 165°   | 946.2 | 945.7  | 945.9 | 946.4 | 946.9 | 947.3 | 947.8 | 948.9 | 950.0 | 951.1 | 952.2 |
| 167.5° | 953.9 | 953.4  | 953.6 | 954.1 | 954.6 | 955.0 | 955.5 | 956.6 | 957.7 | 958.8 | 959.9 |
| 170°   | 960.2 | 959.7  | 959.9 | 960.2 | 960.5 | 960.8 | 961.1 | 962.2 | 963.3 | 964.4 | 965.5 |
| 172.5° | 964.4 | 963.9  | 964.1 | 964.4 | 964.7 | 965.0 | 965.3 | 966.4 | 967.5 | 968.6 | 969.7 |
| 175°   | 967.2 | 966.7  | 966.9 | 967.2 | 967.5 | 967.8 | 968.1 | 969.2 | 970.3 | 971.4 | 972.5 |
| 177.5° | 968.6 | 968.1  | 968.2 | 968.3 | 968.5 | 968.6 | 968.8 | 969.9 | 971.0 | 972.1 | 973.2 |
| 180°   | 969.5 | 969.5  | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 |



TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 247.5° | 250°   | 255°   | 260°   | 265°   | 270°   | 275°   | 280°   | 285°   | 290°   | 292.5° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 |
| 2.5°   | 1824.0 | 1821.3 | 1813.4 | 1816.0 | 1812.1 | 1812.1 | 1809.4 | 1809.4 | 1809.4 | 1816.0 | 1812.1 |
| 5°     | 1724.6 | 1715.4 | 1706.1 | 1702.1 | 1698.1 | 1694.2 | 1694.2 | 1692.9 | 1704.8 | 1702.1 | 1712.7 |
| 7.5°   | 1601.5 | 1598.8 | 1580.3 | 1580.3 | 1573.6 | 1571.0 | 1577.6 | 1578.9 | 1580.3 | 1582.9 | 1589.5 |
| 10°    | 1491.5 | 1484.9 | 1458.4 | 1461.0 | 1457.1 | 1451.8 | 1455.7 | 1453.1 | 1462.4 | 1465.0 | 1462.4 |
| 12.5°  | 1361.7 | 1349.8 | 1320.6 | 1306.1 | 1290.2 | 1278.2 | 1292.8 | 1282.2 | 1319.3 | 1329.9 | 1359.0 |
| 15°    | 1189.5 | 1167.0 | 1147.1 | 1147.1 | 1132.5 | 1121.9 | 1128.6 | 1140.5 | 1148.4 | 1160.4 | 1165.7 |
| 17.5°  | 1074.3 | 1065.0 | 1049.1 | 1039.8 | 1035.8 | 1031.9 | 1031.9 | 1037.2 | 1054.4 | 1053.1 | 1063.7 |
| 20°    | 976.2  | 970.9  | 963.0  | 951.1  | 947.1  | 944.4  | 944.4  | 944.4  | 956.4  | 967.0  | 973.6  |
| 22.5°  | 908.7  | 904.7  | 899.4  | 883.5  | 875.6  | 872.9  | 879.5  | 883.5  | 892.8  | 900.7  | 907.4  |
| 25°    | 841.1  | 831.9  | 822.6  | 817.3  | 813.3  | 813.3  | 816.0  | 817.3  | 821.3  | 825.2  | 833.2  |
| 27.5°  | 785.5  | 778.9  | 765.6  | 751.1  | 751.1  | 747.1  | 749.7  | 752.4  | 761.7  | 774.9  | 781.5  |
| 30°    | 723.2  | 721.9  | 716.6  | 711.3  | 706.0  | 703.4  | 708.7  | 712.6  | 714.0  | 720.6  | 720.6  |
| 32.5°  | 678.2  | 668.9  | 659.7  | 654.4  | 651.7  | 650.4  | 651.7  | 657.0  | 657.0  | 665.0  | 674.2  |
| 35°    | 633.2  | 627.9  | 618.6  | 609.3  | 606.7  | 600.0  | 605.3  | 610.6  | 619.9  | 623.9  | 627.9  |
| 37.5°  | 584.2  | 577.5  | 573.6  | 570.9  | 565.6  | 566.9  | 563.0  | 570.9  | 578.9  | 577.5  | 580.2  |
| 40°    | 547.1  | 535.1  | 523.2  | 521.9  | 520.6  | 519.2  | 519.2  | 520.6  | 525.9  | 531.2  | 539.1  |
| 42.5°  | 499.4  | 495.4  | 484.8  | 474.2  | 471.6  | 468.9  | 466.3  | 471.6  | 482.2  | 491.4  | 495.4  |
| 45°    | 450.4  | 445.1  | 442.4  | 434.5  | 429.2  | 427.8  | 425.2  | 431.8  | 441.1  | 445.1  | 447.7  |
| 47.5°  | 405.3  | 404.0  | 396.1  | 397.4  | 393.4  | 394.7  | 393.4  | 397.4  | 397.4  | 401.4  | 404.0  |
| 50°    | 374.9  | 370.9  | 366.9  | 364.3  | 360.3  | 360.3  | 359.0  | 360.3  | 365.6  | 370.9  | 369.6  |
| 52.5°  | 344.4  | 337.8  | 336.5  | 335.1  | 332.5  | 335.1  | 331.2  | 332.5  | 337.8  | 340.4  | 339.1  |
| 55°    | 308.6  | 307.3  | 304.7  | 302.0  | 300.7  | 299.4  | 299.4  | 299.4  | 304.7  | 308.6  | 310.0  |
| 57.5°  | 280.8  | 274.2  | 268.9  | 268.9  | 263.6  | 262.3  | 264.9  | 266.2  | 270.2  | 272.9  | 275.5  |
| 60°    | 242.4  | 239.8  | 231.8  | 227.8  | 219.9  | 218.6  | 218.6  | 223.9  | 230.5  | 239.8  | 242.4  |
| 62.5°  | 201.3  | 197.4  | 196.0  | 196.0  | 196.0  | 196.0  | 196.0  | 196.0  | 196.0  | 197.4  | 197.4  |
| 65°    | 178.8  | 180.1  | 178.8  | 177.5  | 178.8  | 178.8  | 177.5  | 177.5  | 177.5  | 178.8  | 180.1  |
| 67.5°  | 160.3  | 159.0  | 160.3  | 159.0  | 157.6  | 157.6  | 156.3  | 157.6  | 159.0  | 160.3  | 160.3  |
| 70°    | 139.1  | 139.1  | 137.8  | 139.1  | 137.8  | 136.4  | 135.1  | 135.1  | 137.8  | 139.1  | 139.1  |
| 72.5°  | 119.2  | 119.2  | 117.9  | 117.9  | 115.2  | 115.2  | 116.6  | 115.2  | 115.2  | 119.2  | 119.2  |
| 75°    | 99.3   | 98.0   | 96.7   | 96.7   | 95.4   | 95.4   | 95.4   | 94.0   | 96.7   | 96.7   | 98.0   |
| 77.5°  | 78.2   | 78.2   | 78.2   | 76.8   | 76.8   | 75.5   | 75.5   | 76.8   | 76.8   | 76.8   | 78.2   |
| 80°    | 59.6   | 59.6   | 59.6   | 58.3   | 57.0   | 57.0   | 57.0   | 57.0   | 57.0   | 58.3   | 57.0   |
| 82.5°  | 41.1   | 41.1   | 41.1   | 41.1   | 41.1   | 39.7   | 39.7   | 39.7   | 41.1   | 41.1   | 39.7   |
| 85°    | 25.2   | 23.8   | 25.2   | 25.2   | 23.8   | 25.2   | 23.8   | 23.8   | 22.5   | 22.5   | 23.8   |
| 87.5°  | 10.6   | 9.3    | 7.9    | 7.9    | 9.3    | 7.9    | 7.9    | 7.9    | 9.3    | 7.9    | 7.9    |
| 90°    | 17.5   | 17.7   | 18.0   | 18.3   | 18.6   | 18.9   | 18.6   | 18.3   | 18.0   | 17.7   | 17.5   |
| 92.5°  | 18.2   | 18.3   | 18.4   | 18.6   | 18.7   | 18.9   | 18.7   | 18.6   | 18.4   | 18.3   | 18.2   |
| 95°    | 30.9   | 30.8   | 30.7   | 30.5   | 30.4   | 30.2   | 30.4   | 30.5   | 30.7   | 30.8   | 30.9   |
| 97.5°  | 37.9   | 38.0   | 38.1   | 38.3   | 38.4   | 38.6   | 38.4   | 38.3   | 38.1   | 38.0   | 37.9   |
| 100°   | 45.6   | 45.8   | 46.1   | 46.4   | 46.7   | 47.0   | 46.7   | 46.4   | 46.1   | 45.8   | 45.6   |
| 102.5° | 49.1   | 49.3   | 49.8   | 50.3   | 50.7   | 51.2   | 50.7   | 50.3   | 49.8   | 49.3   | 49.1   |
| 105°   | 50.5   | 50.8   | 51.4   | 52.1   | 52.7   | 53.3   | 52.7   | 52.1   | 51.4   | 50.8   | 50.5   |
| 107.5° | 51.9   | 52.2   | 52.8   | 53.5   | 54.1   | 54.7   | 54.1   | 53.5   | 52.8   | 52.2   | 51.9   |
| 110°   | 52.6   | 52.9   | 53.5   | 54.2   | 54.8   | 55.4   | 54.8   | 54.2   | 53.5   | 52.9   | 52.6   |



TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 247.5° | 250°  | 255°  | 260°  | 265°  | 270°  | 275°  | 280°  | 285°  | 290°  | 292.5° |
|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 112.5° | 54.0   | 54.2  | 54.7  | 55.2  | 55.6  | 56.1  | 55.6  | 55.2  | 54.7  | 54.2  | 54.0   |
| 115°   | 108.0  | 102.4 | 91.2  | 79.9  | 68.7  | 57.5  | 68.7  | 79.9  | 91.2  | 102.4 | 108.0  |
| 117.5° | 370.4  | 350.0 | 309.1 | 268.3 | 227.4 | 186.6 | 227.4 | 268.3 | 309.1 | 350.0 | 370.4  |
| 120°   | 522.6  | 512.1 | 491.0 | 470.0 | 448.9 | 427.9 | 448.9 | 470.0 | 491.0 | 512.1 | 522.6  |
| 122.5° | 559.8  | 559.9 | 560.0 | 560.2 | 560.3 | 560.5 | 560.3 | 560.2 | 560.0 | 559.9 | 559.8  |
| 125°   | 597.7  | 597.9 | 598.4 | 598.9 | 599.3 | 599.8 | 599.3 | 598.9 | 598.4 | 597.9 | 597.7  |
| 127.5° | 634.2  | 634.3 | 634.4 | 634.6 | 634.7 | 634.9 | 634.7 | 634.6 | 634.4 | 634.3 | 634.2  |
| 130°   | 667.9  | 667.8 | 667.7 | 667.5 | 667.4 | 667.2 | 667.4 | 667.5 | 667.7 | 667.8 | 667.9  |
| 132.5° | 699.4  | 699.3 | 699.2 | 699.0 | 698.9 | 698.7 | 698.9 | 699.0 | 699.2 | 699.3 | 699.4  |
| 135°   | 730.3  | 730.1 | 729.8 | 729.5 | 729.2 | 728.9 | 729.2 | 729.5 | 729.8 | 730.1 | 730.3  |
| 137.5° | 759.1  | 758.9 | 758.4 | 757.9 | 757.5 | 757.0 | 757.5 | 757.9 | 758.4 | 758.9 | 759.1  |
| 140°   | 786.4  | 786.0 | 785.2 | 784.5 | 783.7 | 782.9 | 783.7 | 784.5 | 785.2 | 786.0 | 786.4  |
| 142.5° | 811.7  | 811.3 | 810.5 | 809.8 | 809.0 | 808.2 | 809.0 | 809.8 | 810.5 | 811.3 | 811.7  |
| 145°   | 834.8  | 834.4 | 833.6 | 832.9 | 832.1 | 831.3 | 832.1 | 832.9 | 833.6 | 834.4 | 834.8  |
| 147.5° | 855.2  | 854.9 | 854.3 | 853.6 | 853.0 | 852.4 | 853.0 | 853.6 | 854.3 | 854.9 | 855.2  |
| 150°   | 874.8  | 874.4 | 873.6 | 872.9 | 872.1 | 871.3 | 872.1 | 872.9 | 873.6 | 874.4 | 874.8  |
| 152.5° | 892.4  | 891.8 | 890.7 | 889.6 | 888.5 | 887.4 | 888.5 | 889.6 | 890.7 | 891.8 | 892.4  |
| 155°   | 907.8  | 907.2 | 905.9 | 904.7 | 903.4 | 902.2 | 903.4 | 904.7 | 905.9 | 907.2 | 907.8  |
| 157.5° | 921.8  | 921.2 | 919.9 | 918.7 | 917.4 | 916.2 | 917.4 | 918.7 | 919.9 | 921.2 | 921.8  |
| 160°   | 933.0  | 932.5 | 931.4 | 930.3 | 929.2 | 928.1 | 929.2 | 930.3 | 931.4 | 932.5 | 933.0  |
| 162.5° | 944.3  | 943.6 | 942.2 | 940.8 | 939.4 | 938.0 | 939.4 | 940.8 | 942.2 | 943.6 | 944.3  |
| 165°   | 952.7  | 952.2 | 951.1 | 950.0 | 948.9 | 947.8 | 948.9 | 950.0 | 951.1 | 952.2 | 952.7  |
| 167.5° | 960.4  | 959.7 | 958.3 | 956.9 | 955.5 | 954.1 | 955.5 | 956.9 | 958.3 | 959.7 | 960.4  |
| 170°   | 966.0  | 965.3 | 963.9 | 962.5 | 961.1 | 959.7 | 961.1 | 962.5 | 963.9 | 965.3 | 966.0  |
| 172.5° | 970.2  | 969.5 | 968.1 | 966.7 | 965.3 | 963.9 | 965.3 | 966.7 | 968.1 | 969.5 | 970.2  |
| 175°   | 973.0  | 972.2 | 970.7 | 969.1 | 967.6 | 966.0 | 967.6 | 969.1 | 970.7 | 972.2 | 973.0  |
| 177.5° | 973.7  | 973.0 | 971.6 | 970.2 | 968.8 | 967.4 | 968.8 | 970.2 | 971.6 | 973.0 | 973.7  |
| 180°   | 969.5  | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5  |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 295°   | 300°   | 305°   | 310°   | 315°   | 320°   | 325°   | 330°   | 335°   | 337.5° | 340°   |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°     | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 | 1906.1 |
| 2.5°   | 1816.0 | 1822.7 | 1820.0 | 1805.4 | 1820.0 | 1824.0 | 1831.9 | 1839.9 | 1845.2 | 1853.1 | 1859.8 |
| 5°     | 1702.1 | 1715.4 | 1723.3 | 1715.4 | 1741.9 | 1745.8 | 1764.4 | 1775.0 | 1790.9 | 1804.1 | 1814.7 |
| 7.5°   | 1594.8 | 1605.4 | 1621.3 | 1624.0 | 1639.9 | 1658.4 | 1684.9 | 1711.4 | 1736.6 | 1749.8 | 1761.7 |
| 10°    | 1479.6 | 1498.1 | 1522.0 | 1516.7 | 1540.5 | 1569.7 | 1597.5 | 1639.9 | 1661.1 | 1684.9 | 1706.1 |
| 12.5°  | 1364.3 | 1376.3 | 1408.1 | 1418.7 | 1453.1 | 1475.6 | 1514.0 | 1540.5 | 1593.5 | 1621.3 | 1639.9 |
| 15°    | 1163.0 | 1212.0 | 1251.8 | 1299.4 | 1344.5 | 1386.9 | 1421.3 | 1469.0 | 1515.4 | 1536.5 | 1567.0 |
| 17.5°  | 1071.6 | 1094.1 | 1118.0 | 1141.8 | 1200.1 | 1275.6 | 1336.5 | 1388.2 | 1427.9 | 1455.7 | 1491.5 |
| 20°    | 976.2  | 998.8  | 1025.2 | 1047.8 | 1083.5 | 1137.8 | 1213.3 | 1302.1 | 1349.8 | 1378.9 | 1413.4 |
| 22.5°  | 908.7  | 929.9  | 947.1  | 967.0  | 994.8  | 1034.5 | 1091.5 | 1201.4 | 1265.0 | 1300.8 | 1331.2 |
| 25°    | 835.8  | 862.3  | 880.9  | 895.4  | 918.0  | 961.7  | 1008.0 | 1070.3 | 1184.2 | 1212.0 | 1254.4 |
| 27.5°  | 785.5  | 793.4  | 814.6  | 837.2  | 859.7  | 883.5  | 931.2  | 984.2  | 1061.0 | 1121.9 | 1173.6 |
| 30°    | 725.9  | 745.8  | 765.6  | 774.9  | 794.8  | 829.2  | 858.3  | 915.3  | 974.9  | 1022.6 | 1084.9 |
| 32.5°  | 680.8  | 692.8  | 706.0  | 728.5  | 747.1  | 770.9  | 800.1  | 847.8  | 898.1  | 928.6  | 976.2  |
| 35°    | 630.5  | 638.5  | 666.3  | 675.6  | 694.1  | 717.9  | 747.1  | 784.2  | 838.5  | 862.3  | 896.8  |
| 37.5°  | 582.8  | 601.4  | 609.3  | 630.5  | 647.7  | 671.6  | 692.8  | 735.2  | 770.9  | 798.7  | 830.5  |
| 40°    | 545.7  | 553.7  | 568.3  | 586.8  | 601.4  | 619.9  | 646.4  | 676.9  | 715.3  | 737.8  | 765.6  |
| 42.5°  | 500.7  | 507.3  | 525.9  | 536.5  | 560.3  | 577.5  | 593.4  | 630.5  | 665.0  | 682.2  | 710.0  |
| 45°    | 451.7  | 467.6  | 479.5  | 500.7  | 513.9  | 535.1  | 555.0  | 581.5  | 613.3  | 633.2  | 649.1  |
| 47.5°  | 409.3  | 425.2  | 437.1  | 457.0  | 478.2  | 487.5  | 508.7  | 536.5  | 565.6  | 581.5  | 604.0  |
| 50°    | 374.9  | 380.2  | 402.7  | 412.0  | 434.5  | 453.0  | 467.6  | 491.4  | 523.2  | 532.5  | 551.0  |
| 52.5°  | 341.7  | 345.7  | 360.3  | 372.2  | 392.1  | 408.0  | 426.5  | 449.0  | 475.5  | 490.1  | 504.7  |
| 55°    | 312.6  | 315.3  | 321.9  | 335.1  | 348.4  | 368.2  | 385.5  | 406.7  | 429.2  | 445.1  | 458.3  |
| 57.5°  | 279.5  | 284.8  | 290.1  | 298.0  | 311.3  | 329.8  | 348.4  | 368.2  | 386.8  | 397.4  | 414.6  |
| 60°    | 241.1  | 249.0  | 258.3  | 267.6  | 276.8  | 290.1  | 311.3  | 329.8  | 347.0  | 356.3  | 369.6  |
| 62.5°  | 200.0  | 215.9  | 223.9  | 234.5  | 242.4  | 254.3  | 270.2  | 291.4  | 303.3  | 315.3  | 325.9  |
| 65°    | 180.1  | 181.5  | 182.8  | 193.4  | 208.0  | 219.9  | 234.5  | 250.4  | 268.9  | 276.8  | 284.8  |
| 67.5°  | 160.3  | 161.6  | 164.3  | 165.6  | 170.9  | 184.1  | 200.0  | 217.2  | 231.8  | 237.1  | 245.1  |
| 70°    | 140.4  | 140.4  | 145.7  | 147.0  | 148.4  | 149.7  | 162.9  | 180.1  | 193.4  | 200.0  | 209.3  |
| 72.5°  | 119.2  | 120.5  | 123.2  | 124.5  | 127.2  | 129.8  | 133.8  | 143.1  | 159.0  | 165.6  | 176.2  |
| 75°    | 98.0   | 99.3   | 100.7  | 102.0  | 106.0  | 107.3  | 111.3  | 116.6  | 123.2  | 131.1  | 137.8  |
| 77.5°  | 78.2   | 78.2   | 79.5   | 82.1   | 84.8   | 86.1   | 90.1   | 92.7   | 95.4   | 99.3   | 104.6  |
| 80°    | 58.3   | 59.6   | 59.6   | 62.3   | 62.3   | 63.6   | 64.9   | 68.9   | 71.5   | 74.2   | 76.8   |
| 82.5°  | 39.7   | 42.4   | 42.4   | 42.4   | 43.7   | 45.0   | 46.4   | 46.4   | 49.0   | 50.3   | 54.3   |
| 85°    | 23.8   | 25.2   | 25.2   | 25.2   | 23.8   | 26.5   | 26.5   | 27.8   | 27.8   | 27.8   | 29.1   |
| 87.5°  | 9.3    | 7.9    | 9.3    | 9.3    | 9.3    | 10.6   | 9.3    | 9.3    | 10.6   | 11.9   | 11.9   |
| 90°    | 17.1   | 16.3   | 15.6   | 14.8   | 14.0   | 12.8   | 11.5   | 10.3   | 9.0    | 8.4    | 7.5    |
| 92.5°  | 18.0   | 17.7   | 17.4   | 17.1   | 16.8   | 16.3   | 15.9   | 15.4   | 14.9   | 14.7   | 15.0   |
| 95°    | 30.5   | 29.7   | 29.0   | 28.2   | 27.4   | 26.3   | 25.2   | 24.1   | 23.0   | 22.4   | 25.0   |
| 97.5°  | 37.7   | 37.2   | 36.7   | 36.3   | 35.8   | 33.3   | 30.8   | 28.3   | 25.8   | 24.6   | 31.0   |
| 100°   | 45.0   | 43.7   | 42.5   | 41.2   | 40.0   | 37.4   | 34.7   | 32.1   | 29.4   | 28.1   | 38.8   |
| 102.5° | 48.2   | 46.5   | 44.8   | 43.1   | 41.4   | 69.8   | 98.2   | 126.5  | 154.9  | 169.1  | 169.3  |
| 105°   | 49.6   | 47.9   | 46.2   | 44.5   | 42.8   | 85.4   | 127.9  | 170.5  | 213.0  | 234.3  | 232.0  |
| 107.5° | 51.0   | 49.3   | 47.6   | 45.9   | 44.2   | 96.7   | 149.3  | 201.8  | 254.3  | 280.6  | 278.7  |
| 110°   | 60.4   | 76.0   | 91.6   | 107.2  | 122.8  | 167.8  | 212.9  | 257.9  | 303.0  | 325.5  | 323.9  |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 295°  | 300°  | 305°  | 310°  | 315°  | 320°  | 325°  | 330°  | 335°  | 337.5° | 340°  |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|-------|
| 112.5° | 87.6  | 154.8 | 222.0 | 289.2 | 356.4 | 359.0 | 361.7 | 364.3 | 367.0 | 368.3  | 366.9 |
| 115°   | 144.1 | 216.3 | 288.4 | 360.6 | 432.8 | 428.9 | 425.0 | 421.1 | 417.2 | 415.3  | 414.0 |
| 117.5° | 381.5 | 403.8 | 426.1 | 448.4 | 470.7 | 468.1 | 465.4 | 462.8 | 460.1 | 458.8  | 457.2 |
| 120°   | 521.7 | 519.8 | 517.9 | 516.1 | 514.2 | 511.4 | 508.6 | 505.8 | 503.0 | 501.6  | 500.4 |
| 122.5° | 559.3 | 558.4 | 557.5 | 556.5 | 555.6 | 552.5 | 549.4 | 546.3 | 543.2 | 541.6  | 540.4 |
| 125°   | 597.2 | 596.1 | 595.0 | 593.9 | 592.8 | 589.8 | 586.9 | 583.9 | 581.0 | 579.5  | 578.5 |
| 127.5° | 633.4 | 631.9 | 630.3 | 628.8 | 627.2 | 624.8 | 622.5 | 620.1 | 617.8 | 616.6  | 615.5 |
| 130°   | 667.0 | 665.3 | 663.6 | 661.8 | 660.1 | 658.4 | 656.7 | 655.0 | 653.3 | 652.4  | 651.2 |
| 132.5° | 698.7 | 697.3 | 695.9 | 694.5 | 693.1 | 691.4 | 689.7 | 688.0 | 686.3 | 685.4  | 684.4 |
| 135°   | 729.5 | 728.0 | 726.4 | 724.9 | 723.3 | 721.9 | 720.5 | 719.1 | 717.7 | 717.0  | 715.7 |
| 137.5° | 758.3 | 756.7 | 755.2 | 753.6 | 752.0 | 750.4 | 748.9 | 747.3 | 745.8 | 745.0  | 744.1 |
| 140°   | 785.7 | 784.3 | 782.9 | 781.5 | 780.1 | 778.4 | 776.7 | 775.0 | 773.3 | 772.4  | 771.8 |
| 142.5° | 811.1 | 809.8 | 808.6 | 807.3 | 806.1 | 804.1 | 802.0 | 800.0 | 797.9 | 796.9  | 796.4 |
| 145°   | 834.3 | 833.2 | 832.1 | 831.0 | 829.9 | 827.3 | 824.6 | 822.0 | 819.3 | 818.0  | 818.1 |
| 147.5° | 854.8 | 854.0 | 853.3 | 852.5 | 851.7 | 849.0 | 846.4 | 843.7 | 841.0 | 839.7  | 839.9 |
| 150°   | 874.3 | 873.4 | 872.5 | 871.5 | 870.6 | 868.1 | 865.6 | 863.1 | 860.6 | 859.4  | 859.9 |
| 152.5° | 891.9 | 891.0 | 890.0 | 889.1 | 888.1 | 885.8 | 883.4 | 881.1 | 878.8 | 877.6  | 878.2 |
| 155°   | 907.3 | 906.4 | 905.5 | 904.5 | 903.6 | 901.7 | 899.9 | 898.0 | 896.1 | 895.2  | 895.9 |
| 157.5° | 921.3 | 920.2 | 919.1 | 918.0 | 916.9 | 915.5 | 914.1 | 912.7 | 911.3 | 910.6  | 911.2 |
| 160°   | 932.5 | 931.6 | 930.7 | 929.7 | 928.8 | 927.9 | 926.9 | 926.0 | 925.1 | 924.6  | 925.1 |
| 162.5° | 943.8 | 942.7 | 941.6 | 940.5 | 939.4 | 938.6 | 937.8 | 937.0 | 936.2 | 935.8  | 936.3 |
| 165°   | 952.2 | 951.1 | 950.0 | 948.9 | 947.8 | 947.3 | 946.9 | 946.4 | 945.9 | 945.7  | 946.2 |
| 167.5° | 959.9 | 958.8 | 957.7 | 956.6 | 955.5 | 955.0 | 954.6 | 954.1 | 953.6 | 953.4  | 953.9 |
| 170°   | 965.5 | 964.4 | 963.3 | 962.2 | 961.1 | 960.8 | 960.5 | 960.2 | 959.9 | 959.7  | 960.2 |
| 172.5° | 969.7 | 968.6 | 967.5 | 966.4 | 965.3 | 965.0 | 964.7 | 964.4 | 964.1 | 963.9  | 964.4 |
| 175°   | 972.5 | 971.4 | 970.3 | 969.2 | 968.1 | 967.8 | 967.5 | 967.2 | 966.9 | 966.7  | 967.2 |
| 177.5° | 973.2 | 972.1 | 971.0 | 969.9 | 968.8 | 968.6 | 968.5 | 968.3 | 968.2 | 968.1  | 968.6 |
| 180°   | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5 | 969.5  | 969.5 |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 345°   | 350°   | 355°   | 360°   |
|--------|--------|--------|--------|--------|
| 0°     | 1906.1 | 1906.1 | 1906.1 | 1906.1 |
| 2.5°   | 1871.7 | 1867.7 | 1891.5 | 1918.0 |
| 5°     | 1833.3 | 1839.9 | 1870.3 | 1907.4 |
| 7.5°   | 1793.5 | 1808.1 | 1843.9 | 1892.9 |
| 10°    | 1737.9 | 1764.4 | 1818.7 | 1869.0 |
| 12.5°  | 1683.6 | 1719.3 | 1771.0 | 1830.6 |
| 15°    | 1622.6 | 1662.4 | 1726.0 | 1797.5 |
| 17.5°  | 1555.1 | 1600.1 | 1674.3 | 1752.5 |
| 20°    | 1483.6 | 1543.2 | 1621.3 | 1706.1 |
| 22.5°  | 1404.1 | 1475.6 | 1556.4 | 1650.5 |
| 25°    | 1327.3 | 1405.4 | 1486.2 | 1594.8 |
| 27.5°  | 1251.8 | 1328.6 | 1418.7 | 1528.6 |
| 30°    | 1176.3 | 1246.5 | 1343.2 | 1461.0 |
| 32.5°  | 1095.5 | 1168.3 | 1270.3 | 1390.8 |
| 35°    | 1021.3 | 1094.1 | 1189.5 | 1308.7 |
| 37.5°  | 941.8  | 1019.9 | 1111.3 | 1234.5 |
| 40°    | 849.1  | 940.5  | 1029.2 | 1147.1 |
| 42.5°  | 772.2  | 868.9  | 955.0  | 1066.3 |
| 45°    | 711.3  | 802.7  | 874.2  | 982.9  |
| 47.5°  | 654.4  | 728.5  | 801.4  | 902.1  |
| 50°    | 600.0  | 657.0  | 732.5  | 822.6  |
| 52.5°  | 544.4  | 593.4  | 658.3  | 743.1  |
| 55°    | 494.1  | 540.4  | 598.7  | 663.6  |
| 57.5°  | 447.7  | 480.8  | 539.1  | 597.4  |
| 60°    | 396.1  | 430.5  | 475.5  | 524.5  |
| 62.5°  | 352.3  | 378.8  | 421.2  | 462.3  |
| 65°    | 306.0  | 331.2  | 362.9  | 401.4  |
| 67.5°  | 263.6  | 286.1  | 311.3  | 341.7  |
| 70°    | 225.2  | 242.4  | 260.9  | 287.4  |
| 72.5°  | 184.1  | 202.7  | 219.9  | 241.1  |
| 75°    | 151.0  | 159.0  | 173.5  | 188.1  |
| 77.5°  | 116.6  | 127.2  | 135.1  | 147.0  |
| 80°    | 83.5   | 92.7   | 95.4   | 104.6  |
| 82.5°  | 55.6   | 60.9   | 66.2   | 68.9   |
| 85°    | 31.8   | 34.4   | 39.7   | 41.1   |
| 87.5°  | 11.9   | 13.2   | 15.9   | 18.5   |
| 90°    | 5.8    | 4.1    | 2.4    | 0.7    |
| 92.5°  | 15.6   | 16.3   | 16.9   | 17.5   |
| 95°    | 30.1   | 35.3   | 40.4   | 45.6   |
| 97.5°  | 43.8   | 56.5   | 69.3   | 82.1   |
| 100°   | 60.1   | 81.5   | 102.8  | 124.2  |
| 102.5° | 169.6  | 169.9  | 170.2  | 170.5  |
| 105°   | 227.3  | 222.6  | 218.0  | 213.3  |
| 107.5° | 274.8  | 270.9  | 267.0  | 263.1  |
| 110°   | 320.6  | 317.3  | 314.1  | 310.8  |

TEST NUMBER: P1010346

CATALOG NUMBER: S122RDIP-B865D725UB35-4F0-XX-W2A-A

**CANDELA DISTRIBUTION (continued):**

|        | 345°  | 350°  | 355°  | 360°  |
|--------|-------|-------|-------|-------|
| 112.5° | 364.1 | 361.3 | 358.5 | 355.7 |
| 115°   | 411.3 | 408.7 | 406.0 | 403.4 |
| 117.5° | 454.1 | 451.0 | 447.9 | 444.8 |
| 120°   | 498.1 | 495.8 | 493.4 | 491.1 |
| 122.5° | 537.9 | 535.4 | 532.9 | 530.4 |
| 125°   | 576.4 | 574.4 | 572.3 | 570.3 |
| 127.5° | 613.3 | 611.2 | 609.0 | 606.8 |
| 130°   | 648.7 | 646.2 | 643.7 | 641.2 |
| 132.5° | 682.4 | 680.3 | 678.3 | 676.3 |
| 135°   | 713.2 | 710.7 | 708.2 | 705.7 |
| 137.5° | 742.2 | 740.3 | 738.5 | 736.6 |
| 140°   | 770.5 | 769.3 | 768.0 | 766.8 |
| 142.5° | 795.3 | 794.2 | 793.1 | 792.0 |
| 145°   | 818.2 | 818.4 | 818.5 | 818.7 |
| 147.5° | 840.4 | 840.9 | 841.3 | 841.8 |
| 150°   | 861.0 | 862.1 | 863.2 | 864.3 |
| 152.5° | 879.5 | 880.7 | 882.0 | 883.2 |
| 155°   | 897.3 | 898.7 | 900.1 | 901.5 |
| 157.5° | 912.5 | 913.7 | 915.0 | 916.2 |
| 160°   | 926.0 | 926.9 | 927.9 | 928.8 |
| 162.5° | 937.2 | 938.2 | 939.1 | 940.1 |
| 165°   | 947.1 | 948.0 | 949.0 | 949.9 |
| 167.5° | 954.8 | 955.7 | 956.7 | 957.6 |
| 170°   | 961.1 | 962.0 | 963.0 | 963.9 |
| 172.5° | 965.3 | 966.2 | 967.2 | 968.1 |
| 175°   | 968.3 | 969.4 | 970.5 | 971.6 |
| 177.5° | 969.7 | 970.8 | 971.9 | 973.0 |
| 180°   | 969.5 | 969.5 | 969.5 | 969.5 |

(END OF REPORT)