

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1011329

Luminaire Tested: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1011329
REPORT IS A COMBINATION OF REPORTS P989440 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-B1165D365UB27-4F0-XX-W2A-A1
Description: Define 3 Direct/Indirect Pendant with 2700K BioUP LEDs {m-DER=0.473} {m-EER=0.52}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6109.0 lumens
Efficiency: N/A
Efficacy: 86.5 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.37 / 1.5
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 70.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

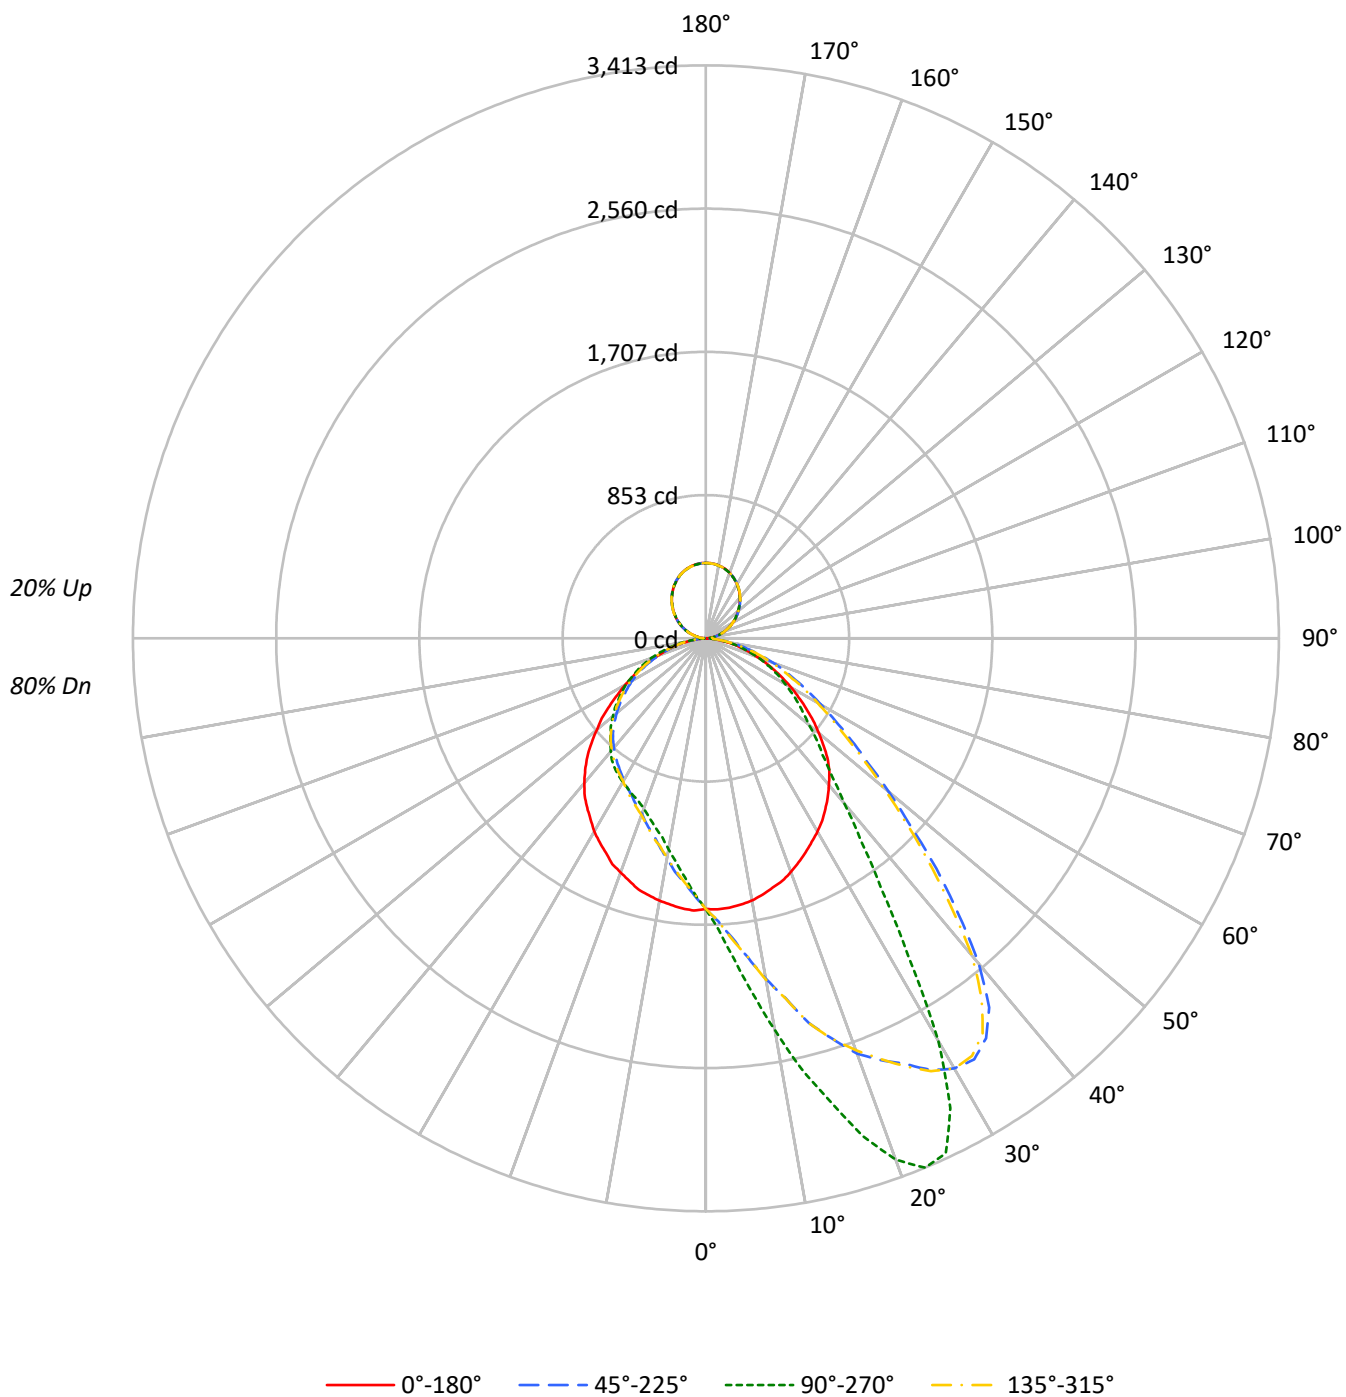



TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	114	114	114	114	109	109	109	109	100	100	100	91	91	91	83	83	83	80			
1	105	101	97	93	100	96	93	90	88	86	83	81	79	77	74	73	71	68			
2	96	88	82	77	91	85	79	74	78	74	70	72	68	65	66	63	61	58			
3	88	78	71	65	84	75	68	63	69	64	59	64	59	56	59	55	52	49			
4	81	69	61	55	77	67	59	54	62	56	51	57	52	48	53	49	45	43			
5	74	62	54	48	71	60	52	46	56	49	44	52	46	42	48	43	40	37			
6	69	56	48	42	65	54	46	41	50	44	39	47	41	37	43	39	35	33			
7	64	51	43	37	61	49	41	36	46	39	34	43	37	33	40	35	31	29			
8	59	46	38	33	56	45	37	32	42	35	31	39	34	29	37	32	28	26			
9	55	43	35	29	53	41	34	29	39	32	28	36	31	27	34	29	25	23			
10	52	39	32	27	49	38	31	26	36	29	25	33	28	24	31	27	23	21			

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	17350	17350	17350	17350
5°	17361	19991	17412	14920
10°	17252	24191	17269	13029
15°	17013	28690	17151	11728
20°	16808	33032	16843	10792
25°	16503	33864	16540	10303
30°	16286	27978	16286	9983
35°	16016	18711	15916	9701
40°	15692	13507	15498	9267
45°	15286	10699	14845	8729
50°	14300	9087	13791	8201
55°	13216	7984	12678	7612
60°	12119	6952	11473	6992
65°	10912	5953	10383	6167
70°	9659	4942	9014	5198
75°	8258	3727	7726	4012
80°	6531	2488	6021	2636
85°	4505	1141	3602	1040

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 27982 cd/sqm

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.5	2.6
10°-20°	509.2	8.3
20°-30°	856.7	14.0
30°-40°	968.2	15.8
40°-50°	867.2	14.2
50°-60°	700.0	11.5
60°-70°	487.8	8.0
70°-80°	256.0	4.2
80°-90°	62.3	1.0
90°-100°	28.9	0.5
100°-110°	87.4	1.4
110°-120°	148.8	2.4
120°-130°	195.8	3.2
130°-140°	220.0	3.6
140°-150°	216.3	3.5
150°-160°	182.1	3.0
160°-170°	121.2	2.0
170°-180°	42.5	0.7
0°-30°	1524.4	25.0
0°-40°	2492.6	40.8
0°-60°	4059.8	66.5
0°-90°	4866.0	79.7
90°-120°	265.1	4.3
90°-150°	897.2	14.7
90°-180°	1243.0	20.3
0°-180°	6109.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1612	1612	1612	1612	1612	
5°	1610	1915	1615	1429	1610	153
15°	1537	2850	1549	1165	1537	434
25°	1406	3383	1409	1029	1406	648
35°	1240	1823	1232	945	1240	776
45°	1029	984	1000	803	1029	787
55°	729	668	700	637	729	653
65°	451	434	430	450	451	450
75°	217	223	203	240	217	233
85°	47	52	38	47	47	54
90°	0	11	0	11	0	5
95°	21	28	21	28	21	23
105°	79	84	79	84	79	85
115°	150	150	150	150	150	148
125°	219	217	219	217	219	195
135°	284	284	284	284	284	219
145°	345	345	345	345	345	216
155°	395	394	395	394	395	182
165°	430	429	430	429	430	121
175°	448	446	448	446	448	43
180°	449	449	449	449	449	

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9
2.5°	1616.6	1629.1	1635.3	1644.7	1654.1	1668.1	1672.8	1680.6	1677.5	1683.8	1686.9
5°	1610.3	1632.2	1651.0	1674.4	1696.3	1711.9	1727.5	1752.5	1771.2	1774.3	1788.4
7.5°	1599.4	1630.7	1663.5	1696.3	1738.4	1763.4	1791.5	1825.9	1854.0	1899.3	1916.5
10°	1585.4	1629.1	1675.9	1721.2	1779.0	1818.1	1852.4	1910.2	1968.0	2014.9	2058.6
12.5°	1563.5	1618.2	1679.1	1746.2	1821.2	1866.5	1913.4	1989.9	2077.4	2149.2	2196.1
15°	1536.9	1605.7	1683.8	1755.6	1838.4	1922.7	1972.7	2058.6	2183.6	2250.7	2371.0
17.5°	1515.1	1585.4	1663.5	1775.9	1888.4	1972.7	2008.6	2166.4	2252.3	2364.8	2500.6
20°	1480.7	1569.7	1669.7	1782.2	1927.4	1979.0	2052.4	2211.7	2317.9	2464.7	2631.8
22.5°	1444.8	1540.1	1660.3	1777.5	1939.9	1994.6	2094.5	2221.1	2389.7	2535.0	2719.3
25°	1405.7	1508.8	1630.7	1769.7	1929.0	2008.6	2102.4	2258.5	2441.3	2624.0	2794.3
27.5°	1366.7	1479.1	1605.7	1744.7	1899.3	1993.0	2086.7	2249.2	2483.5	2681.8	2898.9
30°	1329.2	1441.7	1568.2	1710.3	1872.8	1963.3	2052.4	2255.4	2516.3	2739.6	2958.3
32.5°	1288.6	1404.2	1536.9	1655.6	1819.6	1916.5	2016.4	2255.4	2536.6	2774.0	2973.9
35°	1240.2	1358.9	1472.9	1591.6	1754.0	1861.8	1974.3	2239.8	2555.3	2784.9	2908.3
37.5°	1193.3	1298.0	1396.4	1511.9	1682.2	1797.8	1927.4	2221.1	2545.9	2738.1	2772.4
40°	1140.2	1244.9	1324.5	1432.3	1611.9	1746.2	1877.4	2196.1	2505.3	2627.2	2527.2
42.5°	1088.7	1171.4	1240.2	1344.8	1540.1	1671.3	1813.4	2150.8	2425.7	2450.7	2225.7
45°	1029.3	1088.7	1149.6	1268.3	1462.0	1596.3	1754.0	2085.2	2297.6	2225.7	1941.5
47.5°	952.8	1005.9	1073.0	1182.4	1379.2	1518.2	1668.1	2000.8	2111.7	1961.8	1651.0
50°	879.4	924.7	987.1	1093.3	1291.7	1427.6	1586.9	1868.1	1922.7	1686.9	1422.9
52.5°	806.0	840.3	901.2	1007.4	1205.8	1337.0	1482.3	1732.2	1700.9	1447.9	1213.6
55°	729.4	759.1	816.9	921.5	1105.8	1230.8	1369.8	1565.1	1483.8	1243.3	1055.9
57.5°	654.4	685.7	745.0	832.5	1005.9	1127.7	1238.6	1391.7	1269.8	1077.7	912.2
60°	587.3	613.8	659.1	745.0	902.8	1001.2	1102.7	1207.4	1105.8	920.0	793.5
62.5°	517.0	542.0	584.2	662.3	798.1	885.6	966.8	1052.7	940.3	804.4	691.9
65°	451.4	471.7	510.8	582.6	693.5	765.3	830.9	890.3	799.7	674.8	590.4
67.5°	392.0	409.2	442.0	506.1	599.8	651.3	704.4	754.4	677.9	577.9	506.1
70°	328.0	342.1	371.7	418.6	493.6	546.7	585.7	623.2	554.5	474.8	426.4
72.5°	271.8	285.8	304.6	353.0	404.5	437.3	479.5	499.8	460.8	395.2	346.7
75°	217.1	228.0	245.2	276.5	324.9	346.7	373.3	388.9	353.0	309.3	279.6
77.5°	170.3	174.9	187.4	209.3	242.1	267.1	287.4	296.8	271.8	243.7	218.7
80°	120.3	126.5	135.9	154.6	179.6	187.4	199.9	210.9	195.2	170.3	154.6
82.5°	79.7	87.5	92.2	100.0	115.6	125.0	128.1	137.4	123.4	114.0	107.8
85°	46.9	50.0	51.5	56.2	64.0	68.7	73.4	75.0	71.8	70.3	64.0
87.5°	23.4	23.4	23.4	26.6	28.1	31.2	32.8	32.8	32.8	31.2	29.7
90°	0.4	1.2	2.0	2.7	3.5	3.9	4.4	5.4	6.5	7.5	8.5
92.5°	10.6	11.1	11.5	12.0	12.5	12.7	12.9	13.4	13.9	14.3	14.8
95°	20.8	21.4	21.9	22.5	23.0	23.3	23.6	24.2	24.9	25.5	26.1
97.5°	34.2	34.6	35.0	35.3	35.7	35.9	36.1	36.6	37.1	37.6	38.1
100°	47.9	48.4	48.8	49.3	49.8	50.0	50.2	50.6	51.0	51.4	51.8
102.5°	63.8	64.0	64.2	64.5	64.7	64.8	65.1	65.6	66.2	66.7	67.3
105°	79.3	79.5	79.6	79.8	79.9	80.0	80.4	81.1	81.8	82.5	83.2
107.5°	97.6	97.7	97.8	97.9	98.0	98.0	98.2	98.5	98.8	99.1	99.4
110°	114.5	114.7	114.8	115.0	115.1	115.2	115.3	115.4	115.6	115.7	115.9

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	132.2	132.3	132.3	132.4	132.5	132.5	132.5	132.5	132.5	132.5	132.5
115°	149.8	150.0	150.2	150.5	150.7	150.8	150.7	150.6	150.4	150.3	150.1
117.5°	167.7	167.8	167.9	168.0	168.1	168.1	168.0	167.9	167.7	167.6	167.4
120°	184.3	184.8	185.2	185.7	186.2	186.4	186.2	185.8	185.5	185.1	184.7
122.5°	201.6	201.9	202.2	202.5	202.8	203.0	202.9	202.8	202.6	202.5	202.3
125°	219.2	219.4	219.7	219.9	220.2	220.3	220.2	220.1	219.9	219.8	219.6
127.5°	235.4	235.9	236.3	236.8	237.3	237.5	237.4	237.3	237.1	237.0	236.8
130°	251.6	252.2	252.8	253.5	254.1	254.4	254.3	254.1	253.8	253.6	253.4
132.5°	267.8	268.4	269.1	269.7	270.4	270.7	270.6	270.4	270.3	270.1	269.9
135°	284.4	284.9	285.3	285.8	286.3	286.5	286.5	286.4	286.3	286.3	286.2
137.5°	299.6	300.0	300.4	300.7	301.1	301.3	301.4	301.7	301.9	302.2	302.4
140°	315.4	315.8	316.2	316.6	317.0	317.2	317.2	317.3	317.4	317.4	317.5
142.5°	329.9	330.3	330.7	331.0	331.4	331.6	331.7	331.8	332.0	332.1	332.3
145°	345.0	345.2	345.3	345.5	345.6	345.7	345.8	346.1	346.3	346.6	346.8
147.5°	358.1	358.4	358.7	359.0	359.3	359.5	359.6	359.8	360.1	360.3	360.5
150°	371.8	372.0	372.1	372.3	372.4	372.5	372.6	372.7	372.9	373.0	373.2
152.5°	383.1	383.3	383.5	383.8	384.0	384.1	384.1	384.2	384.3	384.4	384.5
155°	395.1	395.1	395.1	395.1	395.1	395.1	395.1	395.2	395.3	395.3	395.4
157.5°	405.3	405.2	405.1	405.0	404.9	404.9	404.9	405.0	405.1	405.2	405.3
160°	414.8	414.6	414.5	414.3	414.2	414.1	414.1	414.1	414.1	414.1	414.1
162.5°	423.2	423.0	422.8	422.5	422.3	422.2	422.2	422.3	422.4	422.4	422.5
165°	430.3	430.1	429.8	429.6	429.3	429.2	429.2	429.2	429.2	429.2	429.2
167.5°	436.3	436.0	435.7	435.4	435.1	434.9	434.9	435.0	435.1	435.1	435.2
170°	441.2	440.9	440.6	440.3	440.0	439.8	439.8	439.8	439.8	439.8	439.8
172.5°	445.1	444.8	444.5	444.2	443.9	443.7	443.7	443.7	443.7	443.7	443.7
175°	447.6	447.3	447.0	446.7	446.4	446.2	446.2	446.2	446.2	446.2	446.2
177.5°	449.0	448.7	448.4	448.1	447.8	447.6	447.6	447.6	447.6	447.6	447.6
180°	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9
2.5°	1697.8	1700.9	1711.9	1719.7	1735.3	1733.7	1733.7	1732.2	1727.5	1735.3	1740.0
5°	1816.5	1843.1	1846.2	1880.6	1882.1	1896.2	1905.6	1897.7	1916.5	1914.9	1900.9
7.5°	1963.3	1999.3	2016.4	2049.2	2086.7	2077.4	2113.3	2119.5	2116.4	2132.0	2143.0
10°	2124.2	2186.7	2230.4	2291.3	2307.0	2316.3	2339.8	2360.1	2400.7	2369.4	2389.7
12.5°	2308.5	2353.8	2411.6	2508.5	2556.9	2588.1	2599.0	2613.1	2641.2	2624.0	2625.6
15°	2463.2	2524.1	2622.5	2742.7	2756.8	2795.8	2786.5	2870.8	2911.4	2850.5	2884.9
17.5°	2624.0	2705.3	2822.4	2927.1	2986.4	3013.0	3037.9	3119.2	3116.0	3106.7	3114.5
20°	2727.1	2859.9	3005.1	3144.2	3161.3	3181.6	3248.8	3283.2	3276.9	3303.5	3320.7
22.5°	2872.4	3013.0	3167.6	3259.7	3298.8	3322.2	3375.3	3397.2	3406.6	3412.8	3401.9
25°	2994.2	3144.2	3258.2	3339.4	3362.8	3375.3	3392.5	3398.8	3394.1	3383.1	3392.5
27.5°	3077.0	3197.3	3275.4	3312.8	3300.4	3280.0	3247.2	3225.4	3177.0	3153.5	3181.6
30°	3111.4	3164.5	3187.9	3125.4	3062.9	3013.0	2950.5	2834.9	2744.3	2770.9	2734.9
32.5°	3056.7	3022.3	2909.9	2749.0	2700.6	2619.4	2442.9	2307.0	2311.7	2239.8	2269.5
35°	2895.8	2739.6	2527.2	2283.5	2219.5	2175.8	1982.1	1952.4	1889.9	1822.8	1841.5
37.5°	2611.5	2383.5	2125.8	1946.2	1850.9	1755.6	1646.3	1580.7	1543.2	1515.1	1536.9
40°	2264.8	1986.8	1774.3	1613.5	1532.3	1471.3	1396.4	1330.8	1288.6	1283.9	1291.7
42.5°	1924.3	1690.0	1494.8	1341.7	1315.1	1243.3	1194.9	1143.3	1130.8	1110.5	1121.5
45°	1629.1	1438.5	1277.7	1152.7	1121.5	1102.7	1043.4	1010.6	996.5	984.0	1002.8
47.5°	1415.1	1215.2	1098.0	1023.1	991.8	960.6	927.8	905.9	895.0	896.5	895.0
50°	1208.9	1062.1	959.0	901.2	882.5	860.6	834.1	820.0	815.3	801.3	812.2
52.5°	1040.2	934.0	862.2	807.5	793.5	777.8	756.0	748.2	737.2	734.1	734.1
55°	904.4	821.6	763.8	727.9	710.7	698.2	685.7	676.3	668.5	668.5	668.5
57.5°	798.1	726.3	684.1	652.9	646.6	634.1	620.1	620.1	609.2	607.6	612.3
60°	707.6	643.5	610.7	584.2	574.8	571.7	557.6	557.6	554.5	546.7	552.9
62.5°	615.4	568.5	540.4	520.1	510.8	510.8	499.8	492.0	492.0	493.6	490.4
65°	531.1	496.7	471.7	456.1	451.4	445.1	443.6	437.3	432.7	434.2	432.7
67.5°	456.1	429.5	412.3	399.9	392.0	388.9	384.2	384.2	381.1	382.7	374.9
70°	388.9	362.4	348.3	335.8	332.7	332.7	326.4	328.0	324.9	329.6	326.4
72.5°	320.2	299.9	289.0	284.3	281.1	279.6	276.5	273.3	271.8	274.9	273.3
75°	259.3	242.1	234.3	231.2	228.0	228.0	226.5	224.9	223.4	223.4	223.4
77.5°	201.5	190.6	181.2	184.3	179.6	181.2	176.5	176.5	178.1	176.5	176.5
80°	148.4	140.6	140.6	137.4	131.2	134.3	134.3	129.6	128.1	131.2	126.5
82.5°	98.4	96.8	93.7	92.2	89.0	90.6	89.0	87.5	85.9	89.0	85.9
85°	57.8	57.8	56.2	53.1	56.2	54.7	53.1	53.1	51.5	51.5	51.5
87.5°	29.7	26.6	26.6	25.0	26.6	23.4	25.0	23.4	21.9	23.4	21.9
90°	8.8	9.1	9.4	9.7	9.9	10.0	10.1	10.3	10.4	10.6	10.4
92.5°	15.0	15.3	15.5	15.8	15.9	15.8	15.7	15.5	15.4	15.2	15.4
95°	26.4	26.7	27.0	27.3	27.5	27.5	27.5	27.5	27.5	27.5	27.5
97.5°	38.5	38.9	39.2	39.6	39.8	39.8	39.7	39.6	39.6	39.5	39.6
100°	52.0	52.3	52.5	52.8	52.9	53.0	53.1	53.3	53.4	53.6	53.4
102.5°	67.5	67.8	68.0	68.3	68.4	68.4	68.3	68.2	68.1	68.0	68.1
105°	83.2	83.2	83.2	83.2	83.2	83.3	83.4	83.6	83.7	83.9	83.7
107.5°	99.6	99.8	100.1	100.3	100.4	100.4	100.3	100.2	100.2	100.1	100.2
110°	116.2	116.6	116.9	117.2	117.4	117.3	117.1	117.0	116.8	116.6	116.8

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	132.9	133.3	133.7	134.1	134.3	134.3	134.3	134.3	134.3	134.3	134.3
115°	150.2	150.3	150.4	150.5	150.5	150.5	150.4	150.3	150.2	150.1	150.2
117.5°	167.4	167.4	167.4	167.4	167.4	167.3	167.0	166.8	166.5	166.3	166.5
120°	184.6	184.5	184.4	184.3	184.3	184.2	184.1	183.9	183.8	183.6	183.8
122.5°	202.1	201.8	201.6	201.3	201.2	201.1	200.9	200.6	200.4	200.2	200.4
125°	219.3	218.9	218.6	218.3	218.1	217.9	217.6	217.3	217.0	216.7	217.0
127.5°	236.3	235.9	235.4	234.9	234.7	234.5	234.2	233.9	233.6	233.3	233.6
130°	253.1	252.8	252.5	252.2	252.0	251.7	251.2	250.6	250.1	249.5	250.1
132.5°	269.5	269.1	268.8	268.4	268.2	268.0	267.6	267.2	266.8	266.4	266.8
135°	285.9	285.6	285.3	285.0	284.8	284.7	284.5	284.4	284.2	284.0	284.2
137.5°	302.0	301.6	301.2	300.8	300.6	300.5	300.3	300.0	299.8	299.6	299.8
140°	317.4	317.4	317.3	317.2	317.2	316.9	316.4	315.8	315.3	314.7	315.3
142.5°	332.2	332.2	332.1	332.0	332.0	331.8	331.4	331.0	330.6	330.2	330.6
145°	346.7	346.6	346.5	346.4	346.4	346.2	345.9	345.6	345.3	345.0	345.3
147.5°	360.5	360.5	360.5	360.5	360.5	360.3	359.8	359.3	358.9	358.4	358.9
150°	373.2	373.2	373.2	373.2	373.2	373.0	372.5	372.0	371.6	371.1	371.6
152.5°	384.7	384.8	385.0	385.1	385.2	385.0	384.6	384.2	383.8	383.4	383.8
155°	395.7	396.0	396.3	396.6	396.8	396.5	396.0	395.5	394.9	394.4	394.9
157.5°	405.6	405.9	406.2	406.5	406.7	406.5	406.0	405.5	405.1	404.6	405.1
160°	414.5	414.9	415.2	415.6	415.8	415.6	415.3	415.0	414.7	414.4	414.7
162.5°	422.9	423.3	423.7	424.1	424.3	424.0	423.5	422.9	422.4	421.8	422.4
165°	429.7	430.2	430.7	431.2	431.4	431.1	430.6	430.0	429.5	428.9	429.5
167.5°	435.7	436.1	436.6	437.1	437.3	437.1	436.6	436.1	435.7	435.2	435.7
170°	440.4	440.9	441.5	442.0	442.3	442.0	441.5	440.9	440.4	439.8	440.4
172.5°	444.2	444.6	445.1	445.6	445.8	445.5	445.0	444.4	443.9	443.3	443.9
175°	446.7	447.1	447.6	448.1	448.3	448.0	447.5	446.9	446.4	445.8	446.4
177.5°	448.1	448.5	449.0	449.5	449.7	449.4	448.9	448.3	447.8	447.2	447.8
180°	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9
2.5°	1727.5	1732.2	1719.7	1716.6	1716.6	1722.8	1718.1	1675.9	1683.8	1674.4	1671.3
5°	1918.0	1908.7	1896.2	1889.9	1882.1	1860.3	1858.7	1810.3	1800.9	1769.7	1755.6
7.5°	2127.3	2119.5	2082.0	2077.4	2074.2	2053.9	2002.4	1950.8	1913.4	1877.4	1843.1
10°	2366.3	2342.9	2325.7	2291.3	2274.2	2246.1	2178.9	2130.5	2066.4	2011.8	1939.9
12.5°	2653.7	2627.2	2569.4	2544.4	2522.5	2444.4	2377.3	2322.6	2197.6	2160.1	2071.1
15°	2864.6	2808.3	2802.1	2747.4	2744.3	2658.4	2530.3	2471.0	2374.1	2236.7	2144.5
17.5°	3092.6	3042.6	3003.6	2938.0	2928.6	2847.4	2753.7	2608.4	2502.2	2371.0	2253.9
20°	3259.7	3233.2	3166.0	3139.5	3084.8	3016.1	2919.2	2739.6	2610.0	2478.8	2335.1
22.5°	3392.5	3366.0	3312.8	3276.9	3245.7	3156.7	3041.1	2888.0	2709.9	2538.1	2389.7
25°	3390.9	3383.1	3361.3	3344.1	3320.7	3255.1	3158.2	3011.4	2813.0	2624.0	2417.9
27.5°	3198.8	3220.7	3258.2	3276.9	3272.2	3262.9	3208.2	3084.8	2906.7	2681.8	2450.7
30°	2799.0	2878.6	2948.9	3042.6	3070.7	3139.5	3170.7	3100.4	2958.3	2749.0	2492.8
32.5°	2321.0	2436.6	2589.7	2641.2	2730.2	2863.0	3011.4	3037.9	2948.9	2788.0	2519.4
35°	1904.0	1999.3	2118.0	2199.2	2278.9	2494.4	2681.8	2844.3	2873.9	2767.7	2513.1
37.5°	1576.0	1643.1	1747.8	1816.5	1889.9	2074.2	2336.6	2547.5	2695.9	2699.0	2496.0
40°	1338.6	1368.2	1458.8	1508.8	1579.1	1738.4	1972.7	2247.6	2464.7	2564.7	2450.7
42.5°	1134.0	1173.0	1248.0	1285.5	1330.8	1469.8	1624.4	1885.2	2153.9	2367.9	2366.3
45°	1012.1	1040.2	1074.6	1105.8	1157.4	1240.2	1416.7	1611.9	1869.6	2111.7	2207.0
47.5°	904.4	930.9	965.3	974.6	1009.0	1087.1	1194.9	1365.1	1605.7	1846.2	2025.8
50°	813.8	835.6	859.1	876.2	891.9	955.9	1037.1	1180.8	1372.9	1605.7	1829.0
52.5°	743.5	759.1	779.4	788.8	802.8	849.7	912.2	1018.4	1176.1	1388.6	1605.7
55°	677.9	688.8	701.3	716.9	723.2	757.5	806.0	896.5	1013.7	1204.2	1410.4
57.5°	617.0	621.6	629.5	638.8	646.6	676.3	718.5	779.4	882.5	1029.3	1224.6
60°	548.2	560.7	565.4	574.8	579.5	602.9	635.7	687.2	766.9	893.4	1040.2
62.5°	490.4	498.3	506.1	510.8	521.7	529.5	556.0	602.9	668.5	762.2	895.0
65°	438.9	442.0	446.7	451.4	454.5	463.9	488.9	520.1	570.1	652.9	756.0
67.5°	379.5	382.7	388.9	390.5	393.6	406.1	420.2	446.7	488.9	551.4	635.7
70°	321.8	326.4	329.6	332.7	337.4	342.1	357.7	379.5	412.3	456.1	521.7
72.5°	271.8	276.5	276.5	279.6	278.0	284.3	299.9	315.5	337.4	373.3	431.1
75°	221.8	221.8	224.9	226.5	228.0	234.3	240.5	253.0	270.2	298.3	334.3
77.5°	174.9	173.4	176.5	176.5	176.5	181.2	187.4	193.7	204.6	224.9	253.0
80°	128.1	128.1	131.2	132.8	129.6	131.2	134.3	140.6	148.4	162.4	178.1
82.5°	84.3	90.6	89.0	90.6	89.0	92.2	93.7	95.3	98.4	104.6	115.6
85°	51.5	51.5	51.5	53.1	51.5	53.1	53.1	53.1	54.7	57.8	62.5
87.5°	21.9	21.9	21.9	23.4	21.9	21.9	23.4	21.9	23.4	23.4	25.0
90°	10.3	10.1	10.0	9.9	9.7	9.4	9.1	8.8	8.5	7.5	6.5
92.5°	15.5	15.7	15.8	15.9	15.8	15.5	15.3	15.0	14.8	14.3	13.9
95°	27.5	27.5	27.5	27.5	27.3	27.0	26.7	26.4	26.1	25.5	24.9
97.5°	39.6	39.7	39.8	39.8	39.6	39.2	38.9	38.5	38.1	37.6	37.1
100°	53.3	53.1	53.0	52.9	52.8	52.5	52.3	52.0	51.8	51.4	51.0
102.5°	68.2	68.3	68.4	68.4	68.3	68.0	67.8	67.5	67.3	66.7	66.2
105°	83.6	83.4	83.3	83.2	83.2	83.2	83.2	83.2	83.2	82.5	81.8
107.5°	100.2	100.3	100.4	100.4	100.3	100.1	99.8	99.6	99.4	99.1	98.8
110°	117.0	117.1	117.3	117.4	117.2	116.9	116.6	116.2	115.9	115.7	115.6

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	134.3	134.3	134.3	134.3	134.1	133.7	133.3	132.9	132.5	132.5	132.5
115°	150.3	150.4	150.5	150.5	150.5	150.4	150.3	150.2	150.1	150.3	150.4
117.5°	166.8	167.0	167.3	167.4	167.4	167.4	167.4	167.4	167.4	167.6	167.7
120°	183.9	184.1	184.2	184.3	184.3	184.4	184.5	184.6	184.7	185.1	185.5
122.5°	200.6	200.9	201.1	201.2	201.3	201.6	201.8	202.1	202.3	202.5	202.6
125°	217.3	217.6	217.9	218.1	218.3	218.6	218.9	219.3	219.6	219.8	219.9
127.5°	233.9	234.2	234.5	234.7	234.9	235.4	235.9	236.3	236.8	237.0	237.1
130°	250.6	251.2	251.7	252.0	252.2	252.5	252.8	253.1	253.4	253.6	253.8
132.5°	267.2	267.6	268.0	268.2	268.4	268.8	269.1	269.5	269.9	270.1	270.3
135°	284.4	284.5	284.7	284.8	285.0	285.3	285.6	285.9	286.2	286.3	286.3
137.5°	300.0	300.3	300.5	300.6	300.8	301.2	301.6	302.0	302.4	302.2	301.9
140°	315.8	316.4	316.9	317.2	317.2	317.3	317.4	317.4	317.5	317.4	317.4
142.5°	331.0	331.4	331.8	332.0	332.0	332.1	332.2	332.2	332.3	332.1	332.0
145°	345.6	345.9	346.2	346.4	346.4	346.5	346.6	346.7	346.8	346.6	346.3
147.5°	359.3	359.8	360.3	360.5	360.5	360.5	360.5	360.5	360.5	360.3	360.1
150°	372.0	372.5	373.0	373.2	373.2	373.2	373.2	373.2	373.2	373.0	372.9
152.5°	384.2	384.6	385.0	385.2	385.1	385.0	384.8	384.7	384.5	384.4	384.3
155°	395.5	396.0	396.5	396.8	396.6	396.3	396.0	395.7	395.4	395.3	395.3
157.5°	405.5	406.0	406.5	406.7	406.5	406.2	405.9	405.6	405.3	405.2	405.1
160°	415.0	415.3	415.6	415.8	415.6	415.2	414.9	414.5	414.1	414.1	414.1
162.5°	422.9	423.5	424.0	424.3	424.1	423.7	423.3	422.9	422.5	422.4	422.4
165°	430.0	430.6	431.1	431.4	431.2	430.7	430.2	429.7	429.2	429.2	429.2
167.5°	436.1	436.6	437.1	437.3	437.1	436.6	436.1	435.7	435.2	435.1	435.1
170°	440.9	441.5	442.0	442.3	442.0	441.5	440.9	440.4	439.8	439.8	439.8
172.5°	444.4	445.0	445.5	445.8	445.6	445.1	444.6	444.2	443.7	443.7	443.7
175°	446.9	447.5	448.0	448.3	448.1	447.6	447.1	446.7	446.2	446.2	446.2
177.5°	448.3	448.9	449.4	449.7	449.5	449.0	448.5	448.1	447.6	447.6	447.6
180°	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9
2.5°	1655.6	1651.0	1651.0	1647.8	1638.5	1621.3	1619.7	1622.8	1613.5	1604.1	1590.0
5°	1736.9	1707.2	1697.8	1688.4	1669.7	1638.5	1626.0	1615.0	1597.9	1577.5	1555.7
7.5°	1805.6	1763.4	1750.9	1733.7	1696.3	1652.5	1624.4	1601.0	1577.5	1549.4	1522.9
10°	1891.5	1830.6	1800.9	1775.9	1724.4	1663.5	1621.3	1586.9	1549.4	1515.1	1480.7
12.5°	1988.3	1889.9	1880.6	1819.6	1760.3	1669.7	1618.2	1568.2	1518.2	1476.0	1440.1
15°	2069.6	1961.8	1922.7	1882.1	1768.1	1655.6	1605.7	1549.4	1491.6	1446.3	1393.2
17.5°	2121.1	2032.1	1949.3	1894.6	1775.9	1675.9	1579.1	1515.1	1454.2	1391.7	1347.9
20°	2183.6	2053.9	1982.1	1908.7	1791.5	1660.3	1563.5	1483.8	1408.9	1352.6	1299.5
22.5°	2246.1	2071.1	2011.8	1932.1	1794.7	1644.7	1535.4	1455.7	1369.8	1313.6	1255.8
25°	2239.8	2096.1	1997.7	1930.5	1763.4	1630.7	1502.6	1408.9	1329.2	1257.4	1199.6
27.5°	2244.5	2068.0	1968.0	1889.9	1741.5	1610.3	1468.2	1369.8	1287.0	1212.1	1151.1
30°	2246.1	2025.8	1938.4	1844.6	1700.9	1561.9	1429.2	1329.2	1241.7	1160.5	1105.8
32.5°	2241.4	1991.5	1882.1	1797.8	1636.9	1515.1	1383.9	1277.7	1188.6	1113.7	1062.1
35°	2230.4	1950.8	1824.3	1718.1	1571.3	1447.9	1341.7	1232.4	1137.1	1068.4	1009.0
37.5°	2200.8	1907.1	1763.4	1658.8	1494.8	1369.8	1276.1	1185.5	1093.3	1012.1	962.1
40°	2178.9	1847.8	1702.5	1588.5	1412.0	1290.2	1212.1	1126.1	1035.6	962.1	913.7
42.5°	2128.9	1791.5	1640.0	1504.1	1330.8	1205.8	1132.4	1063.7	985.6	913.7	870.0
45°	2047.7	1730.6	1563.5	1426.0	1241.7	1123.0	1055.9	999.6	930.9	862.2	818.4
47.5°	1933.7	1643.1	1482.3	1344.8	1154.3	1034.0	966.8	924.7	870.0	812.2	774.7
50°	1810.3	1547.9	1399.5	1263.6	1069.9	952.8	887.2	848.1	812.2	759.1	723.2
52.5°	1649.4	1446.3	1304.2	1174.6	979.3	866.9	809.1	781.0	743.5	706.0	674.8
55°	1493.2	1315.1	1198.0	1074.6	890.3	785.6	729.4	699.7	677.9	646.6	621.6
57.5°	1312.0	1193.3	1085.5	973.1	807.5	712.2	659.1	623.2	609.2	595.1	571.7
60°	1144.9	1054.3	966.8	873.1	721.6	635.7	584.2	556.0	542.0	532.6	517.0
62.5°	991.8	921.5	846.6	771.6	634.1	556.0	517.0	488.9	476.4	474.8	460.8
65°	845.0	795.0	734.1	660.7	552.9	484.2	446.7	429.5	415.5	415.5	404.5
67.5°	698.2	663.8	615.4	563.9	479.5	415.5	381.1	365.5	357.7	357.7	349.9
70°	581.0	557.6	513.9	468.6	395.2	346.7	320.2	306.1	301.5	303.0	296.8
72.5°	471.7	446.7	410.8	378.0	323.3	287.4	268.7	253.0	245.2	246.8	245.2
75°	365.5	353.0	321.8	296.8	253.0	228.0	210.9	203.1	196.8	198.4	195.2
77.5°	274.9	256.2	239.0	221.8	195.2	174.9	160.9	153.1	148.4	148.4	148.4
80°	187.4	184.3	170.3	160.9	139.0	123.4	112.5	110.9	106.2	106.2	106.2
82.5°	121.8	114.0	106.2	100.0	87.5	78.1	73.4	70.3	68.7	67.2	70.3
85°	67.2	62.5	59.4	53.1	48.4	43.7	39.0	37.5	35.9	37.5	35.9
87.5°	26.6	21.9	21.9	20.3	18.7	17.2	17.2	14.1	14.1	12.5	12.5
90°	5.4	4.4	3.9	3.5	2.7	2.0	1.2	0.4	1.2	2.0	2.7
92.5°	13.4	12.9	12.7	12.5	12.0	11.5	11.1	10.6	11.1	11.5	12.0
95°	24.2	23.6	23.3	23.0	22.5	21.9	21.4	20.8	21.4	21.9	22.5
97.5°	36.6	36.1	35.9	35.7	35.3	35.0	34.6	34.2	34.6	35.0	35.3
100°	50.6	50.2	50.0	49.8	49.3	48.8	48.4	47.9	48.4	48.8	49.3
102.5°	65.6	65.1	64.8	64.7	64.5	64.2	64.0	63.8	64.0	64.2	64.5
105°	81.1	80.4	80.0	79.9	79.8	79.6	79.5	79.3	79.5	79.6	79.8
107.5°	98.5	98.2	98.0	98.0	97.9	97.8	97.7	97.6	97.7	97.8	97.9
110°	115.4	115.3	115.2	115.1	115.0	114.8	114.7	114.5	114.7	114.8	115.0

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	132.5	132.5	132.5	132.5	132.4	132.3	132.3	132.2	132.3	132.3	132.4
115°	150.6	150.7	150.8	150.7	150.5	150.2	150.0	149.8	150.0	150.2	150.5
117.5°	167.9	168.0	168.1	168.1	168.0	167.9	167.8	167.7	167.8	167.9	168.0
120°	185.8	186.2	186.4	186.2	185.7	185.2	184.8	184.3	184.8	185.2	185.7
122.5°	202.8	202.9	203.0	202.8	202.5	202.2	201.9	201.6	201.9	202.2	202.5
125°	220.1	220.2	220.3	220.2	219.9	219.7	219.4	219.2	219.4	219.7	219.9
127.5°	237.3	237.4	237.5	237.3	236.8	236.3	235.9	235.4	235.9	236.3	236.8
130°	254.1	254.3	254.4	254.1	253.5	252.8	252.2	251.6	252.2	252.8	253.5
132.5°	270.4	270.6	270.7	270.4	269.7	269.1	268.4	267.8	268.4	269.1	269.7
135°	286.4	286.5	286.5	286.3	285.8	285.3	284.9	284.4	284.9	285.3	285.8
137.5°	301.7	301.4	301.3	301.1	300.7	300.4	300.0	299.6	300.0	300.4	300.7
140°	317.3	317.2	317.2	317.0	316.6	316.2	315.8	315.4	315.8	316.2	316.6
142.5°	331.8	331.7	331.6	331.4	331.0	330.7	330.3	329.9	330.3	330.7	331.0
145°	346.1	345.8	345.7	345.6	345.5	345.3	345.2	345.0	345.2	345.3	345.5
147.5°	359.8	359.6	359.5	359.3	359.0	358.7	358.4	358.1	358.4	358.7	359.0
150°	372.7	372.6	372.5	372.4	372.3	372.1	372.0	371.8	372.0	372.1	372.3
152.5°	384.2	384.1	384.1	384.0	383.8	383.5	383.3	383.1	383.3	383.5	383.8
155°	395.2	395.1	395.1	395.1	395.1	395.1	395.1	395.1	395.1	395.1	395.1
157.5°	405.0	404.9	404.9	404.9	405.0	405.1	405.2	405.3	405.2	405.1	405.0
160°	414.1	414.1	414.1	414.2	414.3	414.5	414.6	414.8	414.6	414.5	414.3
162.5°	422.3	422.2	422.2	422.3	422.5	422.8	423.0	423.2	423.0	422.8	422.5
165°	429.2	429.2	429.2	429.3	429.6	429.8	430.1	430.3	430.1	429.8	429.6
167.5°	435.0	434.9	434.9	435.1	435.4	435.7	436.0	436.3	436.0	435.7	435.4
170°	439.8	439.8	439.8	440.0	440.3	440.6	440.9	441.2	440.9	440.6	440.3
172.5°	443.7	443.7	443.7	443.9	444.2	444.5	444.8	445.1	444.8	444.5	444.2
175°	446.2	446.2	446.2	446.4	446.7	447.0	447.3	447.6	447.3	447.0	446.7
177.5°	447.6	447.6	447.6	447.8	448.1	448.4	448.7	449.0	448.7	448.4	448.1
180°	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9
2.5°	1586.9	1585.4	1588.5	1579.1	1563.5	1555.7	1533.8	1529.1	1527.6	1529.1	1530.7
5°	1543.2	1541.6	1536.9	1521.3	1502.6	1488.5	1462.0	1460.4	1451.0	1441.7	1446.3
7.5°	1501.0	1494.8	1485.4	1465.1	1440.1	1424.5	1402.6	1387.0	1374.5	1366.7	1360.4
10°	1458.8	1449.5	1440.1	1413.5	1382.3	1358.9	1332.3	1319.8	1305.8	1299.5	1293.3
12.5°	1404.2	1394.8	1377.6	1346.4	1327.6	1298.0	1271.4	1258.9	1251.1	1238.6	1230.8
15°	1360.4	1341.7	1332.3	1299.5	1260.5	1257.4	1208.9	1205.8	1190.2	1190.2	1177.7
17.5°	1310.5	1296.4	1279.2	1246.4	1218.3	1190.2	1165.2	1155.8	1141.8	1138.6	1132.4
20°	1262.0	1243.3	1237.0	1204.2	1174.6	1140.2	1113.7	1104.3	1098.0	1091.8	1096.5
22.5°	1212.1	1196.4	1180.8	1151.1	1129.3	1094.9	1079.3	1069.9	1060.5	1057.4	1059.0
25°	1163.6	1149.6	1134.0	1104.3	1080.9	1052.7	1038.7	1034.0	1029.3	1029.3	1027.7
27.5°	1116.8	1102.7	1088.7	1062.1	1038.7	1018.4	1007.4	1002.8	998.1	1001.2	1004.3
30°	1068.4	1055.9	1043.4	1019.9	1001.2	982.5	976.2	973.1	971.5	979.3	979.3
32.5°	1024.6	1013.7	1004.3	982.5	963.7	948.1	943.4	945.0	946.5	951.2	954.3
35°	979.3	971.5	962.1	943.4	927.8	913.7	915.3	915.3	918.4	926.2	932.5
37.5°	938.7	927.8	920.0	904.4	891.9	879.4	884.1	888.7	891.9	901.2	904.4
40°	890.3	885.6	879.4	863.7	852.8	851.3	852.8	855.9	862.2	866.9	871.6
42.5°	851.3	845.0	837.2	824.7	815.3	816.9	818.4	821.6	824.7	832.5	837.2
45°	807.5	802.8	796.6	785.6	777.8	779.4	781.0	781.0	784.1	793.5	796.6
47.5°	759.1	760.7	752.8	741.9	737.2	737.2	737.2	740.4	748.2	751.3	752.8
50°	712.2	709.1	707.6	696.6	693.5	691.9	693.5	695.1	706.0	704.4	709.1
52.5°	662.3	662.3	660.7	654.4	649.8	649.8	646.6	654.4	657.6	660.7	665.4
55°	613.8	609.2	607.6	604.5	598.2	596.7	599.8	609.2	612.3	615.4	620.1
57.5°	560.7	560.7	557.6	552.9	552.9	552.9	552.9	559.2	563.9	567.0	576.4
60°	512.3	506.1	501.4	501.4	501.4	499.8	509.2	509.2	518.6	520.1	523.2
62.5°	454.5	451.4	448.3	449.8	448.3	451.4	454.5	460.8	462.3	467.0	471.7
65°	399.9	399.9	396.7	406.1	399.9	399.9	407.7	407.7	410.8	415.5	421.7
67.5°	346.7	348.3	345.2	345.2	348.3	349.9	351.4	357.7	359.2	365.5	373.3
70°	292.1	295.2	296.8	293.6	296.8	299.9	303.0	304.6	310.8	313.9	318.6
72.5°	243.7	246.8	242.1	243.7	245.2	248.3	249.9	253.0	256.2	265.5	268.7
75°	195.2	193.7	192.1	198.4	195.2	201.5	203.1	203.1	206.2	214.0	217.1
77.5°	149.9	149.9	151.5	148.4	153.1	151.5	153.1	157.8	162.4	162.4	174.9
80°	104.6	107.8	107.8	107.8	109.3	110.9	107.8	115.6	117.1	117.1	121.8
82.5°	67.2	68.7	67.2	70.3	70.3	73.4	71.8	73.4	76.5	79.7	81.2
85°	35.9	35.9	39.0	39.0	37.5	39.0	37.5	39.0	42.2	42.2	43.7
87.5°	12.5	12.5	12.5	12.5	14.1	12.5	14.1	14.1	12.5	12.5	17.2
90°	3.5	3.9	4.4	5.4	6.5	7.5	8.5	8.8	9.1	9.4	9.7
92.5°	12.5	12.7	12.9	13.4	13.9	14.3	14.8	15.0	15.3	15.5	15.8
95°	23.0	23.3	23.6	24.2	24.9	25.5	26.1	26.4	26.7	27.0	27.3
97.5°	35.7	35.9	36.1	36.6	37.1	37.6	38.1	38.5	38.9	39.2	39.6
100°	49.8	50.0	50.2	50.6	51.0	51.4	51.8	52.0	52.3	52.5	52.8
102.5°	64.7	64.8	65.1	65.6	66.2	66.7	67.3	67.5	67.8	68.0	68.3
105°	79.9	80.0	80.4	81.1	81.8	82.5	83.2	83.2	83.2	83.2	83.2
107.5°	98.0	98.0	98.2	98.5	98.8	99.1	99.4	99.6	99.8	100.1	100.3
110°	115.1	115.2	115.3	115.4	115.6	115.7	115.9	116.2	116.6	116.9	117.2

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	132.5	132.5	132.5	132.5	132.5	132.5	132.5	132.9	133.3	133.7	134.1
115°	150.7	150.8	150.7	150.6	150.4	150.3	150.1	150.2	150.3	150.4	150.5
117.5°	168.1	168.1	168.0	167.9	167.7	167.6	167.4	167.4	167.4	167.4	167.4
120°	186.2	186.4	186.2	185.8	185.5	185.1	184.7	184.6	184.5	184.4	184.3
122.5°	202.8	203.0	202.9	202.8	202.6	202.5	202.3	202.1	201.8	201.6	201.3
125°	220.2	220.3	220.2	220.1	219.9	219.8	219.6	219.3	218.9	218.6	218.3
127.5°	237.3	237.5	237.4	237.3	237.1	237.0	236.8	236.3	235.9	235.4	234.9
130°	254.1	254.4	254.3	254.1	253.8	253.6	253.4	253.1	252.8	252.5	252.2
132.5°	270.4	270.7	270.6	270.4	270.3	270.1	269.9	269.5	269.1	268.8	268.4
135°	286.3	286.5	286.5	286.4	286.3	286.3	286.2	285.9	285.6	285.3	285.0
137.5°	301.1	301.3	301.4	301.7	301.9	302.2	302.4	302.0	301.6	301.2	300.8
140°	317.0	317.2	317.2	317.3	317.4	317.4	317.5	317.4	317.4	317.3	317.2
142.5°	331.4	331.6	331.7	331.8	332.0	332.1	332.3	332.2	332.2	332.1	332.0
145°	345.6	345.7	345.8	346.1	346.3	346.6	346.8	346.7	346.6	346.5	346.4
147.5°	359.3	359.5	359.6	359.8	360.1	360.3	360.5	360.5	360.5	360.5	360.5
150°	372.4	372.5	372.6	372.7	372.9	373.0	373.2	373.2	373.2	373.2	373.2
152.5°	384.0	384.1	384.1	384.2	384.3	384.4	384.5	384.7	384.8	385.0	385.1
155°	395.1	395.1	395.1	395.2	395.3	395.3	395.4	395.7	396.0	396.3	396.6
157.5°	404.9	404.9	404.9	405.0	405.1	405.2	405.3	405.6	405.9	406.2	406.5
160°	414.2	414.1	414.1	414.1	414.1	414.1	414.1	414.5	414.9	415.2	415.6
162.5°	422.3	422.2	422.2	422.3	422.4	422.4	422.5	422.9	423.3	423.7	424.1
165°	429.3	429.2	429.2	429.2	429.2	429.2	429.2	429.7	430.2	430.7	431.2
167.5°	435.1	434.9	434.9	435.0	435.1	435.1	435.2	435.7	436.1	436.6	437.1
170°	440.0	439.8	439.8	439.8	439.8	439.8	439.8	440.4	440.9	441.5	442.0
172.5°	443.9	443.7	443.7	443.7	443.7	443.7	443.7	444.2	444.6	445.1	445.6
175°	446.4	446.2	446.2	446.2	446.2	446.2	446.2	446.7	447.1	447.6	448.1
177.5°	447.8	447.6	447.6	447.6	447.6	447.6	447.6	448.1	448.5	449.0	449.5
180°	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9
2.5°	1529.1	1530.7	1524.4	1519.8	1532.3	1524.4	1524.4	1526.0	1522.9	1527.6	1526.0
5°	1443.2	1444.8	1433.8	1437.0	1430.7	1429.2	1427.6	1437.0	1435.4	1433.8	1437.0
7.5°	1358.9	1358.9	1354.2	1351.1	1351.1	1346.4	1352.6	1351.1	1354.2	1354.2	1358.9
10°	1288.6	1291.7	1283.9	1276.1	1274.5	1276.1	1276.1	1277.7	1279.2	1290.2	1288.6
12.5°	1230.8	1226.1	1224.6	1219.9	1212.1	1208.9	1205.8	1223.0	1218.3	1218.3	1218.3
15°	1166.8	1177.7	1176.1	1162.1	1159.0	1165.2	1162.1	1162.1	1177.7	1176.1	1174.6
17.5°	1132.4	1129.3	1126.1	1118.3	1119.9	1118.3	1119.9	1119.9	1129.3	1129.3	1129.3
20°	1093.3	1087.1	1087.1	1084.0	1084.0	1079.3	1085.5	1087.1	1093.3	1093.3	1094.9
22.5°	1059.0	1054.3	1054.3	1052.7	1055.9	1049.6	1055.9	1057.4	1057.4	1062.1	1062.1
25°	1029.3	1026.2	1026.2	1029.3	1029.3	1029.3	1029.3	1035.6	1030.9	1032.4	1030.9
27.5°	1002.8	1004.3	1005.9	1007.4	1005.9	1007.4	1009.0	1012.1	1013.7	1012.1	1009.0
30°	977.8	982.5	984.0	984.0	987.1	988.7	990.3	990.3	991.8	987.1	990.3
32.5°	959.0	959.0	962.1	963.7	966.8	968.4	968.4	971.5	970.0	965.3	966.8
35°	932.5	932.5	938.7	941.8	946.5	945.0	946.5	946.5	948.1	945.0	940.3
37.5°	905.9	909.0	909.0	915.3	916.9	918.4	916.9	920.0	918.4	915.3	913.7
40°	874.7	873.1	874.7	879.4	880.9	880.9	880.9	884.1	884.1	884.1	882.5
42.5°	835.6	840.3	838.8	843.4	841.9	841.9	845.0	848.1	849.7	845.0	846.6
45°	798.1	798.1	801.3	801.3	802.8	802.8	809.1	806.0	809.1	806.0	807.5
47.5°	757.5	759.1	759.1	760.7	763.8	766.9	763.8	765.3	765.3	766.9	763.8
50°	712.2	712.2	715.4	720.0	726.3	723.2	721.6	727.9	723.2	723.2	720.0
52.5°	665.4	670.1	671.6	676.3	681.0	682.6	684.1	681.0	682.6	677.9	679.4
55°	620.1	621.6	627.9	632.6	637.3	637.3	635.7	637.3	638.8	632.6	632.6
57.5°	574.8	579.5	585.7	585.7	592.0	592.0	590.4	590.4	592.0	587.3	585.7
60°	526.4	531.1	538.9	538.9	548.2	549.8	546.7	543.6	543.6	538.9	540.4
62.5°	474.8	479.5	484.2	492.0	498.3	495.1	501.4	495.1	496.7	487.3	487.3
65°	429.5	431.1	438.9	446.7	446.7	449.8	446.7	448.3	443.6	443.6	437.3
67.5°	376.4	376.4	384.2	392.0	399.9	399.9	399.9	395.2	395.2	390.5	390.5
70°	329.6	328.0	335.8	340.5	345.2	346.7	343.6	342.1	338.9	334.3	332.7
72.5°	271.8	274.9	282.7	285.8	293.6	292.1	299.9	290.5	290.5	282.7	281.1
75°	220.2	223.4	231.2	235.9	240.5	240.5	245.2	240.5	234.3	231.2	229.6
77.5°	174.9	173.4	179.6	187.4	189.0	187.4	190.6	189.0	182.7	182.7	179.6
80°	125.0	129.6	135.9	134.3	140.6	139.0	139.0	135.9	135.9	131.2	134.3
82.5°	82.8	87.5	89.0	87.5	89.0	92.2	93.7	92.2	92.2	89.0	90.6
85°	43.7	43.7	46.9	48.4	46.9	46.9	48.4	53.1	50.0	46.9	50.0
87.5°	14.1	12.5	12.5	14.1	12.5	12.5	14.1	14.1	15.6	15.6	15.6
90°	9.9	10.0	10.1	10.3	10.4	10.6	10.4	10.3	10.1	10.0	9.9
92.5°	15.9	15.8	15.7	15.5	15.4	15.2	15.4	15.5	15.7	15.8	15.9
95°	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5
97.5°	39.8	39.8	39.7	39.6	39.6	39.5	39.6	39.6	39.7	39.8	39.8
100°	52.9	53.0	53.1	53.3	53.4	53.6	53.4	53.3	53.1	53.0	52.9
102.5°	68.4	68.4	68.3	68.2	68.1	68.0	68.1	68.2	68.3	68.4	68.4
105°	83.2	83.3	83.4	83.6	83.7	83.9	83.7	83.6	83.4	83.3	83.2
107.5°	100.4	100.4	100.3	100.2	100.2	100.1	100.2	100.2	100.3	100.4	100.4
110°	117.4	117.3	117.1	117.0	116.8	116.6	116.8	117.0	117.1	117.3	117.4

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	134.3	134.3	134.3	134.3	134.3	134.3	134.3	134.3	134.3	134.3	134.3
115°	150.5	150.5	150.4	150.3	150.2	150.1	150.2	150.3	150.4	150.5	150.5
117.5°	167.4	167.3	167.0	166.8	166.5	166.3	166.5	166.8	167.0	167.3	167.4
120°	184.3	184.2	184.1	183.9	183.8	183.6	183.8	183.9	184.1	184.2	184.3
122.5°	201.2	201.1	200.9	200.6	200.4	200.2	200.4	200.6	200.9	201.1	201.2
125°	218.1	217.9	217.6	217.3	217.0	216.7	217.0	217.3	217.6	217.9	218.1
127.5°	234.7	234.5	234.2	233.9	233.6	233.3	233.6	233.9	234.2	234.5	234.7
130°	252.0	251.7	251.2	250.6	250.1	249.5	250.1	250.6	251.2	251.7	252.0
132.5°	268.2	268.0	267.6	267.2	266.8	266.4	266.8	267.2	267.6	268.0	268.2
135°	284.8	284.7	284.5	284.4	284.2	284.0	284.2	284.4	284.5	284.7	284.8
137.5°	300.6	300.5	300.3	300.0	299.8	299.6	299.8	300.0	300.3	300.5	300.6
140°	317.2	316.9	316.4	315.8	315.3	314.7	315.3	315.8	316.4	316.9	317.2
142.5°	332.0	331.8	331.4	331.0	330.6	330.2	330.6	331.0	331.4	331.8	332.0
145°	346.4	346.2	345.9	345.6	345.3	345.0	345.3	345.6	345.9	346.2	346.4
147.5°	360.5	360.3	359.8	359.3	358.9	358.4	358.9	359.3	359.8	360.3	360.5
150°	373.2	373.0	372.5	372.0	371.6	371.1	371.6	372.0	372.5	373.0	373.2
152.5°	385.2	385.0	384.6	384.2	383.8	383.4	383.8	384.2	384.6	385.0	385.2
155°	396.8	396.5	396.0	395.5	394.9	394.4	394.9	395.5	396.0	396.5	396.8
157.5°	406.7	406.5	406.0	405.5	405.1	404.6	405.1	405.5	406.0	406.5	406.7
160°	415.8	415.6	415.3	415.0	414.7	414.4	414.7	415.0	415.3	415.6	415.8
162.5°	424.3	424.0	423.5	422.9	422.4	421.8	422.4	422.9	423.5	424.0	424.3
165°	431.4	431.1	430.6	430.0	429.5	428.9	429.5	430.0	430.6	431.1	431.4
167.5°	437.3	437.1	436.6	436.1	435.7	435.2	435.7	436.1	436.6	437.1	437.3
170°	442.3	442.0	441.5	440.9	440.4	439.8	440.4	440.9	441.5	442.0	442.3
172.5°	445.8	445.5	445.0	444.4	443.9	443.3	443.9	444.4	445.0	445.5	445.8
175°	448.3	448.0	447.5	446.9	446.4	445.8	446.4	446.9	447.5	448.0	448.3
177.5°	449.7	449.4	448.9	448.3	447.8	447.2	447.8	448.3	448.9	449.4	449.7
180°	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9	1611.9
2.5°	1530.7	1533.8	1535.4	1529.1	1524.4	1532.3	1543.2	1551.0	1557.2	1565.1	1569.7
5°	1440.1	1451.0	1451.0	1454.2	1458.8	1466.6	1487.0	1501.0	1513.5	1522.9	1530.7
7.5°	1363.6	1371.4	1376.1	1383.9	1391.7	1402.6	1426.0	1446.3	1465.1	1476.0	1488.5
10°	1294.8	1301.1	1308.9	1313.6	1327.6	1343.3	1372.9	1390.1	1412.0	1429.2	1444.8
12.5°	1229.2	1251.1	1255.8	1254.2	1266.7	1283.9	1313.6	1340.1	1363.6	1380.7	1397.9
15°	1182.4	1190.2	1199.6	1198.0	1224.6	1229.2	1254.2	1285.5	1316.7	1327.6	1343.3
17.5°	1130.8	1143.3	1152.7	1157.4	1165.2	1182.4	1205.8	1229.2	1269.8	1271.4	1312.0
20°	1090.2	1102.7	1109.0	1115.2	1119.9	1140.2	1160.5	1187.1	1219.9	1237.0	1258.9
22.5°	1063.7	1069.9	1074.6	1079.3	1085.5	1096.5	1121.5	1151.1	1173.0	1191.8	1205.8
25°	1032.4	1038.7	1044.9	1048.1	1052.7	1059.0	1077.7	1101.2	1132.4	1144.9	1159.0
27.5°	1010.6	1010.6	1013.7	1013.7	1019.9	1026.2	1040.2	1062.1	1087.1	1102.7	1121.5
30°	987.1	985.6	987.1	985.6	984.0	993.4	1005.9	1024.6	1041.8	1060.5	1073.0
32.5°	963.7	962.1	962.1	963.7	957.5	962.1	968.4	985.6	1004.3	1013.7	1027.7
35°	938.7	935.6	935.6	935.6	932.5	929.3	935.6	951.2	963.7	976.2	987.1
37.5°	913.7	909.0	909.0	905.9	902.8	898.1	898.1	910.6	927.8	932.5	946.5
40°	879.4	879.4	876.2	874.7	871.6	868.4	863.7	874.7	890.3	895.0	905.9
42.5°	845.0	840.3	838.8	838.8	838.8	834.1	830.9	838.8	848.1	855.9	862.2
45°	806.0	802.8	804.4	802.8	799.7	798.1	796.6	799.7	810.6	813.8	821.6
47.5°	763.8	762.2	762.2	760.7	759.1	760.7	754.4	762.2	765.3	768.5	774.7
50°	720.0	718.5	716.9	715.4	715.4	716.9	715.4	715.4	721.6	724.7	731.0
52.5°	676.3	671.6	671.6	670.1	670.1	666.9	670.1	671.6	674.8	677.9	681.0
55°	629.5	629.5	624.8	624.8	621.6	621.6	623.2	621.6	627.9	631.0	631.0
57.5°	584.2	577.9	579.5	576.4	573.2	571.7	571.7	574.8	577.9	577.9	581.0
60°	535.7	529.5	527.9	521.7	524.8	520.1	521.7	521.7	527.9	524.8	527.9
62.5°	487.3	479.5	474.8	471.7	471.7	473.3	470.1	468.6	471.7	474.8	481.1
65°	435.8	431.1	426.4	421.7	421.7	420.2	423.3	418.6	417.0	418.6	421.7
67.5°	382.7	378.0	373.3	368.6	370.2	365.5	362.4	367.1	363.9	365.5	368.6
70°	331.1	328.0	318.6	315.5	313.9	315.5	313.9	310.8	315.5	313.9	315.5
72.5°	279.6	276.5	271.8	264.0	264.0	262.4	260.8	260.8	259.3	259.3	259.3
75°	229.6	223.4	218.7	217.1	214.0	212.4	210.9	207.7	209.3	210.9	207.7
77.5°	178.1	170.3	168.7	168.7	164.0	164.0	165.6	164.0	162.4	162.4	162.4
80°	131.2	125.0	125.0	121.8	118.7	118.7	118.7	118.7	117.1	115.6	117.1
82.5°	84.3	82.8	81.2	81.2	84.3	78.1	81.2	79.7	78.1	78.1	76.5
85°	46.9	48.4	46.9	48.4	45.3	46.9	46.9	46.9	45.3	46.9	43.7
87.5°	17.2	17.2	17.2	18.7	18.7	18.7	18.7	18.7	20.3	18.7	18.7
90°	9.7	9.4	9.1	8.8	8.5	7.5	6.5	5.4	4.4	3.9	3.5
92.5°	15.8	15.5	15.3	15.0	14.8	14.3	13.9	13.4	12.9	12.7	12.5
95°	27.3	27.0	26.7	26.4	26.1	25.5	24.9	24.2	23.6	23.3	23.0
97.5°	39.6	39.2	38.9	38.5	38.1	37.6	37.1	36.6	36.1	35.9	35.7
100°	52.8	52.5	52.3	52.0	51.8	51.4	51.0	50.6	50.2	50.0	49.8
102.5°	68.3	68.0	67.8	67.5	67.3	66.7	66.2	65.6	65.1	64.8	64.7
105°	83.2	83.2	83.2	83.2	83.2	82.5	81.8	81.1	80.4	80.0	79.9
107.5°	100.3	100.1	99.8	99.6	99.4	99.1	98.8	98.5	98.2	98.0	98.0
110°	117.2	116.9	116.6	116.2	115.9	115.7	115.6	115.4	115.3	115.2	115.1

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	134.1	133.7	133.3	132.9	132.5	132.5	132.5	132.5	132.5	132.5	132.5
115°	150.5	150.4	150.3	150.2	150.1	150.3	150.4	150.6	150.7	150.8	150.7
117.5°	167.4	167.4	167.4	167.4	167.4	167.6	167.7	167.9	168.0	168.1	168.1
120°	184.3	184.4	184.5	184.6	184.7	185.1	185.5	185.8	186.2	186.4	186.2
122.5°	201.3	201.6	201.8	202.1	202.3	202.5	202.6	202.8	202.9	203.0	202.8
125°	218.3	218.6	218.9	219.3	219.6	219.8	219.9	220.1	220.2	220.3	220.2
127.5°	234.9	235.4	235.9	236.3	236.8	237.0	237.1	237.3	237.4	237.5	237.3
130°	252.2	252.5	252.8	253.1	253.4	253.6	253.8	254.1	254.3	254.4	254.1
132.5°	268.4	268.8	269.1	269.5	269.9	270.1	270.3	270.4	270.6	270.7	270.4
135°	285.0	285.3	285.6	285.9	286.2	286.3	286.3	286.4	286.5	286.5	286.3
137.5°	300.8	301.2	301.6	302.0	302.4	302.2	301.9	301.7	301.4	301.3	301.1
140°	317.2	317.3	317.4	317.4	317.5	317.4	317.4	317.3	317.2	317.2	317.0
142.5°	332.0	332.1	332.2	332.2	332.3	332.1	332.0	331.8	331.7	331.6	331.4
145°	346.4	346.5	346.6	346.7	346.8	346.6	346.3	346.1	345.8	345.7	345.6
147.5°	360.5	360.5	360.5	360.5	360.5	360.3	360.1	359.8	359.6	359.5	359.3
150°	373.2	373.2	373.2	373.2	373.2	373.0	372.9	372.7	372.6	372.5	372.4
152.5°	385.1	385.0	384.8	384.7	384.5	384.4	384.3	384.2	384.1	384.1	384.0
155°	396.6	396.3	396.0	395.7	395.4	395.3	395.3	395.2	395.1	395.1	395.1
157.5°	406.5	406.2	405.9	405.6	405.3	405.2	405.1	405.0	404.9	404.9	404.9
160°	415.6	415.2	414.9	414.5	414.1	414.1	414.1	414.1	414.1	414.1	414.2
162.5°	424.1	423.7	423.3	422.9	422.5	422.4	422.4	422.3	422.2	422.2	422.3
165°	431.2	430.7	430.2	429.7	429.2	429.2	429.2	429.2	429.2	429.2	429.3
167.5°	437.1	436.6	436.1	435.7	435.2	435.1	435.1	435.0	434.9	434.9	435.1
170°	442.0	441.5	440.9	440.4	439.8	439.8	439.8	439.8	439.8	439.8	440.0
172.5°	445.6	445.1	444.6	444.2	443.7	443.7	443.7	443.7	443.7	443.7	443.9
175°	448.1	447.6	447.1	446.7	446.2	446.2	446.2	446.2	446.2	446.2	446.4
177.5°	449.5	449.0	448.5	448.1	447.6	447.6	447.6	447.6	447.6	447.6	447.8
180°	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1611.9	1611.9	1611.9	1611.9
2.5°	1577.5	1582.2	1597.9	1616.6
5°	1546.3	1558.8	1580.7	1610.3
7.5°	1511.9	1530.7	1561.9	1599.4
10°	1472.9	1499.5	1538.5	1585.4
12.5°	1430.7	1465.1	1515.1	1563.5
15°	1404.2	1438.5	1483.8	1536.9
17.5°	1352.6	1393.2	1440.1	1515.1
20°	1299.5	1344.8	1405.7	1480.7
22.5°	1258.9	1307.3	1365.1	1444.8
25°	1210.5	1260.5	1323.0	1405.7
27.5°	1159.0	1208.9	1279.2	1366.7
30°	1119.9	1168.3	1235.5	1329.2
32.5°	1073.0	1119.9	1190.2	1288.6
35°	1019.9	1073.0	1140.2	1240.2
37.5°	979.3	1027.7	1098.0	1193.3
40°	935.6	977.8	1046.5	1140.2
42.5°	888.7	935.6	994.9	1088.7
45°	845.0	879.4	940.3	1029.3
47.5°	798.1	837.2	884.1	952.8
50°	748.2	781.0	832.5	879.4
52.5°	699.7	726.3	770.0	806.0
55°	648.2	674.8	707.6	729.4
57.5°	599.8	618.5	640.4	654.4
60°	540.4	559.2	573.2	587.3
62.5°	487.3	501.4	509.2	517.0
65°	432.7	440.5	445.1	451.4
67.5°	373.3	381.1	382.7	392.0
70°	318.6	320.2	323.3	328.0
72.5°	267.1	270.2	268.7	271.8
75°	214.0	217.1	214.0	217.1
77.5°	162.4	165.6	165.6	170.3
80°	117.1	118.7	120.3	120.3
82.5°	76.5	81.2	78.1	79.7
85°	43.7	45.3	45.3	46.9
87.5°	20.3	21.9	20.3	23.4
90°	2.7	2.0	1.2	0.4
92.5°	12.0	11.5	11.1	10.6
95°	22.5	21.9	21.4	20.8
97.5°	35.3	35.0	34.6	34.2
100°	49.3	48.8	48.4	47.9
102.5°	64.5	64.2	64.0	63.8
105°	79.8	79.6	79.5	79.3
107.5°	97.9	97.8	97.7	97.6
110°	115.0	114.8	114.7	114.5

TEST NUMBER: P1011329

CATALOG NUMBER: S123DIP-B1165D365UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	132.4	132.3	132.3	132.2
115°	150.5	150.2	150.0	149.8
117.5°	168.0	167.9	167.8	167.7
120°	185.7	185.2	184.8	184.3
122.5°	202.5	202.2	201.9	201.6
125°	219.9	219.7	219.4	219.2
127.5°	236.8	236.3	235.9	235.4
130°	253.5	252.8	252.2	251.6
132.5°	269.7	269.1	268.4	267.8
135°	285.8	285.3	284.9	284.4
137.5°	300.7	300.4	300.0	299.6
140°	316.6	316.2	315.8	315.4
142.5°	331.0	330.7	330.3	329.9
145°	345.5	345.3	345.2	345.0
147.5°	359.0	358.7	358.4	358.1
150°	372.3	372.1	372.0	371.8
152.5°	383.8	383.5	383.3	383.1
155°	395.1	395.1	395.1	395.1
157.5°	405.0	405.1	405.2	405.3
160°	414.3	414.5	414.6	414.8
162.5°	422.5	422.8	423.0	423.2
165°	429.6	429.8	430.1	430.3
167.5°	435.4	435.7	436.0	436.3
170°	440.3	440.6	440.9	441.2
172.5°	444.2	444.5	444.8	445.1
175°	446.7	447.0	447.3	447.6
177.5°	448.1	448.4	448.7	449.0
180°	448.6	448.6	448.6	448.6

(END OF REPORT)