

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P980492

Luminaire Tested: PRLX-243-940-LL4-F-U-S-BLAK-X

Issue Date: 4/3/2025

Test Information

Test Method: LM-79-2024
Report Number: P980492
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2502-353-37)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/3/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-243-940-LL4-F-U-S-BLAK-X
Description: 3D PRINTED LUMINAIRE, INTEGRAL LED LIGHT ENGINE, BLACK 243 SHADE WITH FROSTED LENS
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2286.4 lumens
Efficiency: N/A
Efficacy: 111.5 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.31
Luminous Opening: Circular (Dia: 1.67' x H: 0')
CIE Type: Direct

Input Watts (W): 20.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P980492
CATALOG NUMBER: PRLX-243-940-LL4-F-U-S-BLAK-X

Luminous Intensity Polar Plot

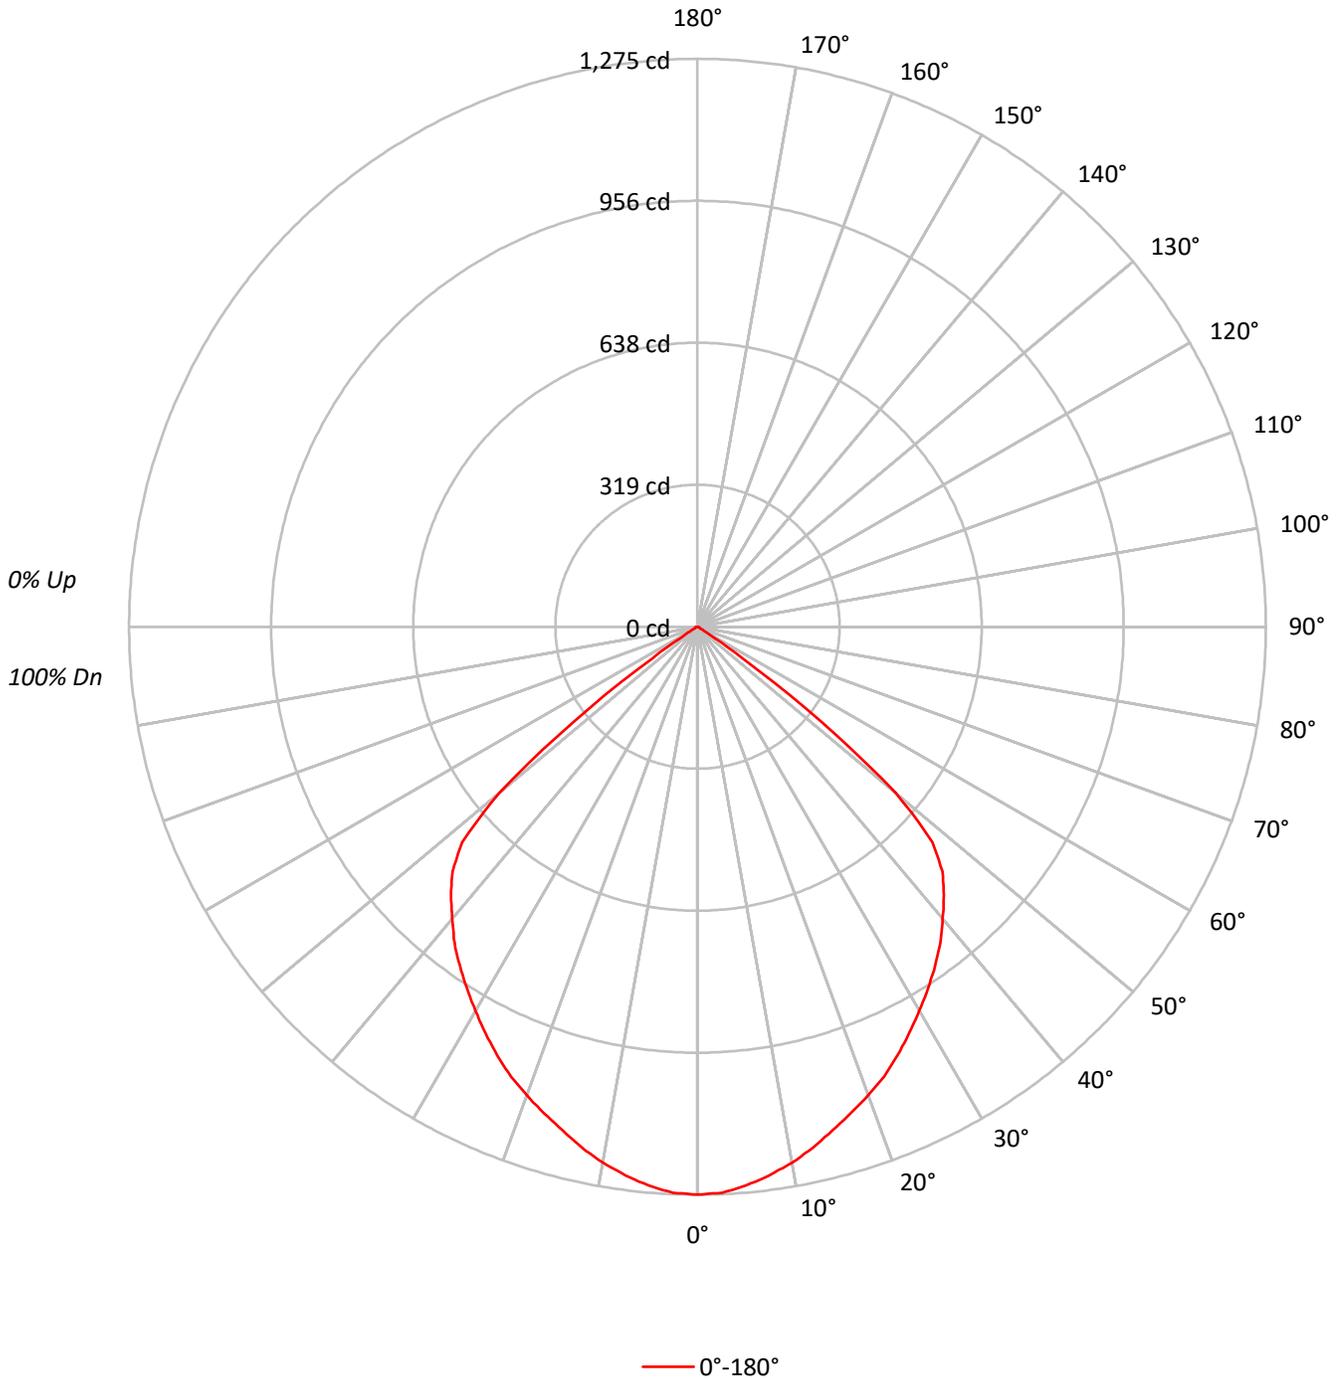



TEST NUMBER: P980492

CATALOG NUMBER: PRLX-243-940-LL4-F-U-S-BLAK-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73
4	91	82	75	70	89	80	74	69	78	73	68	76	71	67	74	70	67	65
5	85	74	67	62	83	73	67	62	71	66	61	70	64	60	68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55	64	58	54	63	58	54	52
7	74	62	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	69	57	50	45	68	57	50	45	56	49	45	54	49	44	53	48	44	43
9	65	53	46	41	64	52	46	41	51	45	41	50	45	40	49	44	40	39
10	61	49	42	37	60	49	42	37	48	41	37	47	41	37	46	41	37	35

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	6289
5°	6236
10°	6121
15°	5976
20°	5876
25°	5782
30°	5673
35°	5597
40°	5511
45°	5420
50°	4458
55°	1053
60°	61
65°	61
70°	75
75°	78
80°	60
85°	57

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5420 cd/sqm

TEST NUMBER: P980492

CATALOG NUMBER: PRLX-243-940-LL4-F-U-S-BLAK-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.0	5.2
10°-20°	330.4	14.5
20°-30°	489.1	21.4
30°-40°	581.4	25.4
40°-50°	583.8	25.5
50°-60°	172.0	7.5
60°-70°	5.3	0.2
70°-80°	3.9	0.2
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	938.5	41.0
0°-40°	1519.9	66.5
0°-60°	2275.7	99.5
0°-90°	2286.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2286.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1275	
5°	1259	119
15°	1170	330
25°	1062	489
35°	929	581
45°	777	584
55°	122	172
65°	5	5
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P980492

CATALOG NUMBER: PRLX-243-940-LL4-F-U-S-BLAK-X

CANDELA DISTRIBUTION (FULL):

0°	
0°	1274.7
2.5°	1271.6
5°	1259.1
7.5°	1241.5
10°	1221.8
12.5°	1197.9
15°	1169.9
17.5°	1145.0
20°	1119.1
22.5°	1093.2
25°	1062.1
27.5°	1028.9
30°	995.7
32.5°	962.5
35°	929.3
37.5°	895.1
40°	855.7
42.5°	818.3
45°	776.8
47.5°	715.6
50°	580.8
52.5°	350.6
55°	122.4
57.5°	23.9
60°	6.2
62.5°	5.2
65°	5.2
67.5°	5.2
70°	5.2
72.5°	4.1
75°	4.1
77.5°	3.1
80°	2.1
82.5°	2.1
85°	1.0
87.5°	1.0
90°	0.0



TEST NUMBER: P980492
 CATALOG NUMBER: PRLX-243-940-LL4-F-U-S-BLAK-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00